



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CHEVROLET 257012
 Component
Transmission (Auto)
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez préciser la marque, le type et la viscosité de l'huile lors de votre prochain échantillon.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0088208	---	---
Sample Date		Client Info		23 May 2024	---	---
Machine Age	kms	Client Info		76699	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>160	140	---	---
Chromium	ppm	ASTM D5185(m)	>5	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>50	19	---	---
Lead	ppm	ASTM D5185(m)	>50	<1	---	---
Copper	ppm	ASTM D5185(m)	>225	35	---	---
Tin	ppm	ASTM D5185(m)	>10	1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION












Il n'y a aucun indice de contamination dans le fluide.

Silicon	ppm	ASTM D5185(m)	>20	8	---	---
Potassium	ppm	ASTM D5185(m)	>20	10	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol	%	ASTM D7922*		0.0	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		8	---	---
Boron	ppm	ASTM D5185(m)		59	---	---
Barium	ppm	ASTM D5185(m)		2	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		17	---	---
Magnesium	ppm	ASTM D5185(m)		1	---	---
Calcium	ppm	ASTM D5185(m)		65	---	---
Phosphorus	ppm	ASTM D5185(m)		165	---	---
Zinc	ppm	ASTM D5185(m)		6	---	---
Sulfur	ppm	ASTM D5185(m)		1482	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		27.4	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		5.4	---	---
Viscosity Index (VI)	Scale	ASTM D2270*		135	---	---

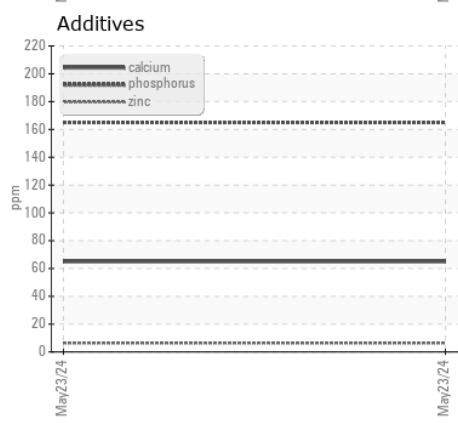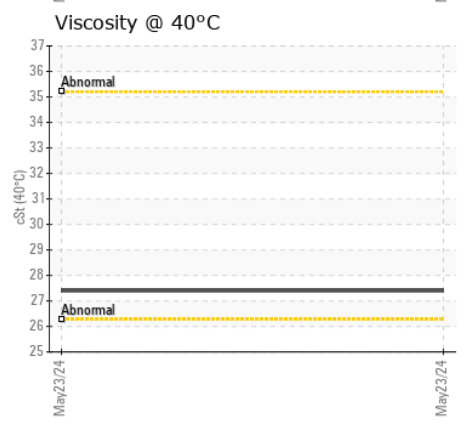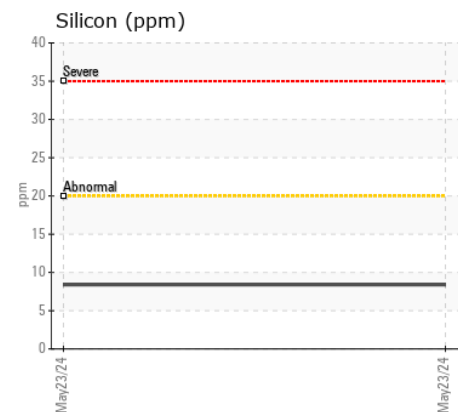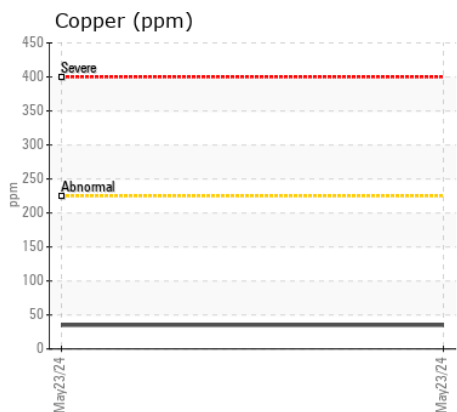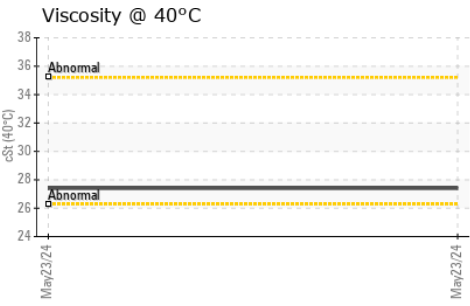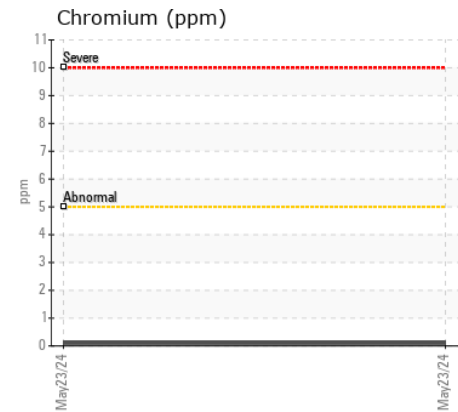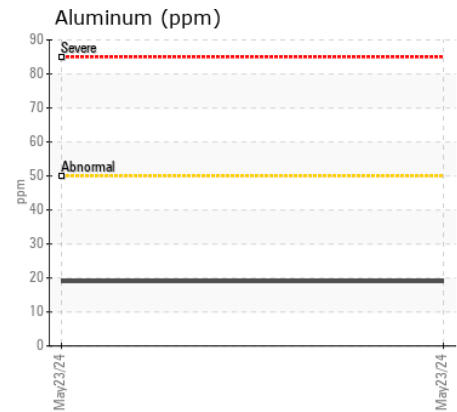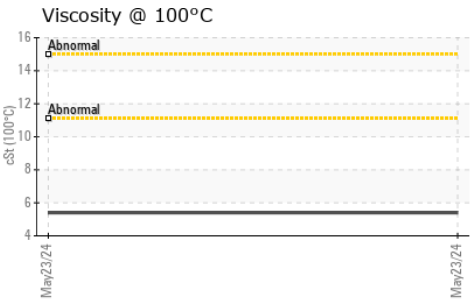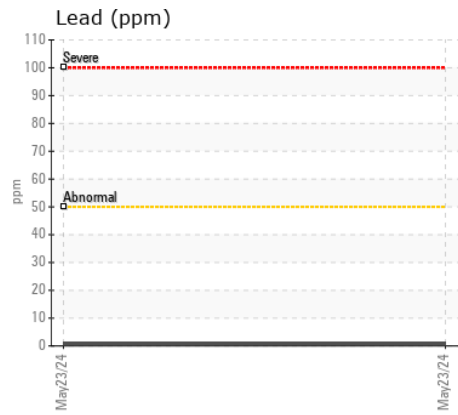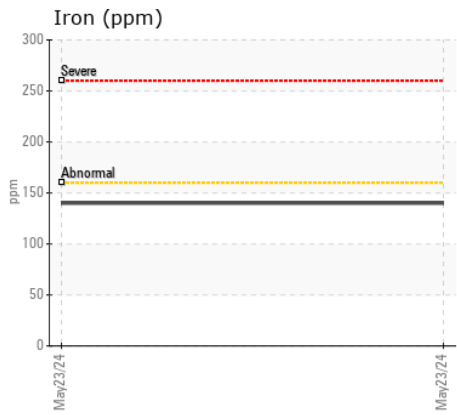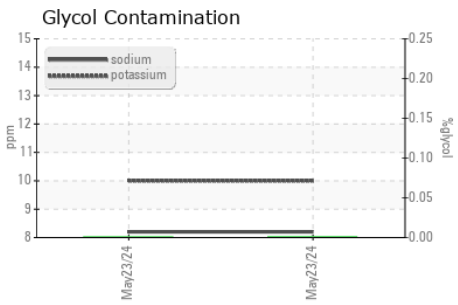

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0088208 **Received** : 03 Jun 2024
Lab Number : 02639446 **Tested** : 04 Jun 2024
Unique Number : 5788608 **Diagnosed** : 04 Jun 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: Glycol, KV100, VI)

GFL Environmental 791MAT - Matane
 29 rue Brilliant
 Matane, QC
 CA G4W 0J7
 Contact: B Berube
 bberube@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.