



LIEBHERR

OIL ANALYSIS REPORT

WEAR	SEVERE
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH22M 137772-1525
Component
Splitter Box
Fluid
{not provided} (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0232638	---	---
Sample Date		Client Info		28 May 2024	---	---
Machine Age	hrs	Client Info		2312	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		None	---	---
Sample Status				SEVERE	---	---

WEAR

Copper ppm levels are severe. Bearing and/or bushing wear is indicated.

Iron	ppm	ASTM D5185(m)	>100	53	---	---
Chromium	ppm	ASTM D5185(m)	>5	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	5	---	---
Lead	ppm	ASTM D5185(m)	>30	2	---	---
Copper	ppm	ASTM D5185(m)	>20	▲ 82	---	---
Tin	ppm	ASTM D5185(m)	>10	2	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	2	---	---
Potassium	ppm	ASTM D5185(m)	>20	5	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185(m)	>25	38	---	---
Boron	ppm	ASTM D5185(m)		6	---	---
Barium	ppm	ASTM D5185(m)		2	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		24	---	---
Magnesium	ppm	ASTM D5185(m)		7	---	---
Calcium	ppm	ASTM D5185(m)		3294	---	---
Phosphorus	ppm	ASTM D5185(m)		1059	---	---
Zinc	ppm	ASTM D5185(m)		1113	---	---
Sulfur	ppm	ASTM D5185(m)		7926	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		42.3	---	---

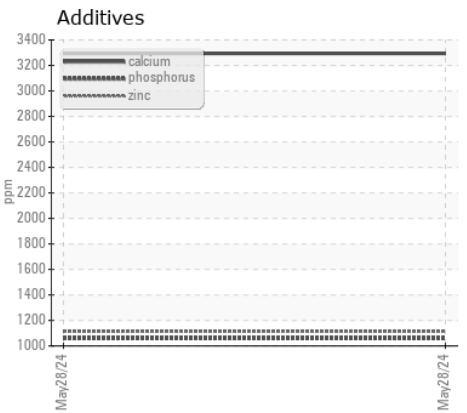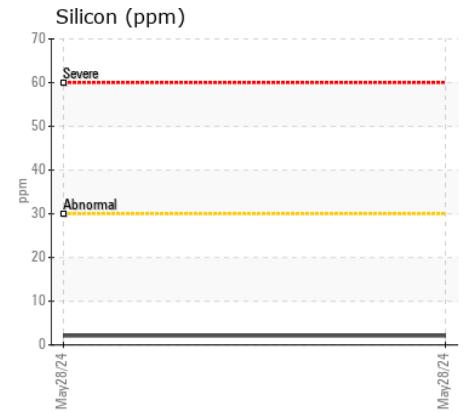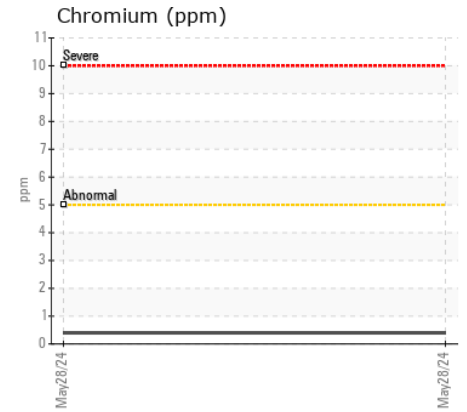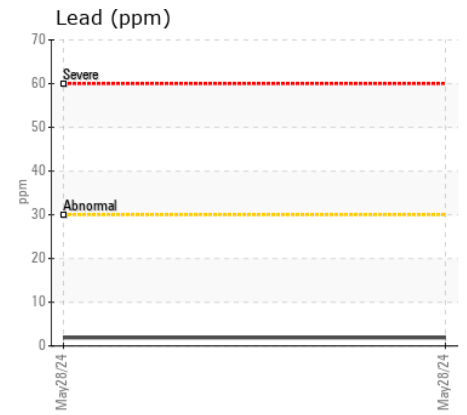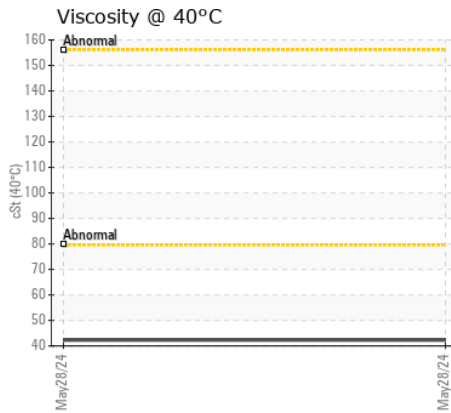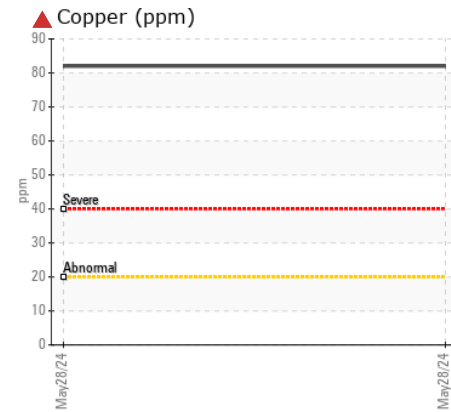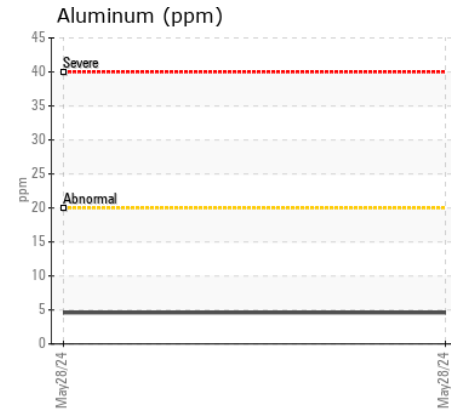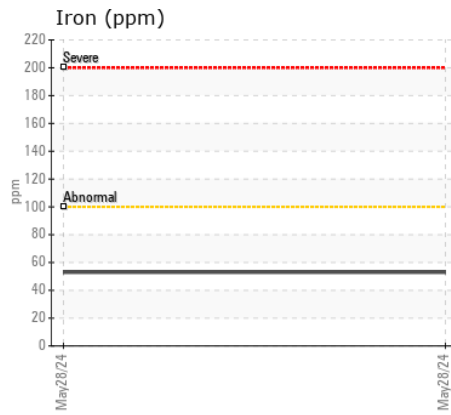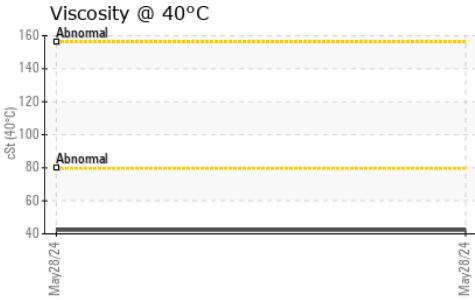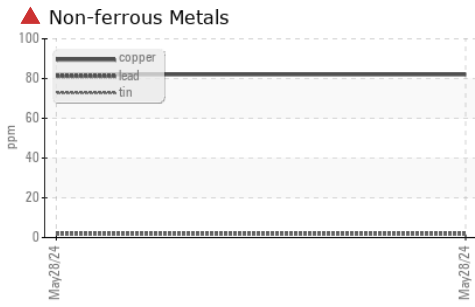

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0232638 **Received** : 03 Jun 2024
Lab Number : 02639457 **Tested** : 03 Jun 2024
Unique Number : 5788619 **Diagnosed** : 03 Jun 2024 - Kevin Marson
Test Package : MOBCE

Excavation Dolbeau Inc.
 493 - 2ieme Avenue
 Dolbeau-Mistassini, QC
 CA G8L 1V3
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: