



Machine Id
MACK 929129

Component
Coolant

Fluid
EXTENDED LIFE COOLANT (--- GAL)

RECOMMENDATION

Le fluide peut encore servir. Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0088209	GFL0080935	---
Sample Date		Client Info		30 May 2024	15 Jun 2023	---
Machine Age	hrs	Client Info		8128	6988	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

CORROSION

Les concentrations de tous les métaux sont normales indiquant qu'il n'y a pas de corrosion dans le système de refroidissement.

Iron	ppm	ASTM D5185(m)	>15	0	0	---
Aluminum	ppm	ASTM D5185(m)	>10	1	6	---
Copper	ppm	ASTM D5185(m)	>10	<1	0	---
Lead	ppm	ASTM D5185(m)	>10	0	1	---
Tin	ppm	ASTM D5185(m)	>10	0	0	---
Silver	ppm	ASTM D5185(m)	>10	<1	<1	---
Zinc	ppm	ASTM D5185(m)	>10	2	2	---

CONTAMINANTS








Il n'y a aucun indice de contamination dans l'agent de refroidissement.

Calcium	ppm	ASTM D5185(m)	>100	8	8	---
Magnesium	ppm	ASTM D5185(m)	>40	1	3	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Coolant Appearance		Visual*	Clear	Clear	Cloudy	---

COOLANT CONDITION

Le niveau de nitrite est acceptable. Le niveau de pH de ce fluide est dans les limites acceptables. La réserve d'alcalinité de ce fluide est acceptable.

Boiling Point	°C	WC Method*		108	---	---
Specific Gravity		ASTM D1298*		1.070	1.073	---
pH	Scale 0-14	ASTM D1287*	9.0	7.79	8.90	---
Nitrites	ppm	Alcan Test Kit*		1560	1040	---
Reserve Alkalinity	Scale 0-20	ASTM D1121*		3.7	4.0	---
Percentage Glycol	%	ASTM D3321*	50	52.7	54.2	---
Freezing Point	°C	ASTM D3321*	-40	-40	-45	---
Carboxylate				---	---	---
Silicon	ppm	ASTM D5185(m)		66	45	---
Phosphorus	ppm	ASTM D5185(m)		16	12	---
Boron	ppm	ASTM D5185(m)		305	85	---
Molybdenum	ppm	ASTM D5185(m)		207	483	---
Sodium	ppm	ASTM D5185(m)		6897	4123	---
Potassium	ppm	ASTM D5185(m)		113	237	---
Coolant Color		Visual*	Orange/R	Pink	Red	---

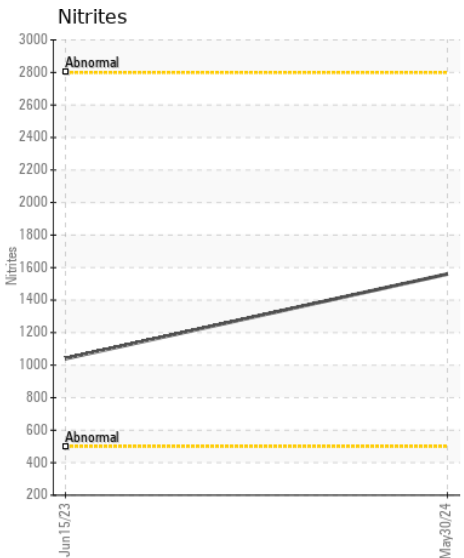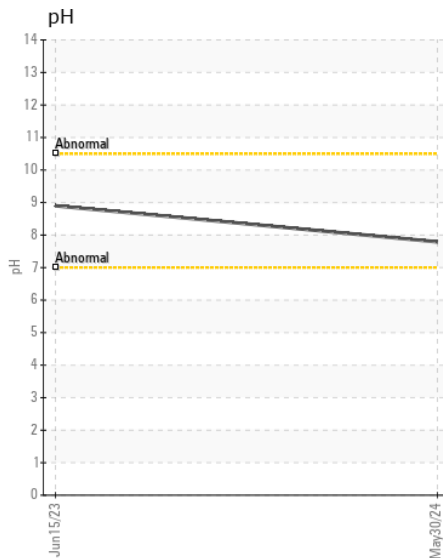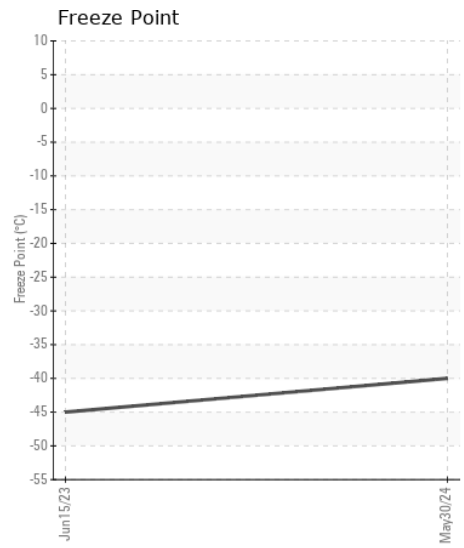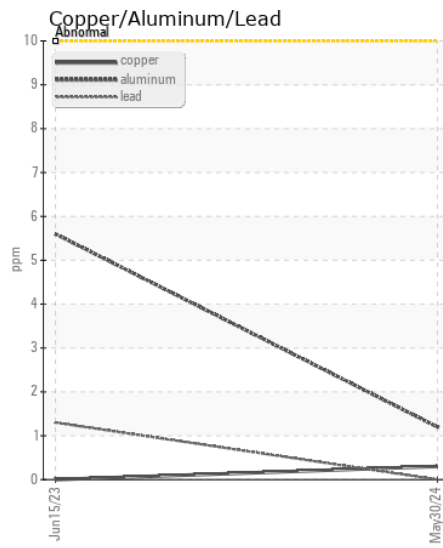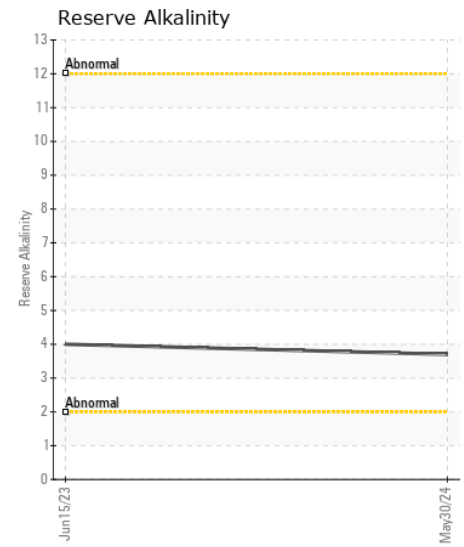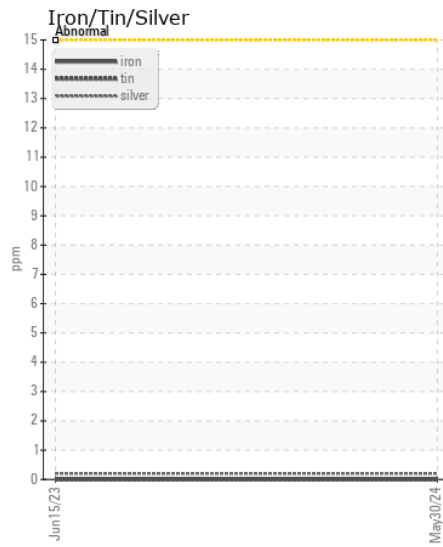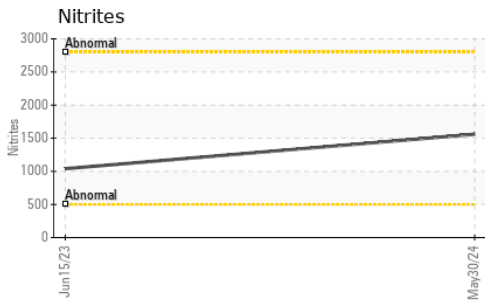

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0088209
Lab Number : 02639521
Unique Number : 5788683
Test Package : COOL (Additional Tests: GlycolType)
Received : 03 Jun 2024
Tested : 03 Jun 2024
Diagnosed : 04 Jun 2024 - Kevin Marson

GFL Environmental 791MAT - Matane
 29 rue Brilliant
 Matane, QC
 CA G4W 0J7
 Contact: B Berube
 bberube@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.