



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
UNKNOWN SHIP NAME
Machine Id
MARQUIS 2009 MARQUIS 50 SC
Component
Center Main Engine
Fluid
{not provided} (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0951267	---	---
Sample Date		Client Info		02 Jun 2024	---	---
Machine Age	hrs	Client Info		750	---	---
Oil Age	hrs	Client Info		20	---	---
Filter Age	hrs	Client Info		20	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>75	26	---	---
Chromium	ppm	ASTM D5185(m)	>8	0	---	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---	---
Titanium	ppm	ASTM D5185(m)	>3	0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>15	2	---	---
Lead	ppm	ASTM D5185(m)	>18	<1	---	---
Copper	ppm	ASTM D5185(m)	>80	4	---	---
Tin	ppm	ASTM D5185(m)	>14	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185(m)	>20	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	6	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	8.1	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.6	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>75	2	---	---
Boron	ppm	ASTM D5185(m)		156	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		2	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		57	---	---
Calcium	ppm	ASTM D5185(m)		2108	---	---
Phosphorus	ppm	ASTM D5185(m)		962	---	---
Zinc	ppm	ASTM D5185(m)		1123	---	---
Sulfur	ppm	ASTM D5185(m)		2908	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	18.6	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		14.8	---	---


FT-IR (Direct Trend)

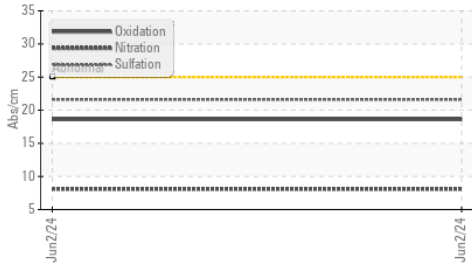


Viscosity @ 100°C

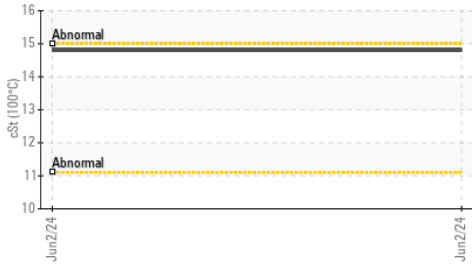


Ferrous Alloys

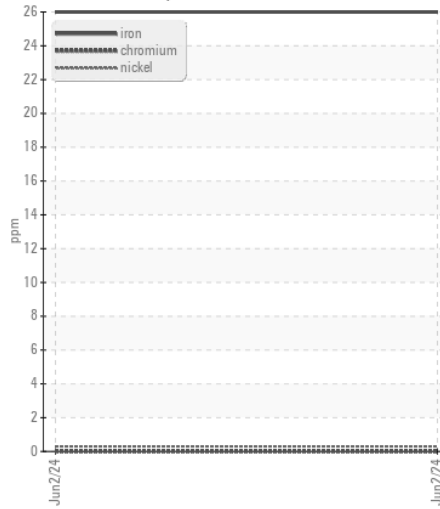

Non-ferrous Metals

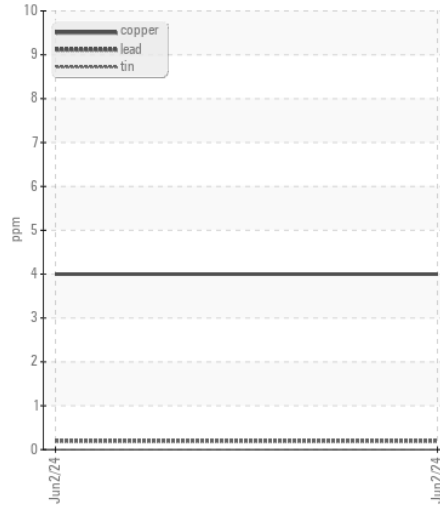

Viscosity @ 100°C

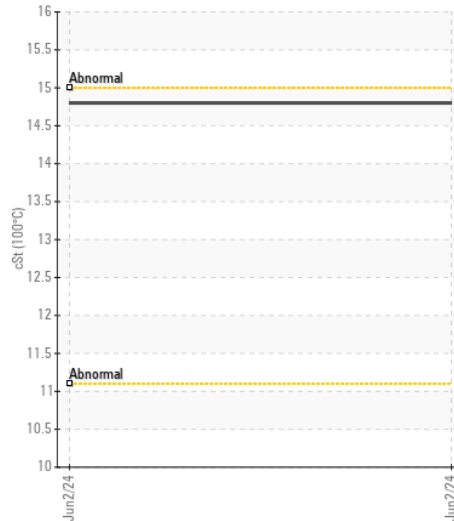

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0951267
Lab Number : 02639543
Unique Number : 5788705
Test Package : MAR 1
Received : 04 Jun 2024
Tested : 05 Jun 2024
Diagnosed : 05 Jun 2024 - Wes Davis

BEACHES MARINE BROKERAGE
 2146 A QUEEN ST E SUITE 106
 TORONTO, ON
 CA M4E 1E3
 Contact: CHARLES FARRAN
 beachesmarine@hotmail.com
 T: (416)691-0312
 F: (866)477-0666

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.