



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
910069
Component
Diesel Engine
Fluid
CASTROL 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0100708	GFL0093119	GFL0093116
Sample Date		Client Info		29 May 2024	23 Feb 2024	28 Nov 2023
Machine Age	kms	Client Info		258661	244713	229477
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	14	13	14
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	0	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	10	7	4
Lead	ppm	ASTM D5185(m)	>40	0	0	<1
Copper	ppm	ASTM D5185(m)	>330	1	1	1
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	2	3
Potassium	ppm	ASTM D5185(m)	>20	9	4	2
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0.5	0.4	0.4
Nitration	Abs/cm	ASTM D7624*	>20	8.3	8.3	8.7
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.0	19.3	20.1
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>406	3	1	1
Boron	ppm	ASTM D5185(m)		7	6	7
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		51	51	51
Manganese	ppm	ASTM D5185(m)		<1	0	0
Magnesium	ppm	ASTM D5185(m)		809	827	800
Calcium	ppm	ASTM D5185(m)		1229	1249	1233
Phosphorus	ppm	ASTM D5185(m)		956	969	963
Zinc	ppm	ASTM D5185(m)		1161	1183	1147
Sulfur	ppm	ASTM D5185(m)		2478	2522	2572
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.0	14.5	14.9
Visc @ 100°C	cSt	ASTM D7279(m)		13.7	13.8	13.9

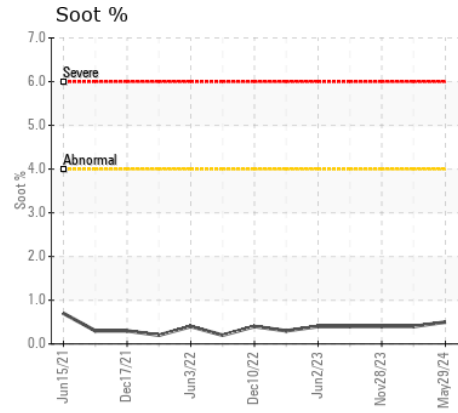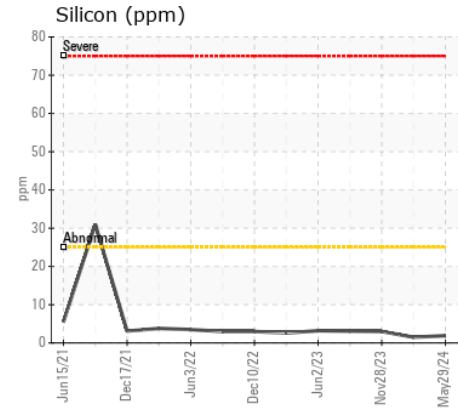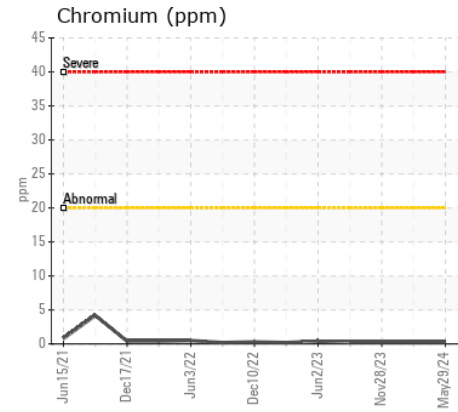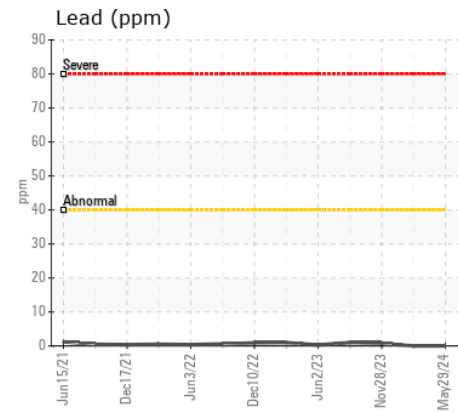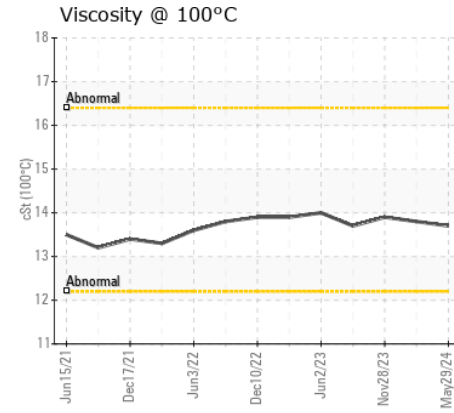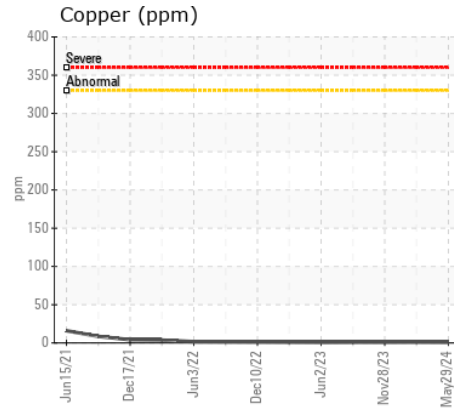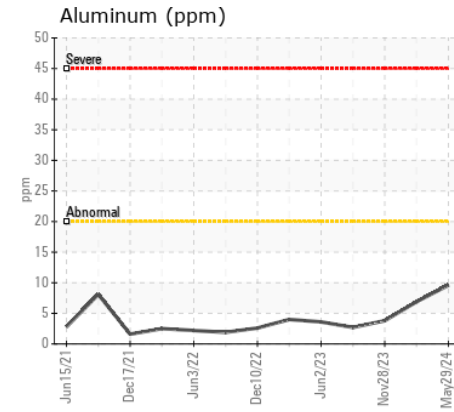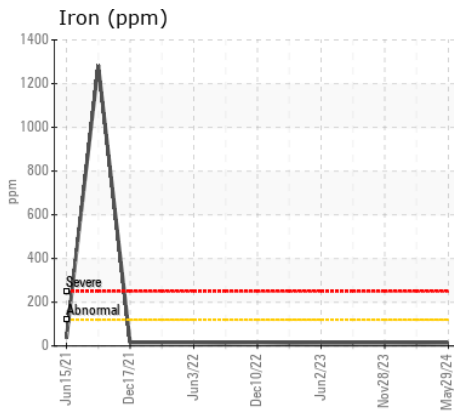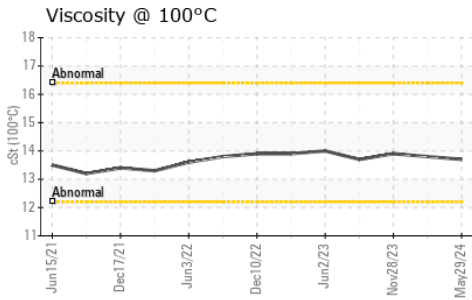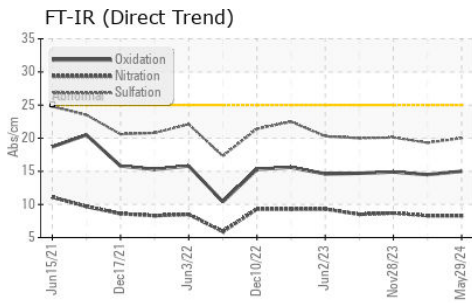

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0100708
Lab Number : 02639546
Unique Number : 5788708
Test Package : MOB 1
Received : 04 Jun 2024
Tested : 05 Jun 2024
Diagnosed : 05 Jun 2024 - Wes Davis

GFL Environmental - 861 - Moncton
 1095 CHAMPLAIN ST
 MONCTON, NB
 CA E1A 1P9
 Contact: Vicki Clark
 vclark@gflenv.com
 T: (506)457-1427
 F: (506)453-9490

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.