



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 300D ART06 - 1

Component
Right Final Drive

Fluid
APRIL SUPERFLO MULTIGRADE GEAR FLUID 80W90 (--- GAL)

RECOMMENDATION

Confirmez la source du lubrifiant utilisé pour l'appoint/remplissage.
Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASF0000420	WC0322217	---
Sample Date		Client Info		24 May 2024	04 Jul 2019	---
Machine Age	hrs	Client Info		13400	8213	---
Oil Age	hrs	Client Info		526	1636	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>750	18	39	---
Chromium	ppm	ASTM D5185(m)	>9	0	<1	---
Nickel	ppm	ASTM D5185(m)	>10	0	0	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>40	<1	<1	---
Lead	ppm	ASTM D5185(m)	>15	0	<1	---
Copper	ppm	ASTM D5185(m)	>40	<1	3	---
Tin	ppm	ASTM D5185(m)	>10	0	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION













Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>75	<1	2	---
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	---
Water		WC Method	>0.075	NEG	NEG	---
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*		4.2	---	---
Sulfation	Abs/.1mm	ASTM D7415*		19.5	---	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.075	NEG	NEG	---

FLUID CONDITION

Les niveaux d'additifs indiquent l'ajout d'une autre marque ou d'un autre type d'huile. L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)	>51	0	<1	---
Boron	ppm	ASTM D5185(m)		4	38	---
Barium	ppm	ASTM D5185(m)		0	0	---
Molybdenum	ppm	ASTM D5185(m)		<1	9	---
Manganese	ppm	ASTM D5185(m)		0	<1	---
Magnesium	ppm	ASTM D5185(m)		8	3	---
Calcium	ppm	ASTM D5185(m)		42	14	---
Phosphorus	ppm	ASTM D5185(m)		723	837	---
Zinc	ppm	ASTM D5185(m)		20	15	---
Sulfur	ppm	ASTM D5185(m)		15744	15988	---
Oxidation	Abs/.1mm	ASTM D7414*		8.6	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	152.5	137	132	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.05	14.3	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	102	102	---	---

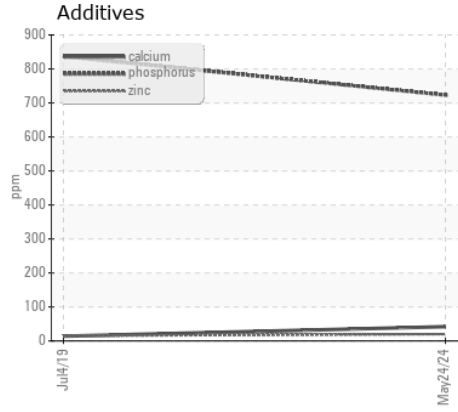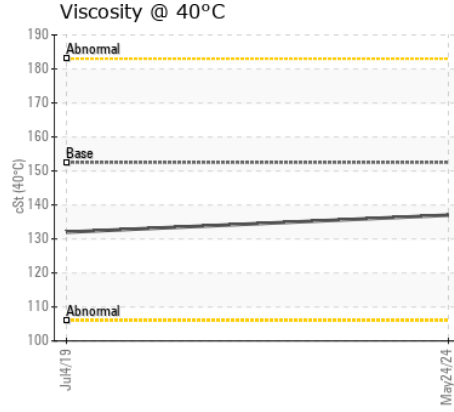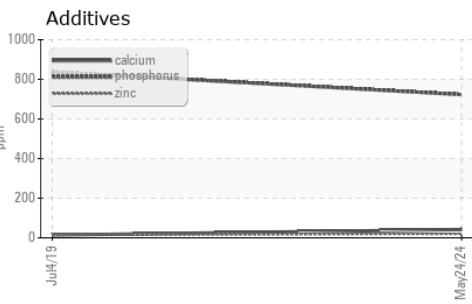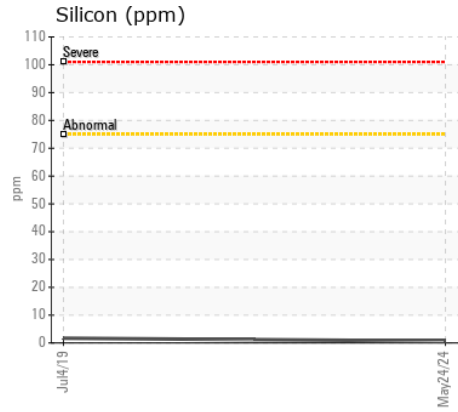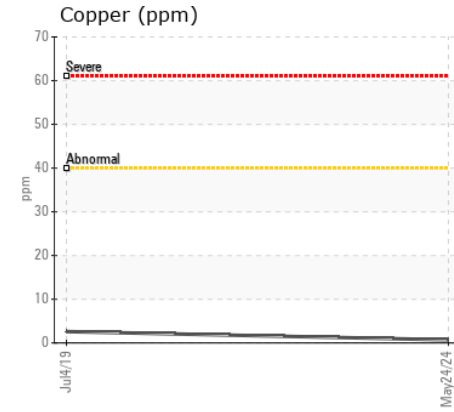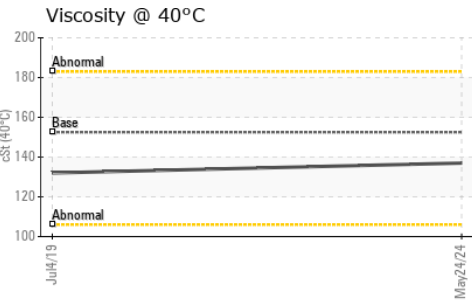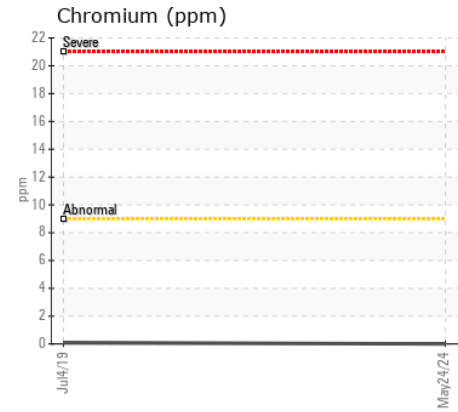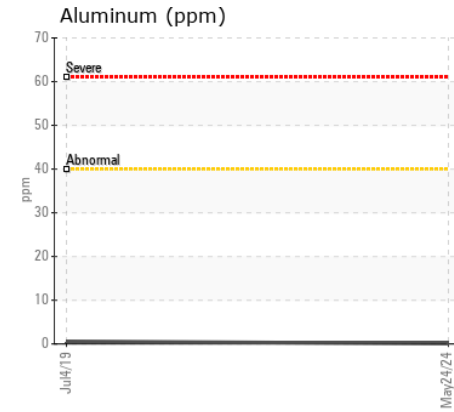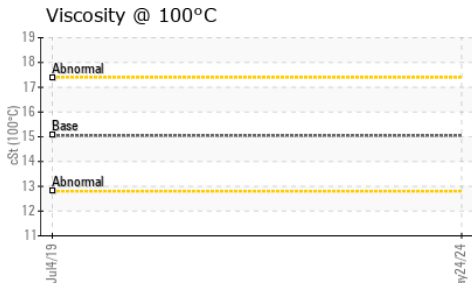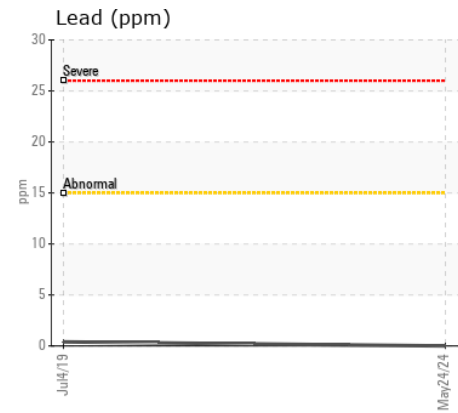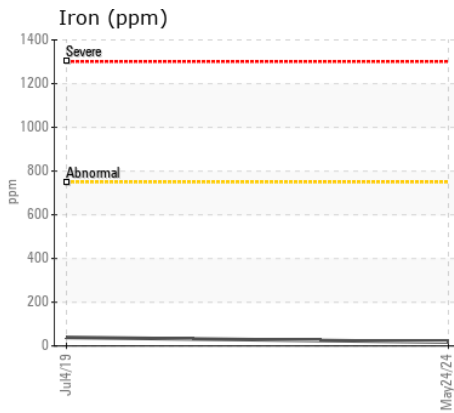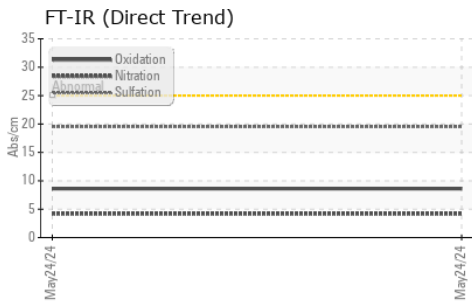

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : ASF0000420 **Received** : 04 Jun 2024
Lab Number : 02639562 **Tested** : 05 Jun 2024
Unique Number : 5788724 **Diagnosed** : 05 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: FT-IR, KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

April Super Flo
 9 rue Beland
 L'Isle-Verte, QC
 CA G0L 1K0
 Contact: Michel Jalbert
 mjalbert@aprilsuperflo.com
 T:
 F: (418)898-2192