



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**113006**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SAE 10W30 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0118562</b>	GFL0107875	---
Sample Date		Client Info		<b>06 May 2024</b>	05 Feb 2024	---
Machine Age	kms	Client Info		<b>54783</b>	47407	---
Oil Age	kms	Client Info		<b>0</b>	0	---
Filter Age	kms	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

**WEAR**

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	<b>14</b>	18	---
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>6</b>	10	---
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	<1	---
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	VLITE	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**











Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>3</b>	4	---
Potassium	ppm	ASTM D5185(m)	>20	<b>14</b>	19	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	ASTM D7844*	>3	<b>0.2</b>	0.2	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.6</b>	7.8	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.4</b>	19.9	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>1</b>	1	---
Boron	ppm	ASTM D5185(m)	1	<b>6</b>	8	---
Barium	ppm	ASTM D5185(m)	1	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m)	1	<b>60</b>	60	---
Manganese	ppm	ASTM D5185(m)	1	<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185(m)	10	<b>976</b>	951	---
Calcium	ppm	ASTM D5185(m)	2942	<b>1080</b>	1099	---
Phosphorus	ppm	ASTM D5185(m)	1102	<b>966</b>	1010	---
Zinc	ppm	ASTM D5185(m)	1351	<b>1172</b>	1181	---
Sulfur	ppm	ASTM D5185(m)	3903	<b>2473</b>	2695	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>15.9</b>	15.9	---
Visc @ 100°C	cSt	ASTM D7279(m)	11.4	<b>10.8</b>	10.8	---

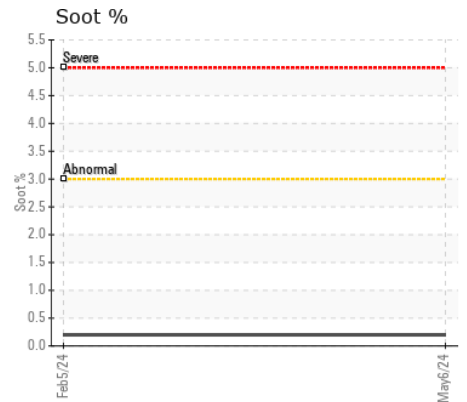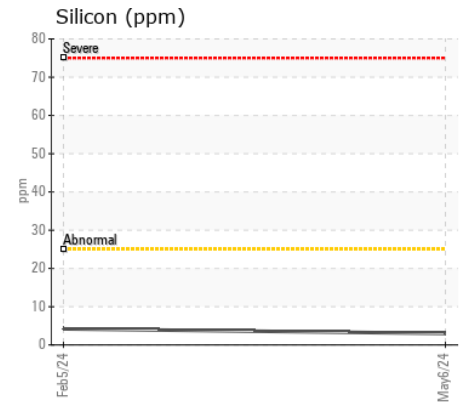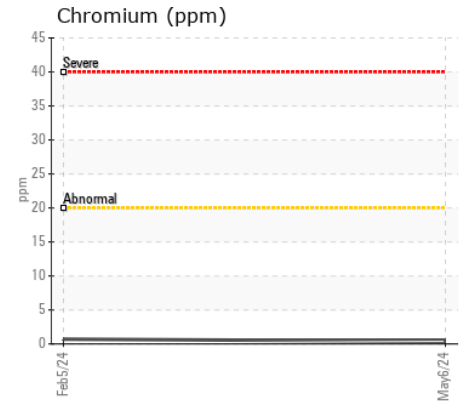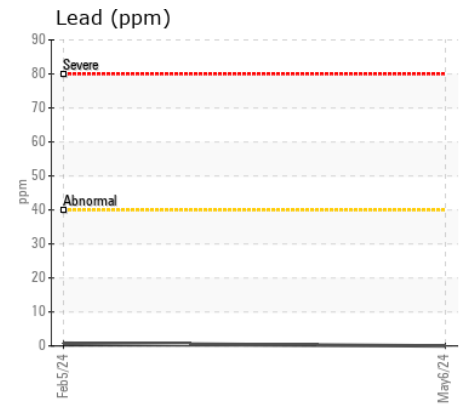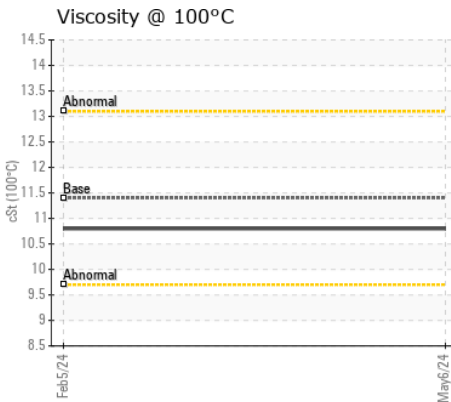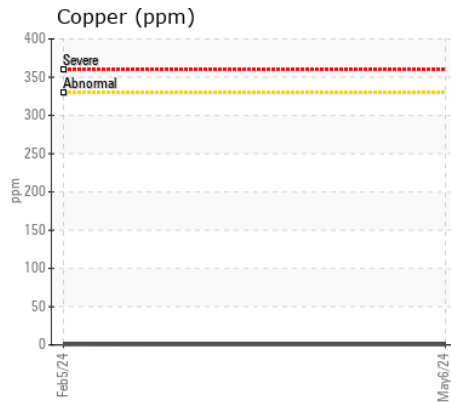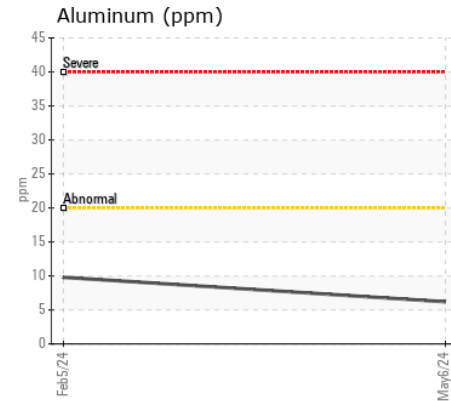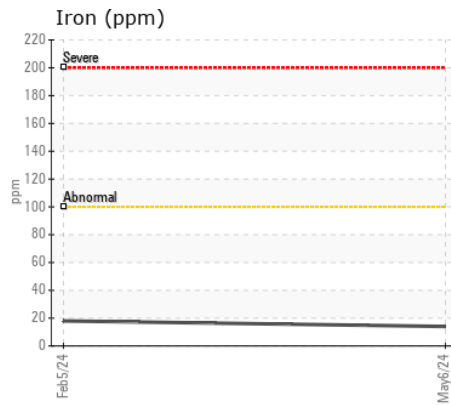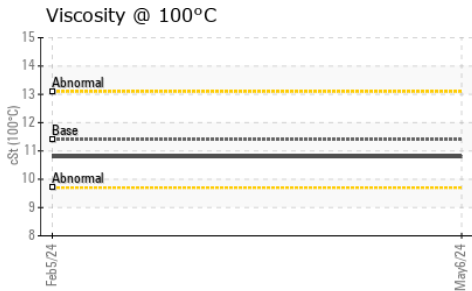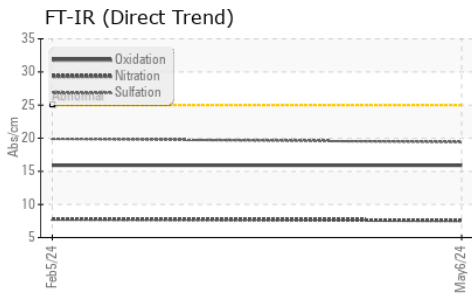

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0118562 **Received** : 04 Jun 2024  
**Lab Number** : 02639579 **Tested** : 05 Jun 2024  
**Unique Number** : 5788741 **Diagnosed** : 05 Jun 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Visual )

**GFL Environmental - 310 - Winnipeg**  
 #360 – 555 Hervo Street,  
 Winnipeg, MB  
 CA R3T 3L6  
 Contact: Joshua Lourenco  
 jlourenco@gflenv.com  
 T: (204)987-9600  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.