



Machine Id
731099
Component
Natural Gas Engine
Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0117127	GFL0097782	GFL0054903
Sample Date		Client Info		03 Jun 2024	02 Jan 2024	01 Aug 2023
Machine Age	hrs	Client Info		7830	6711	5414
Oil Age	hrs	Client Info		1200	1200	1200
Filter Age	hrs	Client Info		1200	1200	1200
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>50	14	12	14
Chromium	ppm	ASTM D5185(m)	>4	1	1	2
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		<1	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>9	2	3	2
Lead	ppm	ASTM D5185(m)	>30	2	5	8
Copper	ppm	ASTM D5185(m)	>35	2	1	2
Tin	ppm	ASTM D5185(m)	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>+100	3	3	4
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Soot %	%	ASTM D7844*		0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	12.2	11.2	12.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	24.6	23.9	26.6
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		8	7	9
Boron	ppm	ASTM D5185(m)	50	10	14	8
Barium	ppm	ASTM D5185(m)	5	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	60	71	61
Manganese	ppm	ASTM D5185(m)	0	<1	0	<1
Magnesium	ppm	ASTM D5185(m)	560	654	516	647
Calcium	ppm	ASTM D5185(m)	1510	1763	1748	1703
Phosphorus	ppm	ASTM D5185(m)	780	801	745	790
Zinc	ppm	ASTM D5185(m)	870	1027	963	1016
Sulfur	ppm	ASTM D5185(m)	2040	2104	2304	2129
Oxidation	Abs/.1mm	ASTM D7414*	>25	19.8	18.3	21.3
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	14.5	14.2	14.3

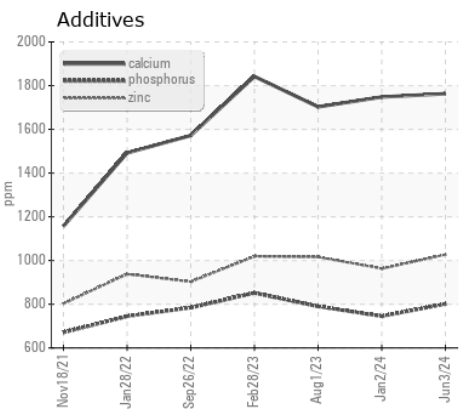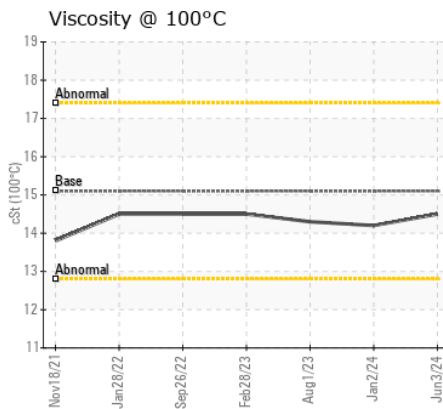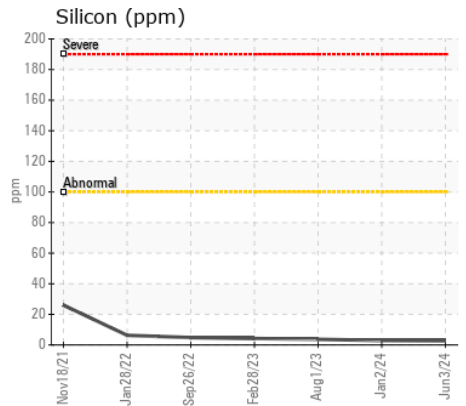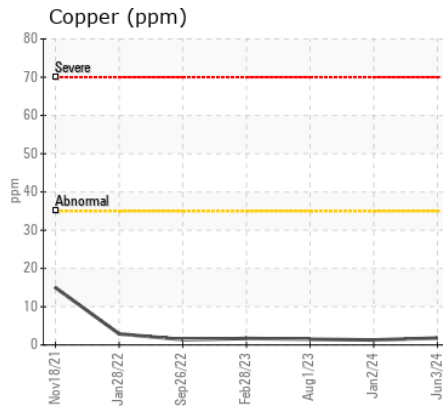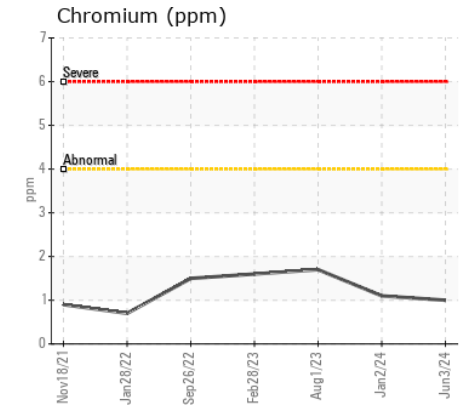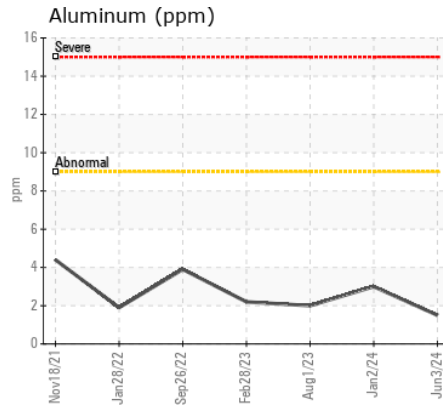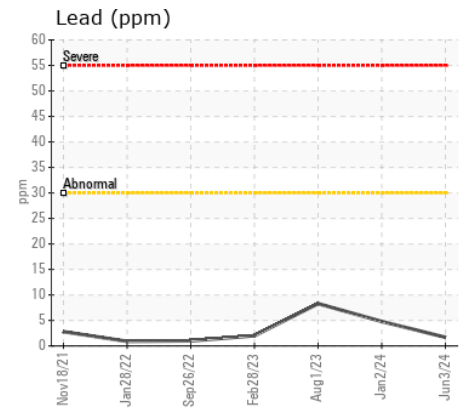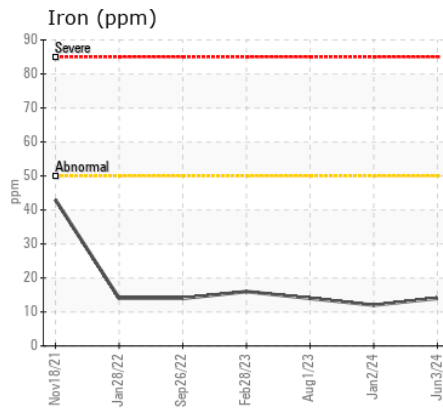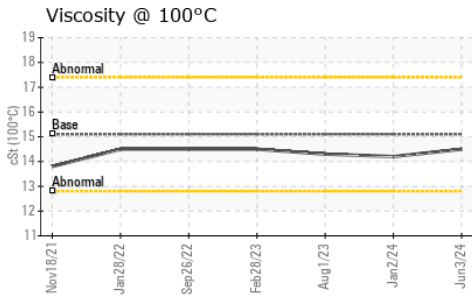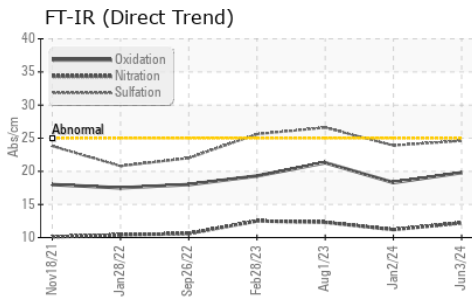

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0117127
Lab Number : 02639772
Unique Number : 5788934
Test Package : MOB 1 (Additional Tests: Visual)

GFL Environmental - 209 - Hamilton
 560 Seaman Street
 Stoney Creek, ON
 CA L8E 3X7
 Contact: Fred Carleton
 fred.carleton@gflenv.com
 T: (289)925-6693
 F: (905)664-9008

*To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.*