



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
MICHAUDVILLE

Machine Id
1203

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL 10W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0082952	PC0078439	PC0077381
Sample Date		Client Info		04 Jun 2024	03 Dec 2023	30 Aug 2023
Machine Age	hrs	Client Info		12480	11974	11505
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	15	12	8
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	4	4	3
Lead	ppm	ASTM D5185(m)	>40	0	<1	<1
Copper	ppm	ASTM D5185(m)	>330	3	2	3
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185(m)	>25	5	6	6
Potassium	ppm	ASTM D5185(m)	>20	4	4	4
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.1	0.2	0.1
Nitration	Abs/cm	ASTM D7624*	>20	8.1	7.7	7.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.6	18.9	21.2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	2	2
Boron	ppm	ASTM D5185(m)	250	1	1	2
Barium	ppm	ASTM D5185(m)	10	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	100	58	57	57
Manganese	ppm	ASTM D5185(m)		<1	0	<1
Magnesium	ppm	ASTM D5185(m)	450	905	927	933
Calcium	ppm	ASTM D5185(m)	3000	1152	1051	1166
Phosphorus	ppm	ASTM D5185(m)	1150	1041	964	1084
Zinc	ppm	ASTM D5185(m)	1350	1188	1160	1209
Sulfur	ppm	ASTM D5185(m)	4250	2518	2440	2668
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.2	15.4	15.5
Visc @ 40°C	cSt	ASTM D7279(m)	105	92.4	93.1	91.1
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.7	13.7	13.6
Viscosity Index (VI)	Scale	ASTM D2270*	126	150	149	151


FT-IR (Direct Trend)

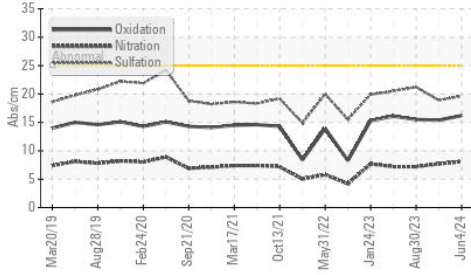


Viscosity @ 100°C

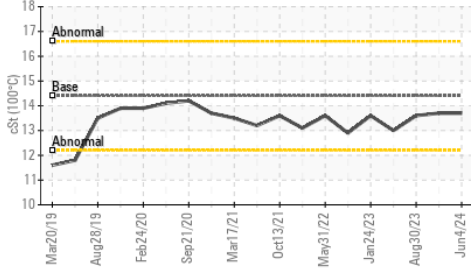


Viscosity @ 40°C

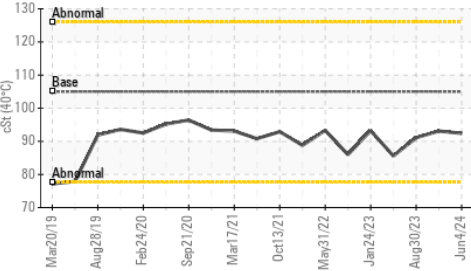


Iron (ppm)

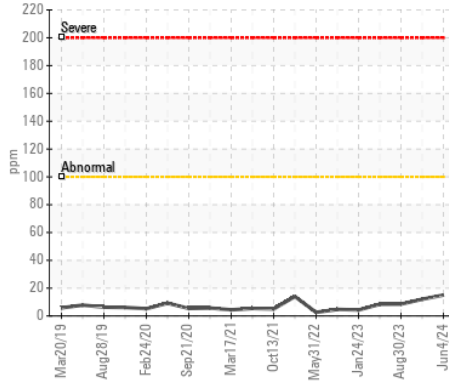


Aluminum (ppm)

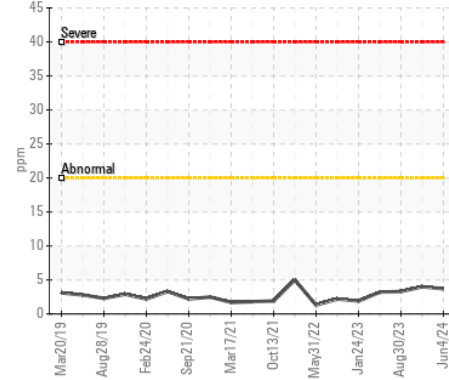


Copper (ppm)

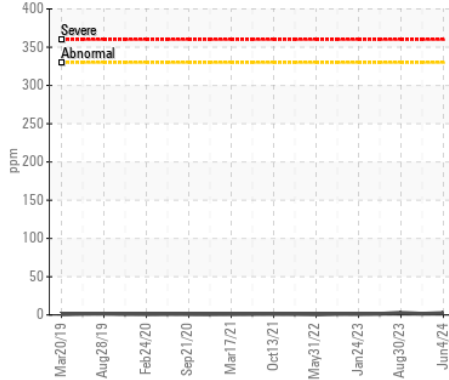


Viscosity @ 100°C

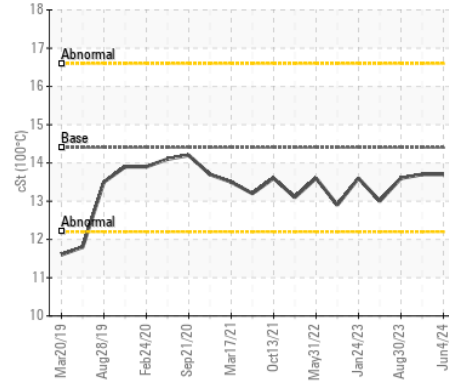


Lead (ppm)

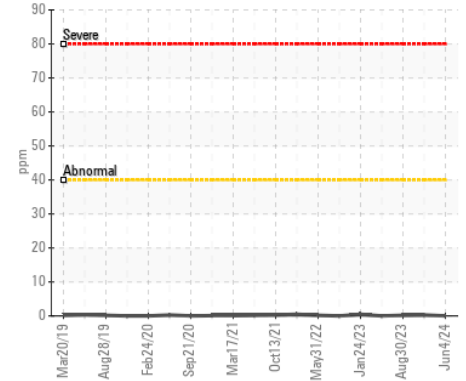


Chromium (ppm)

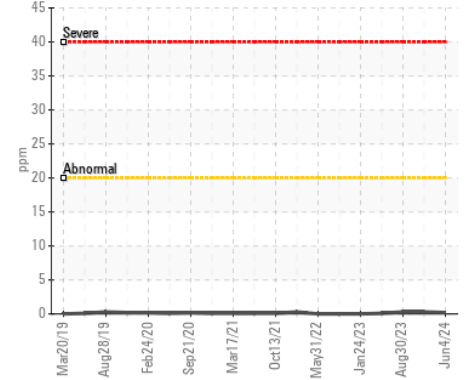

Silicon (ppm)

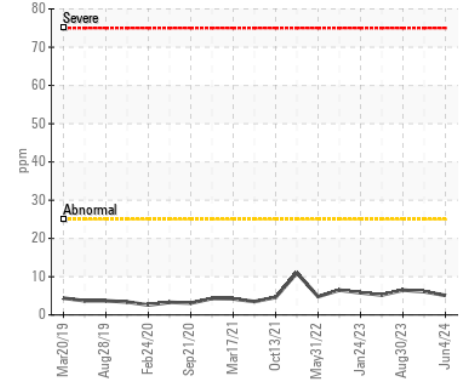

Soot %

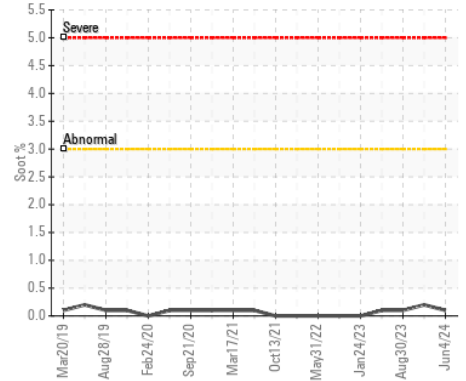

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Sample No. : PC0082952

Lab Number : 02639789

Unique Number : 5788951

Test Package : MOB 1 (Additional Tests: KV40, VI)

Received : 05 Jun 2024

Tested : 05 Jun 2024

Diagnosed : 05 Jun 2024 - Wes Davis

LES ENTREPRISES MICHAUVILLE INC.

270 RUE BRUNET

MONT ST-HILAIRE, QC

CA J3H 0M6

Contact: Martin Trudel

mtrudel@michaudville.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

T:

F: