



WEAR	NORMAL
CONTAMINATION	MARGINAL
FLUID CONDITION	ABNORMAL

Machine Id
420007
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is SAE 30 Diesel Engine Oil. Please confirm the oil type and grade, and specify the brand of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0100577	---	---
Sample Date		Client Info		04 Jun 2024	---	---
Machine Age	kms	Client Info		235815	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	14	---	---
Chromium	ppm	ASTM D5185(m)	>20	2	---	---
Nickel	ppm	ASTM D5185(m)	>4	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	---	---
Lead	ppm	ASTM D5185(m)	>40	6	---	---
Copper	ppm	ASTM D5185(m)	>330	4	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION












Light fuel dilution occurring.

Silicon	ppm	ASTM D5185(m)	>25	2	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Fuel	%	ASTM D7593*	>5	▲ 4.7	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0.4	---	---
Nitration	Abs/cm	ASTM D7624*	>20	7.6	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.9	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

Fuel is present in the oil and is lowering the viscosity. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	---	---
Boron	ppm	ASTM D5185(m)		7	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		57	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		893	---	---
Calcium	ppm	ASTM D5185(m)		1080	---	---
Phosphorus	ppm	ASTM D5185(m)		966	---	---
Zinc	ppm	ASTM D5185(m)		1113	---	---
Sulfur	ppm	ASTM D5185(m)		2355	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.6	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		▲ 12.0	---	---

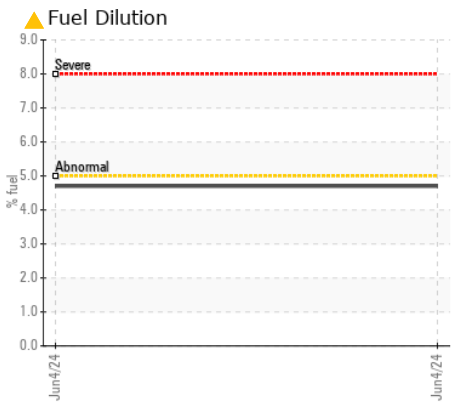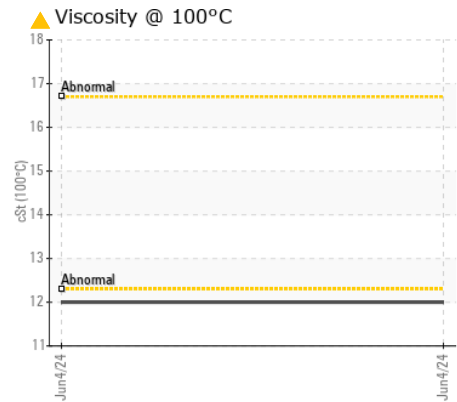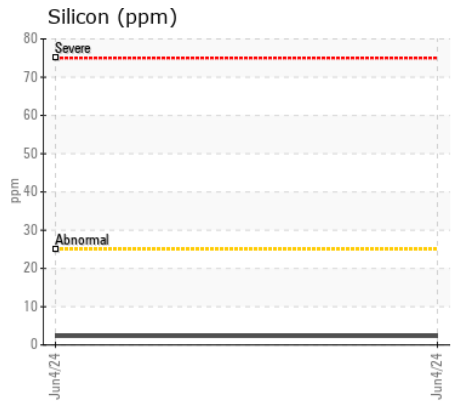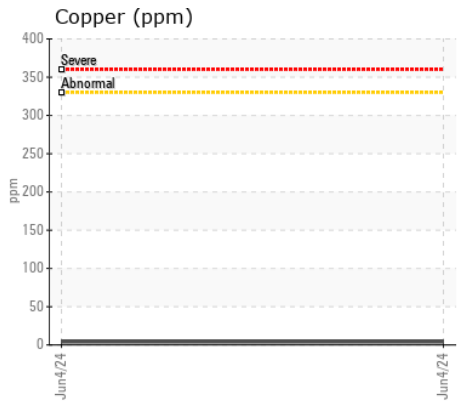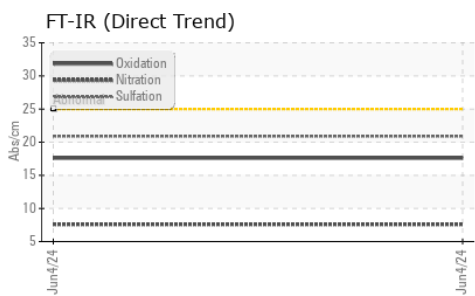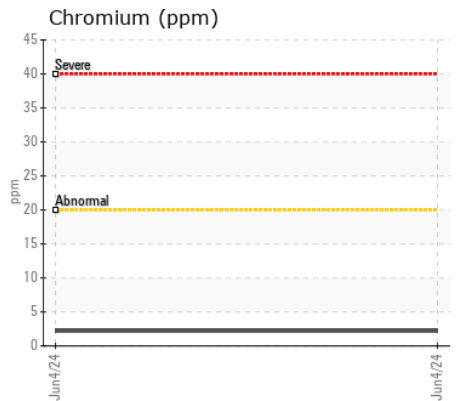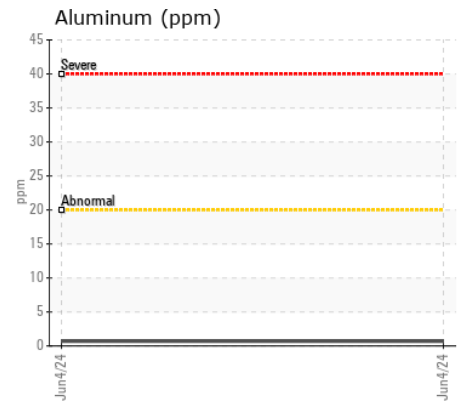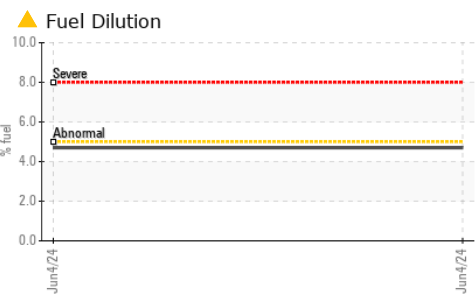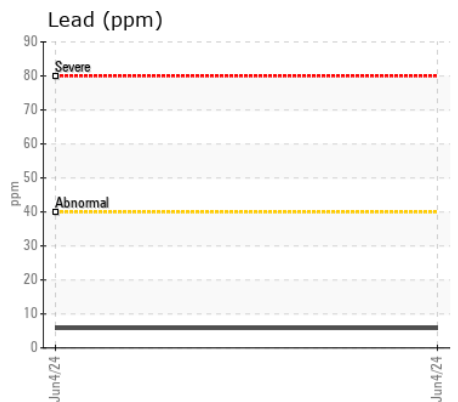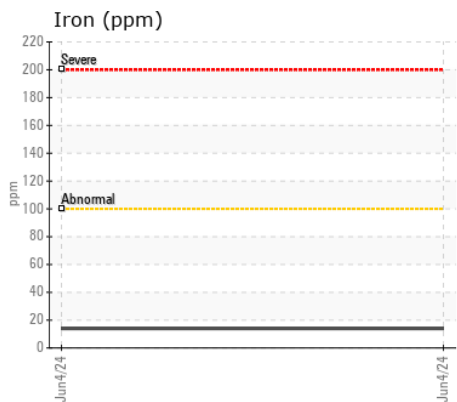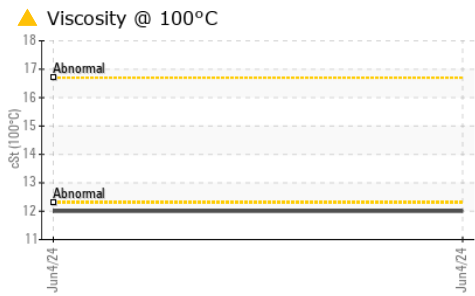

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0100577
Lab Number : 02639795
Unique Number : 5788957
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, Visual)

GFL Environmental - 575 - Squamish Hauling
 38950 Queens Way,
 Squamish, BC
 CA V8B 0K8
 Contact: Dean Imbeau
 dimbeau@gflenv.com
 T: (604)892-5604
 F: (604)892-5238

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.