



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**BRODERSON 29**  
Component  
**Diesel Engine**  
Fluid  
**SAE 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0917732</b>	---	---
Sample Date		Client Info		<b>15 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>4583</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>11</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>1</b>	---	---
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	ASTM D7844*	>3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.2</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>18.2</b>	---	---
Silt	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>57	<b>2</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>5</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>72</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>962</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>1025</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>1057</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>1186</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>2595</b>	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>16.1</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.5	<b>14.2</b>	---	---

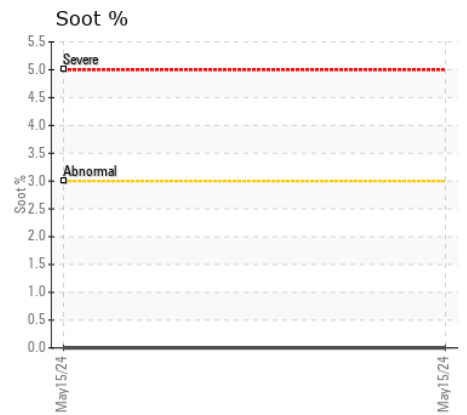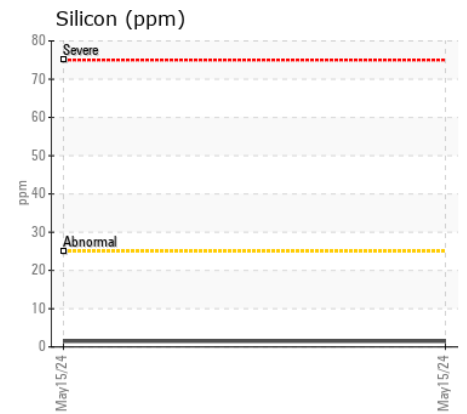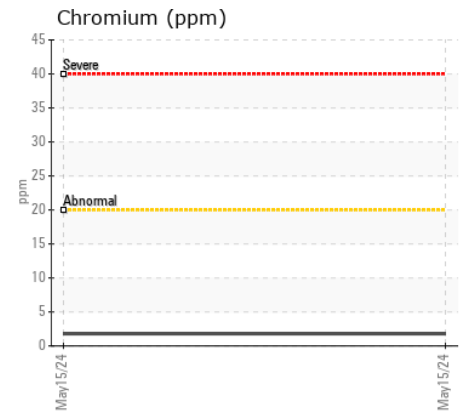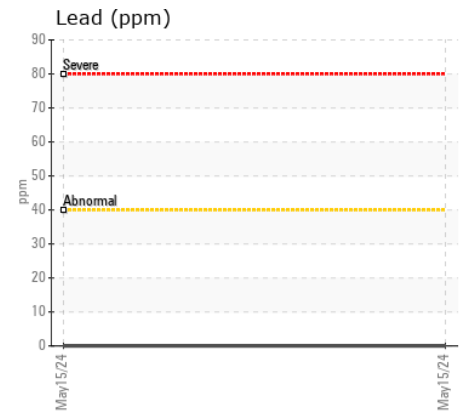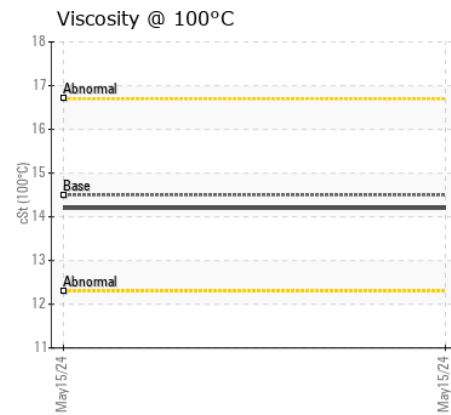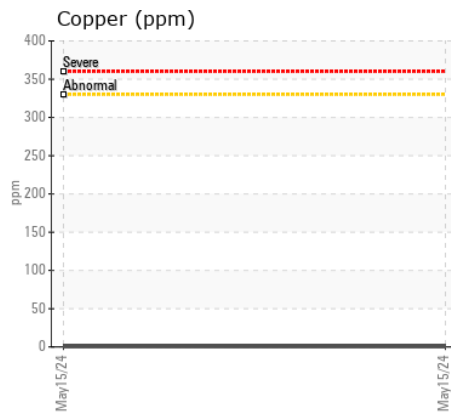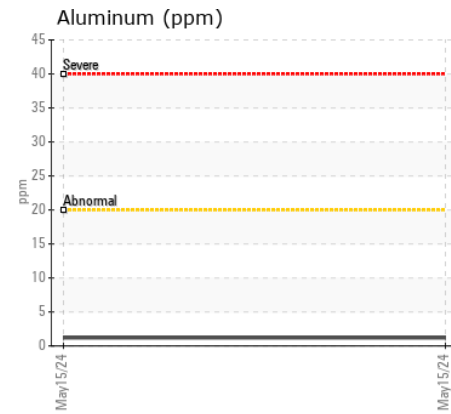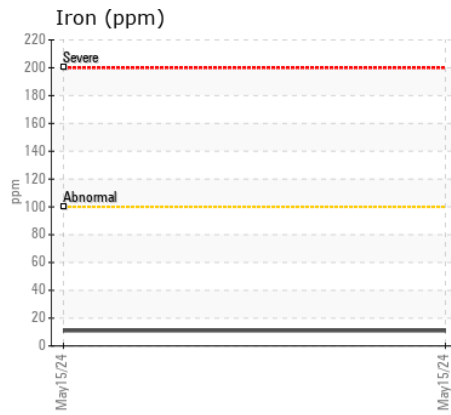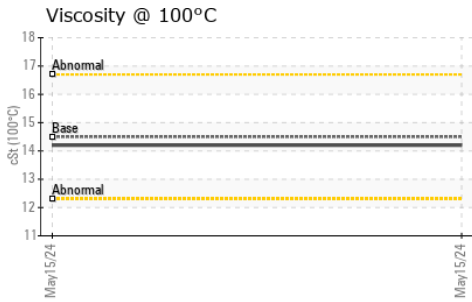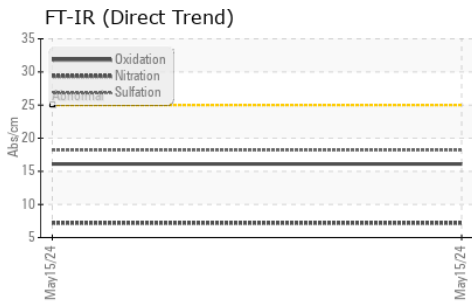

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0917732 **Received** : 05 Jun 2024  
**Lab Number** : 02639810 **Tested** : 05 Jun 2024  
**Unique Number** : 5788972 **Diagnosed** : 05 Jun 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Visual )

**DeSantis Crane**  
 294 Fifty Rd  
 Stoney Creek, ON  
 CA L8E 5L1  
 Contact: Jon Lawrence  
 jon@desantiscrane.com  
 T: (905)512-3569  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.