



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
REGION OF WATERLOO [406065]

Machine Id
VOLVO L120H 633154

Component
Transmission (Auto)

Fluid
VOLVO AT 102 (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP448163	VCP393125	VCP394302
Sample Date		Client Info		29 May 2024	18 Feb 2024	11 Jan 2024
Machine Age	hrs	Client Info		5042	4500	4039
Oil Age	hrs	Client Info		1000	500	4000
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Changed
Filter Changed		Client Info		Not Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>160	12	10	27
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	0
Aluminum	ppm	ASTM D5185(m)	>50	1	1	3
Lead	ppm	ASTM D5185(m)	>50	0	0	<1
Copper	ppm	ASTM D5185(m)	>225	2	2	4
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	2	2	4
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of fluid.
The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	1	1
Boron	ppm	ASTM D5185(m)	187	86	91	82
Barium	ppm	ASTM D5185(m)	0.0	<1	<1	<1
Molybdenum	ppm	ASTM D5185(m)	0.0	0	0	<1
Manganese	ppm	ASTM D5185(m)	0.0	<1	0	<1
Magnesium	ppm	ASTM D5185(m)	6.8	2	2	8
Calcium	ppm	ASTM D5185(m)	215	73	73	97
Phosphorus	ppm	ASTM D5185(m)	445	205	195	211
Zinc	ppm	ASTM D5185(m)	56	7	7	23
Sulfur	ppm	ASTM D5185(m)	1336	1636	1591	1500
Visc @ 40°C	cSt	ASTM D7279(m)	35.3	27.6	27.7	26.4

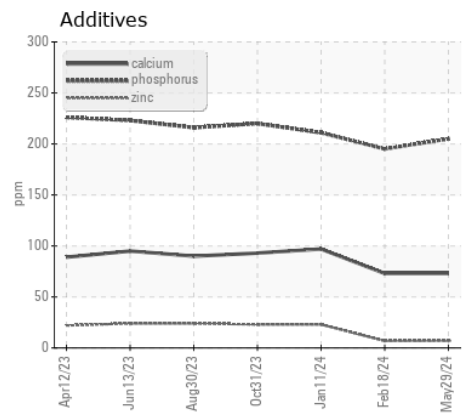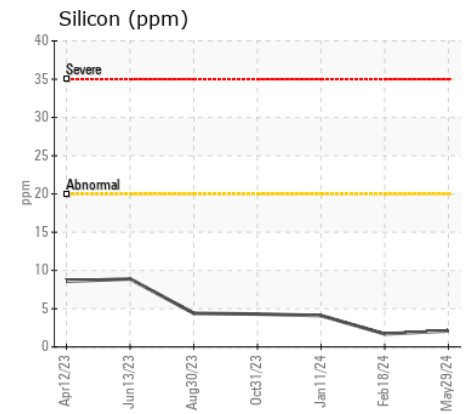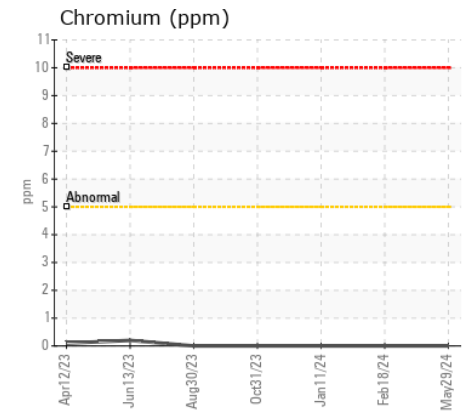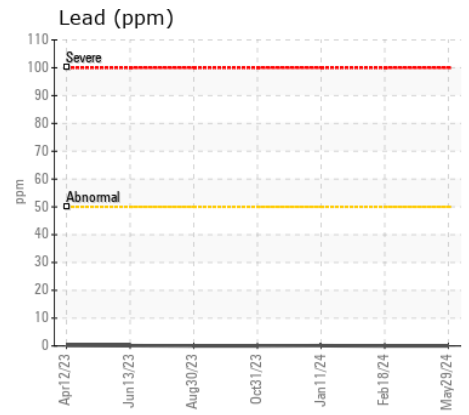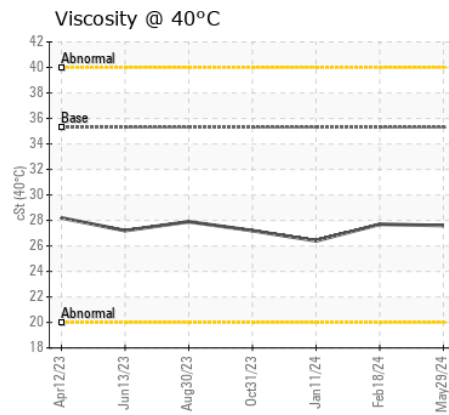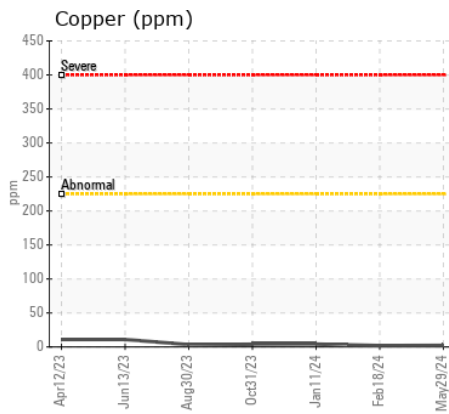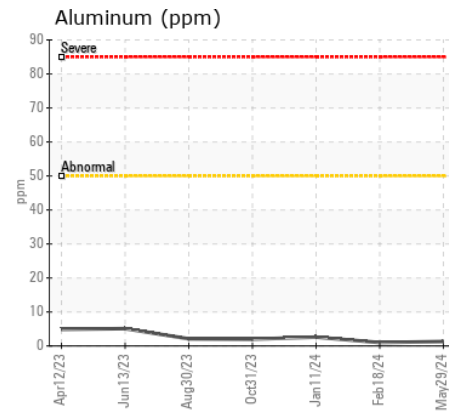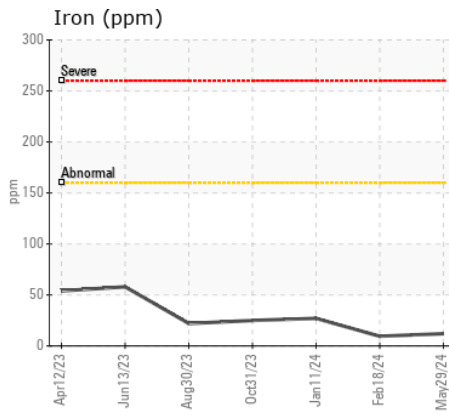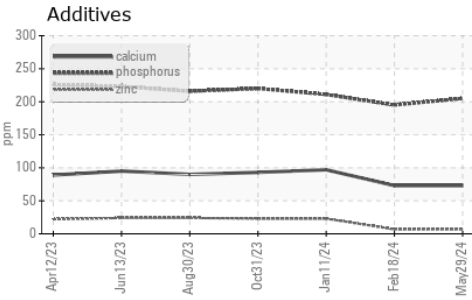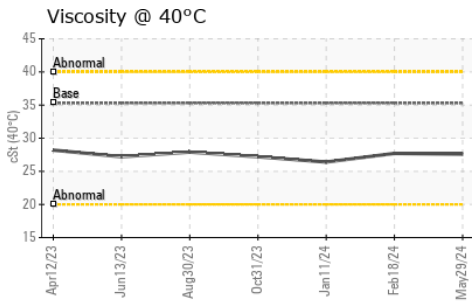

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP448163
Lab Number : 02639932
Unique Number : 5789094
Test Package : MOB 1
Received : 05 Jun 2024
Tested : 06 Jun 2024
Diagnosed : 06 Jun 2024 - Wes Davis

Strongco Equipment
 5179 Fountain St N.
 Breslau, ON
 CA N0B 1M0
 Contact: Eric Mailloux
 emailoux@strongco.com
 T: (519)744-3518
 F: (519)744-3284

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.