



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
931044
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqu que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

WEAR

Les taux d'usure de tous les composants sont normaux.











CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0088689	---	---
Sample Date		Client Info		04 Jun 2024	---	---
Machine Age	hrs	Client Info		5827	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185(m)	>300	91	---	---
Chromium	ppm	ASTM D5185(m)	>2	0	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)	>3	0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>70	45	---	---
Lead	ppm	ASTM D5185(m)	>85	78	---	---
Copper	ppm	ASTM D5185(m)	>90	25	---	---
Tin	ppm	ASTM D5185(m)	>10	4	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>20	6	---	---
Potassium	ppm	ASTM D5185(m)	>20	6	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185(m)		8	---	---
Boron	ppm	ASTM D5185(m)		84	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		<1	---	---
Manganese	ppm	ASTM D5185(m)		2	---	---
Magnesium	ppm	ASTM D5185(m)		<1	---	---
Calcium	ppm	ASTM D5185(m)		38	---	---
Phosphorus	ppm	ASTM D5185(m)		277	---	---
Zinc	ppm	ASTM D5185(m)		34	---	---
Sulfur	ppm	ASTM D5185(m)		636	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	35.9	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	5.5	7.0	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	155	160	---	---

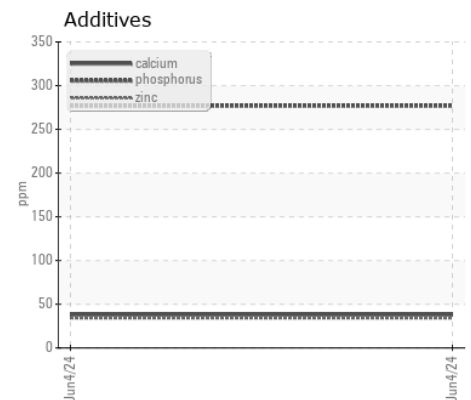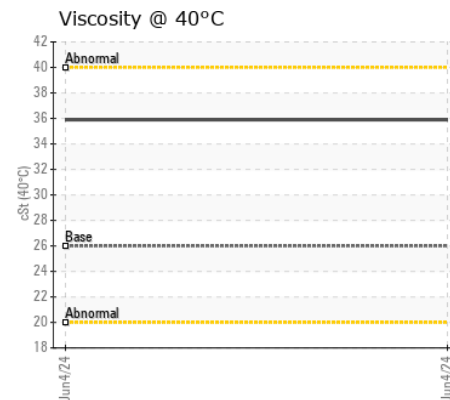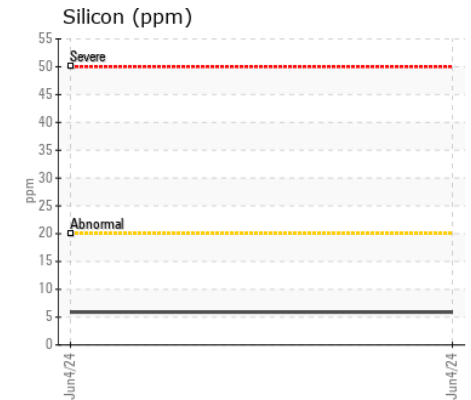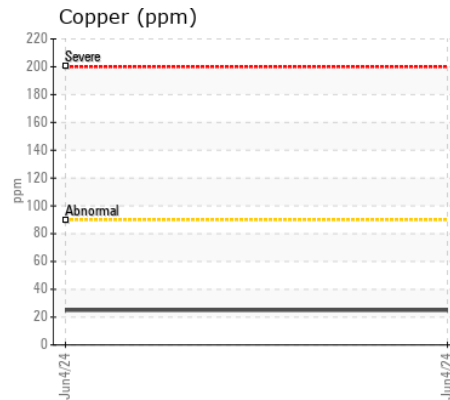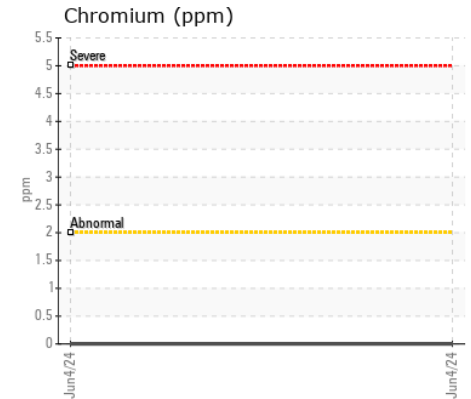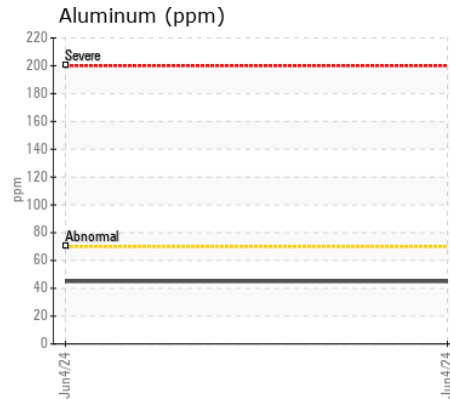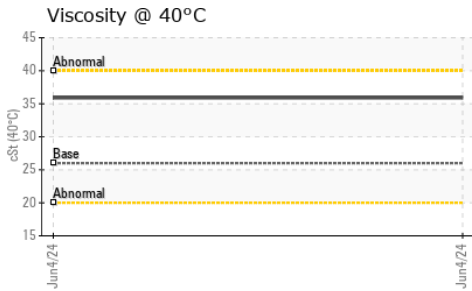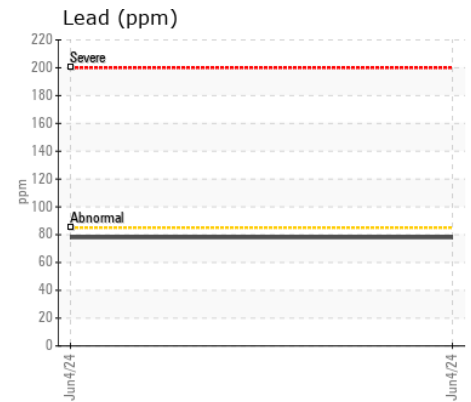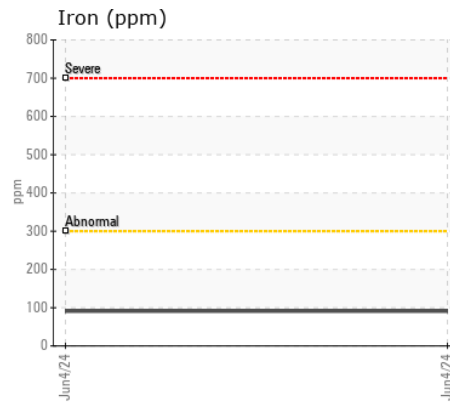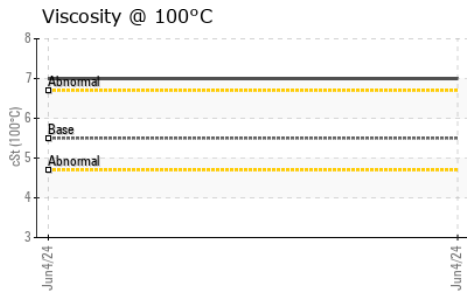

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Sample No. : PC0088689

Lab Number : 02639944

Unique Number : 5789106

Test Package : MOB 1 (Additional Tests: KV100, VI)

Received : 05 Jun 2024

Tested : 06 Jun 2024

Diagnosed : 06 Jun 2024 - Wes Davis

GFL Environmental - 742 - Quebec City Solid Waste

5160 Jean-Talon Pierre-Bertrand Bou

Quebec City, QC

CA G2J 1B7

Contact: Jean Audet

Jaudet@matrec.ca

T: (418)624-0080

F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.