



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
56166
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0935017	WC0844368	WC0857727
Sample Date		Client Info		03 Jun 2024	13 Feb 2024	01 Nov 2023
Machine Age	mls	Client Info		292784	255361	215182
Oil Age	mls	Client Info		37423	40179	39398
Filter Age	mls	Client Info		37423	40179	39398
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>65	17	17	8
Chromium	ppm	ASTM D5185(m)	>5	1	1	<1
Nickel	ppm	ASTM D5185(m)	>3	0	<1	<1
Titanium	ppm	ASTM D5185(m)	>5	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>35	7	7	6
Lead	ppm	ASTM D5185(m)	>10	0	<1	0
Copper	ppm	ASTM D5185(m)	>180	11	11	6
Tin	ppm	ASTM D5185(m)	>8	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>15	4	5	4
Potassium	ppm	ASTM D5185(m)	>20	7	5	7
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.5	0.4	0.1
Nitration	Abs/cm	ASTM D7624*	>20	9.4	9.3	6.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.3	22.4	19.7
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	4	2
Boron	ppm	ASTM D5185(m)	250	4	4	53
Barium	ppm	ASTM D5185(m)	10	0	0	0
Molybdenum	ppm	ASTM D5185(m)	100	64	62	59
Manganese	ppm	ASTM D5185(m)		<1	0	0
Magnesium	ppm	ASTM D5185(m)	450	1018	927	477
Calcium	ppm	ASTM D5185(m)	3000	1153	1251	1658
Phosphorus	ppm	ASTM D5185(m)	1150	1005	1009	987
Zinc	ppm	ASTM D5185(m)	1350	1266	1238	1176
Sulfur	ppm	ASTM D5185(m)	4250	2094	2242	2752
Oxidation	Abs/.1mm	ASTM D7414*	>25	19.2	19.6	15.2
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.5	11.7	11.9

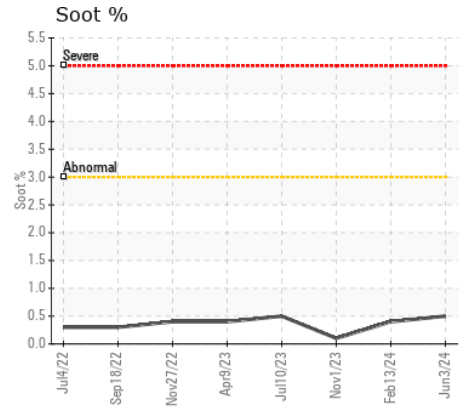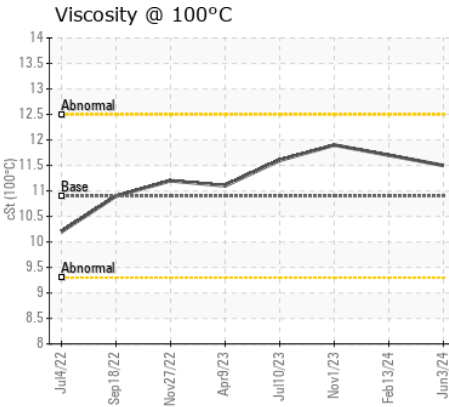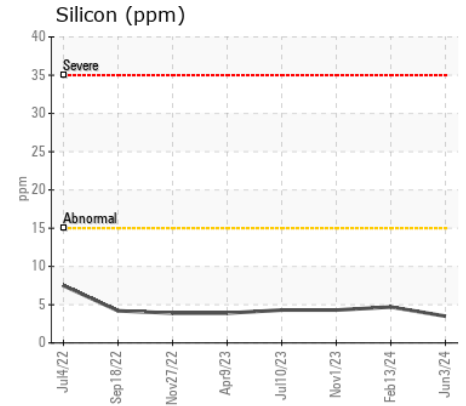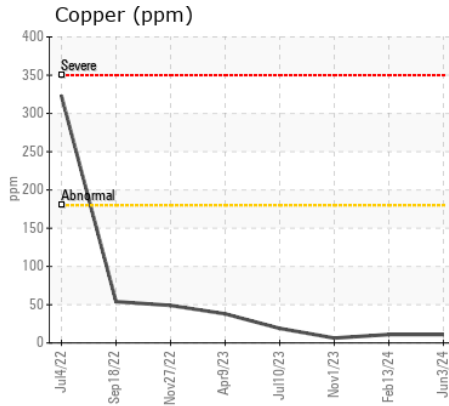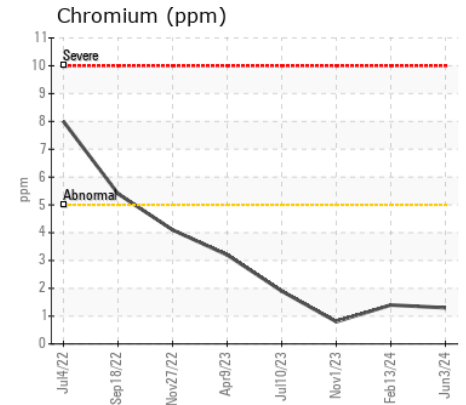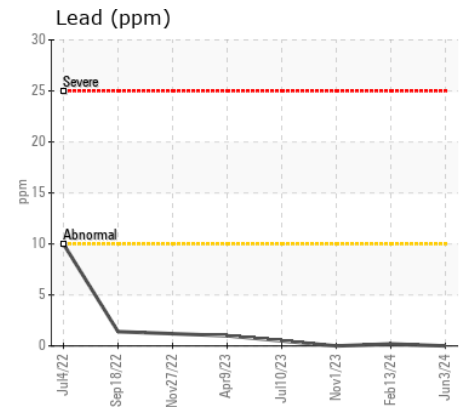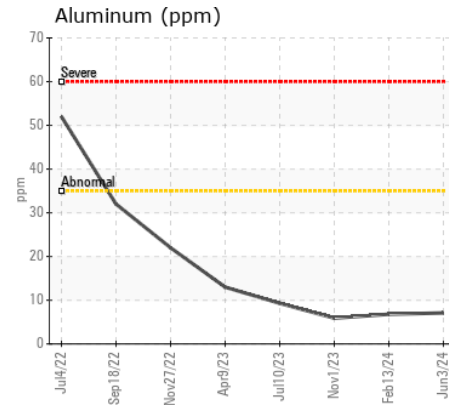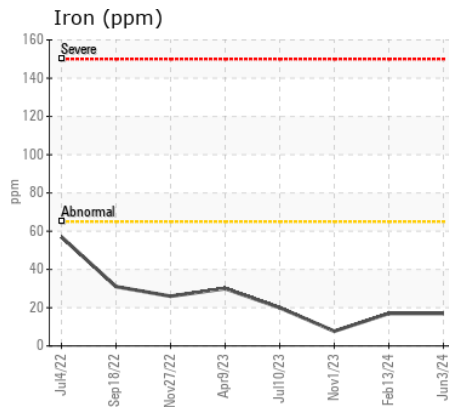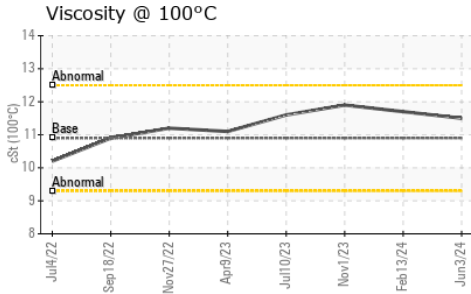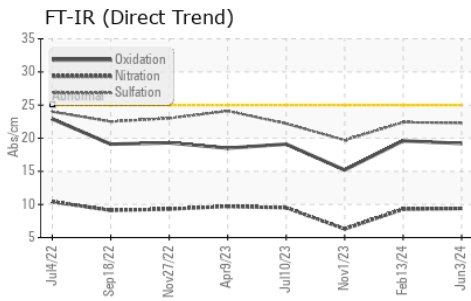

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0935017 **Received** : 06 Jun 2024
Lab Number : 02640069 **Tested** : 06 Jun 2024
Unique Number : 5789231 **Diagnosed** : 06 Jun 2024 - Wes Davis
Test Package : MOB 1

MANITOU LIN TRANSPORT
 75 MUMFORD ROAD
 LIVELY, ON
 CA P3Y 1L1
 Contact: Todd Smith
 tosmith@manitoulintransport.com
 T: (705)562-3302
 F: x:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.