



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
216001
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (12 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0107328	GFL0107321	GFL0079232
Sample Date		Client Info		05 Jun 2024	21 Dec 2023	06 Jul 2023
Machine Age	kms	Client Info		25098	23388	17954
Oil Age	kms	Client Info		0	600	0
Filter Age	kms	Client Info		0	600	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>90	11	20	18
Chromium	ppm	ASTM D5185(m)	>20	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	0	<1	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	3	7	4
Lead	ppm	ASTM D5185(m)	>40	<1	3	5
Copper	ppm	ASTM D5185(m)	>330	19	60	134
Tin	ppm	ASTM D5185(m)	>15	0	1	1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	5	7
Potassium	ppm	ASTM D5185(m)	>20	2	7	2
Fuel		WC Method	>3.0	<1.0	▲ 1.6	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>6	0.2	0.5	0.4
Nitration	Abs/cm	ASTM D7624*	>20	7.9	10.6	10.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.9	20.3	20.1
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	2
Boron	ppm	ASTM D5185(m)	0	3	10	9
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	59	62	60
Manganese	ppm	ASTM D5185(m)	0	<1	<1	1
Magnesium	ppm	ASTM D5185(m)	1010	953	927	957
Calcium	ppm	ASTM D5185(m)	1070	1052	1098	1058
Phosphorus	ppm	ASTM D5185(m)	1150	984	976	1026
Zinc	ppm	ASTM D5185(m)	1270	1166	1140	1163
Sulfur	ppm	ASTM D5185(m)	2060	2557	2643	2507
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.2	18.8	18.2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.6	▲ 12.5	12.8

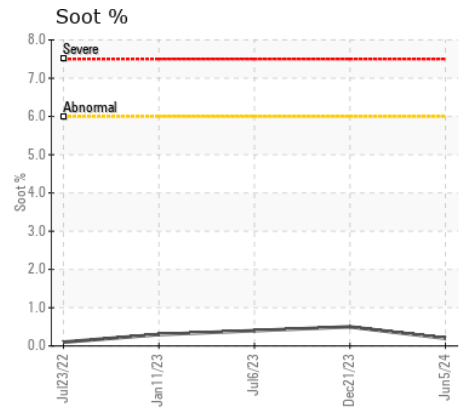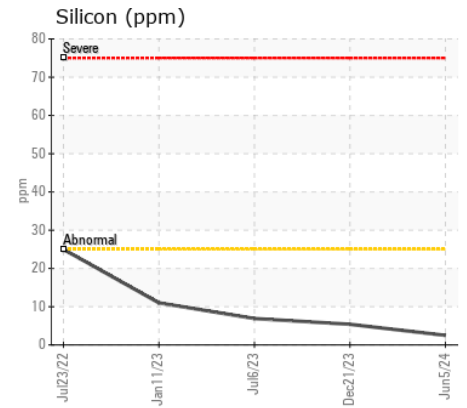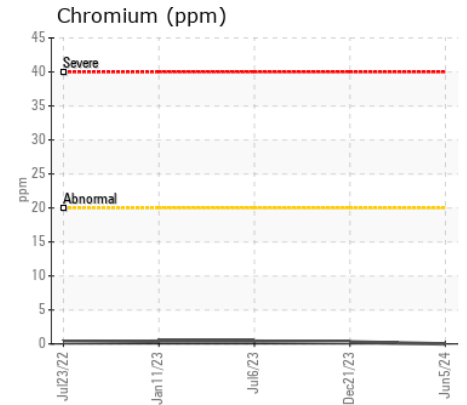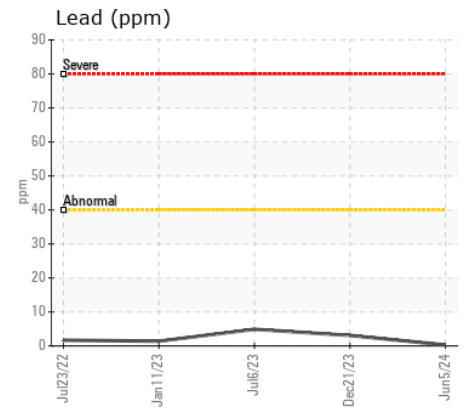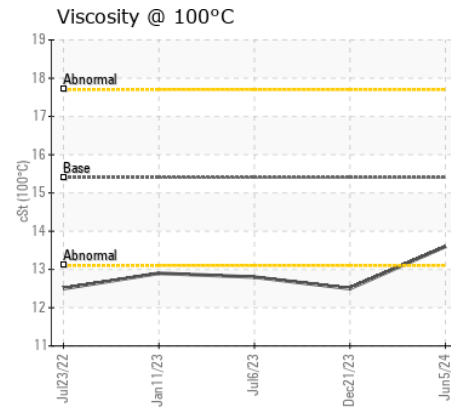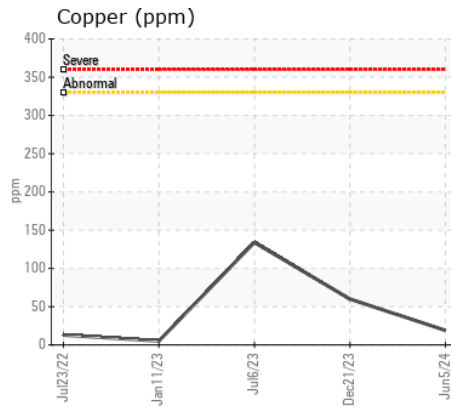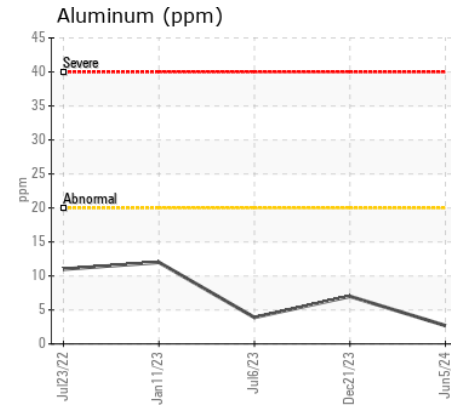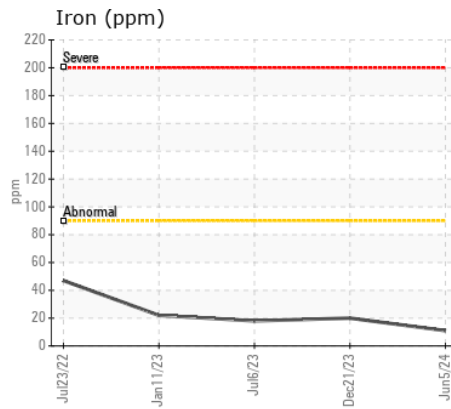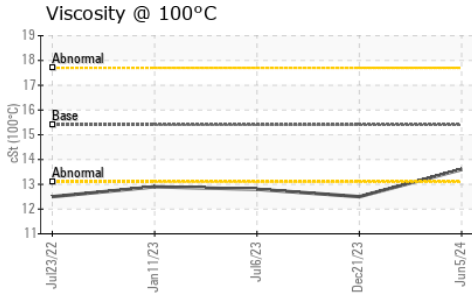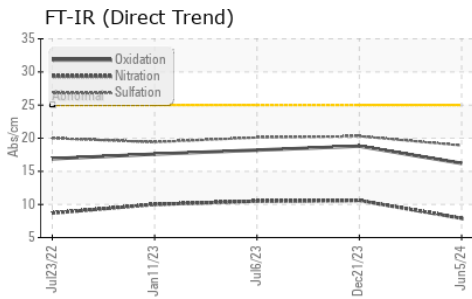

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0107328
Lab Number : 02640082
Unique Number : 5789244
Test Package : MOB 1 (Additional Tests: Visual)

Received : 06 Jun 2024
Tested : 06 Jun 2024
Diagnosed : 06 Jun 2024 - Wes Davis
GFL Environmental - 250 - Sault Ste Marie Hauling + MRF
 86 Sackville Rd,
 Sault Ste. Marie, ON
 CA P6B 4T6
 Contact: Mike Pelletier
 mpelletier@gflenv.com
 T: (705)945-7554
 F: (705)945-7857

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.