



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
INTERNATIONAL 51957
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 10W30 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0935043	WC0915461	WC0854858
Sample Date		Client Info		22 May 2024	16 May 2024	18 Jan 2024
Machine Age	kms	Client Info		287467	345624	281191
Oil Age	kms	Client Info		33046	29960	32108
Filter Age	kms	Client Info		33046	29960	32108
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	8	17	21
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	<1	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	2	4
Lead	ppm	ASTM D5185(m)	>40	0	2	1
Copper	ppm	ASTM D5185(m)	>330	1	<1	2
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	2	4
Potassium	ppm	ASTM D5185(m)	>20	7	1	3
Fuel		WC Method	>2.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.1	0.3	0.4
Nitration	Abs/cm	ASTM D7624*	>20	6.9	8.6	9.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.0	20.7	21.1
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	2	1
Boron	ppm	ASTM D5185(m)	250	124	1	6
Barium	ppm	ASTM D5185(m)	10	0	0	0
Molybdenum	ppm	ASTM D5185(m)	100	11	60	61
Manganese	ppm	ASTM D5185(m)		0	<1	0
Magnesium	ppm	ASTM D5185(m)	450	143	988	976
Calcium	ppm	ASTM D5185(m)	3000	2022	1096	1083
Phosphorus	ppm	ASTM D5185(m)	1150	926	980	1002
Zinc	ppm	ASTM D5185(m)	1350	1109	1222	1208
Sulfur	ppm	ASTM D5185(m)	4250	2756	2336	2463
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.1	17.1	17.4
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	12.0	11.4	11.2

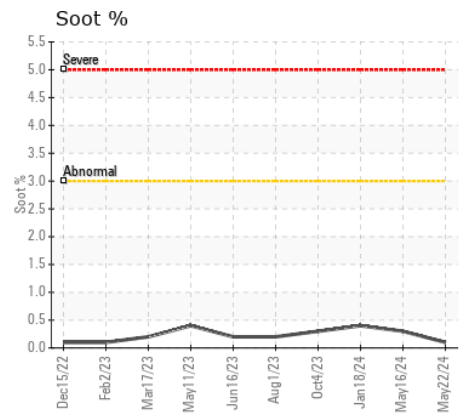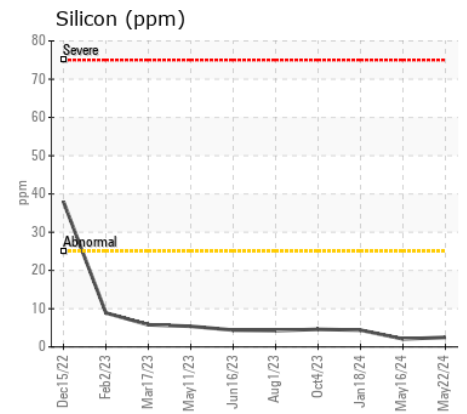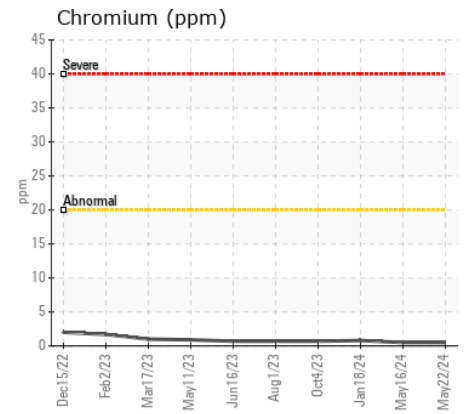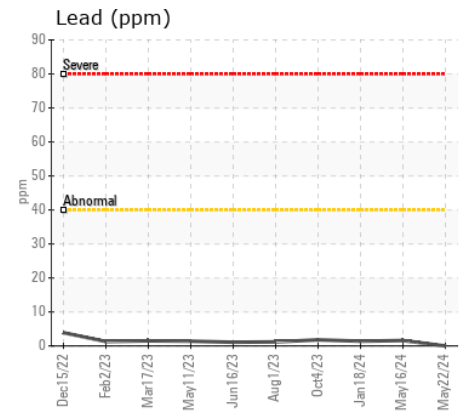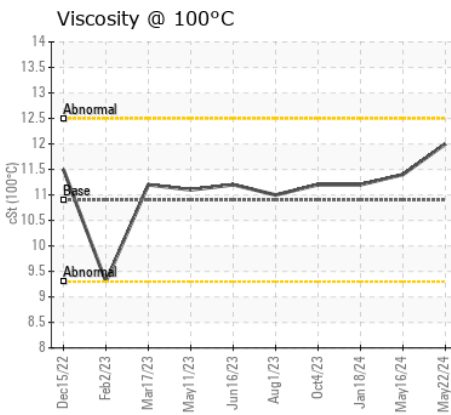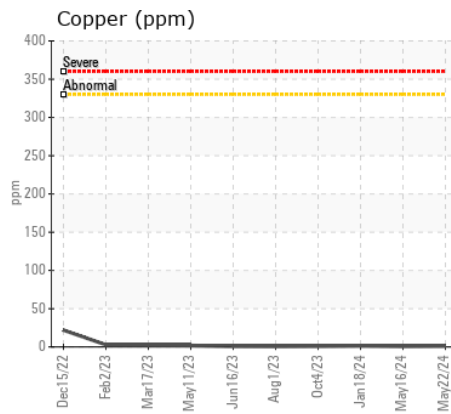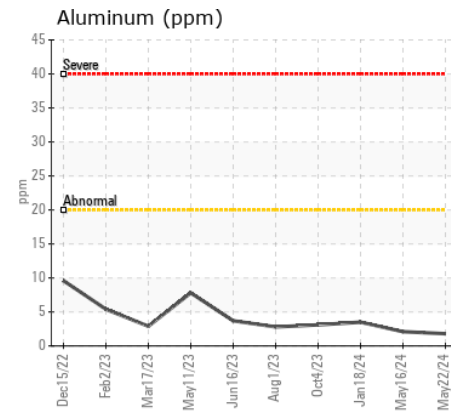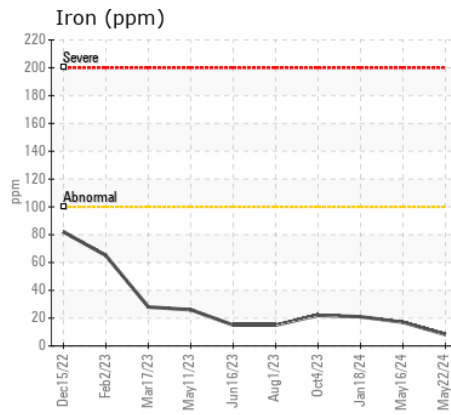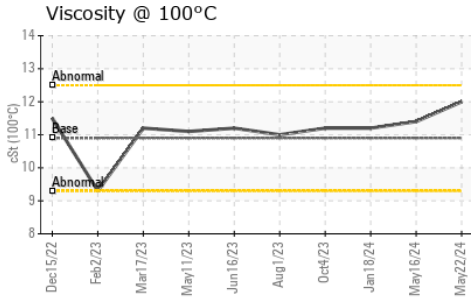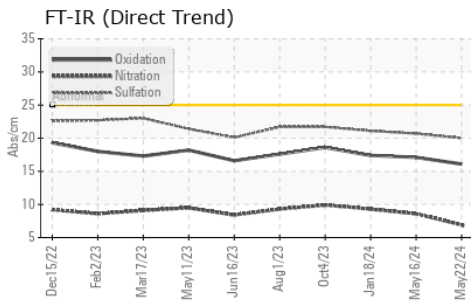

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0935043 **Received** : 06 Jun 2024
Lab Number : 02640152 **Tested** : 06 Jun 2024
Unique Number : 5789314 **Diagnosed** : 06 Jun 2024 - Wes Davis
Test Package : MOB 1

MANITOU LIN TRANSPORT
 75 MUMFORD ROAD
 LIVELY, ON
 CA P3Y 1L1
 Contact: Todd Smith
 tosmith@manitoulintransport.com
 T: (705)562-3302
 F: x:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.