



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH T880 54OLD (S/N 1NKZXPTX2RJ976723)

Component
Diesel Engine

Fluid
TOTAL FINA RUBIA TIR 7900 15W40 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC796264	---	---
Sample Date		Client Info		05 Apr 2024	---	---
Machine Age	kms	Client Info		60233	---	---
Oil Age	kms	Client Info		15000	---	---
Filter Age	kms	Client Info		15000	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	10	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	6	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	2	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	6	---	---
Potassium	ppm	ASTM D5185(m)	>20	12	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0.1	---	---
Nitration	Abs/cm	ASTM D7624*	>20	9.9	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.1	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)		40	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		89	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		38	---	---
Calcium	ppm	ASTM D5185(m)	3290	2419	---	---
Phosphorus	ppm	ASTM D5185(m)	1200	1029	---	---
Zinc	ppm	ASTM D5185(m)	1400	1173	---	---
Sulfur	ppm	ASTM D5185(m)	4000	3166	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.2	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.5	13.3	---	---

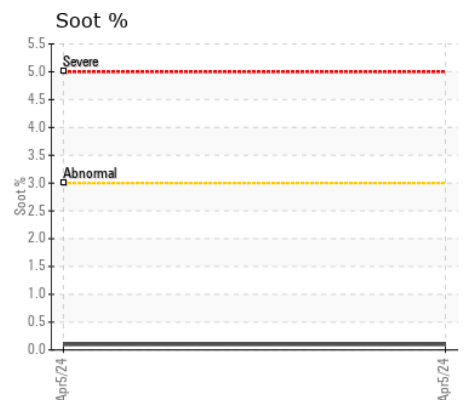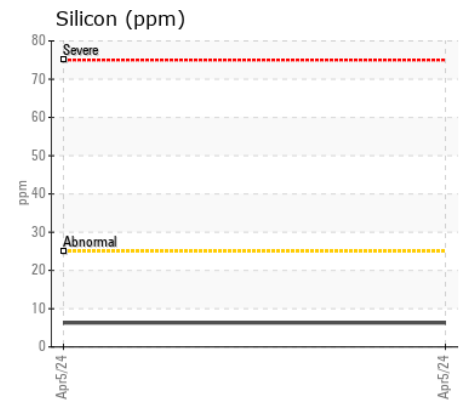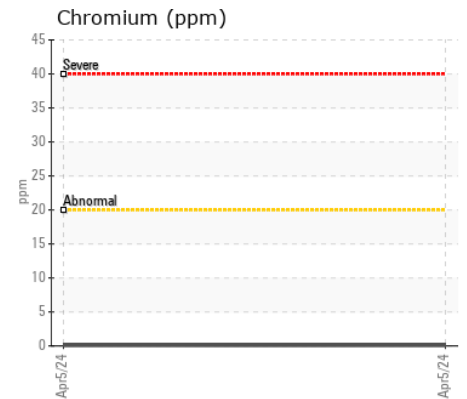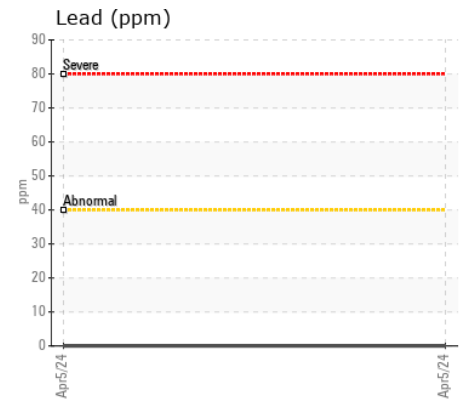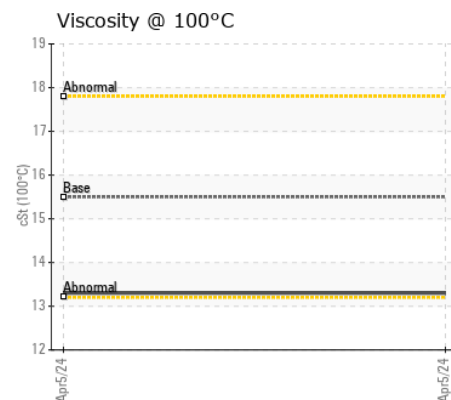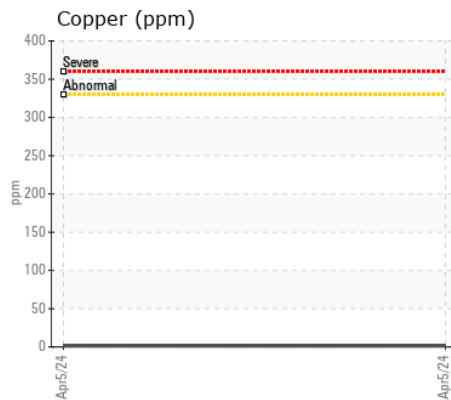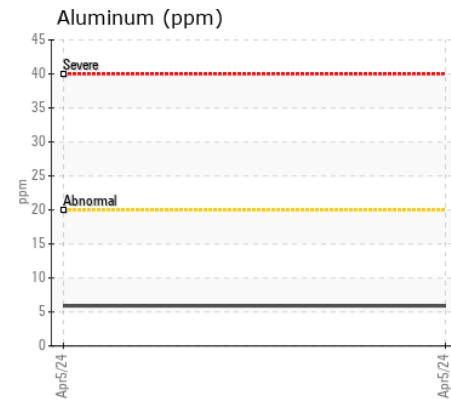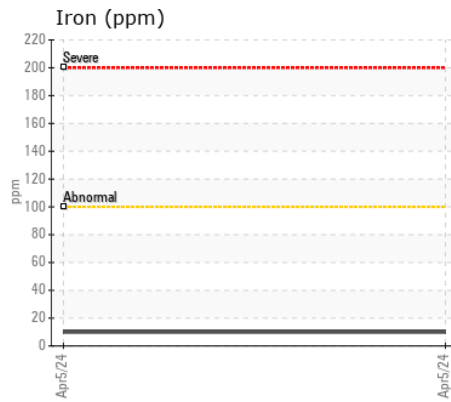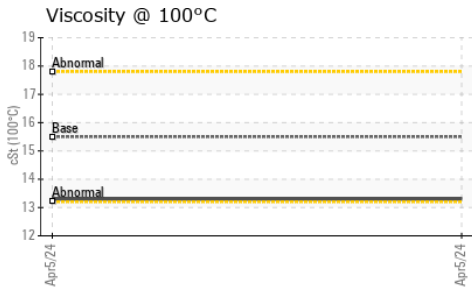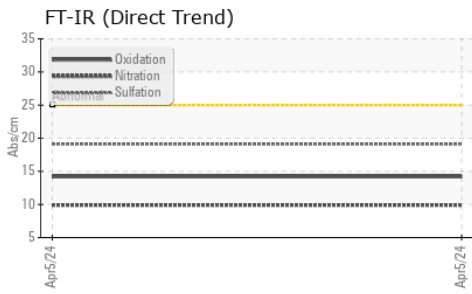

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC796264
Lab Number : 02640164
Unique Number : 5789326
Test Package : MOB 1 (Additional Tests: Visual)

MORVEN CONSTRUCTION LIMITED

P.O. BOX 10
 NAPANEE, ON
 CA K7R 3L4

Contact: Rene Doornekamp
 morven@kos.net
 T: (613)354-9768
 F: (613)354-2302

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.