



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
S0018
Machine Id
828009
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (20 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0116851	GFL0097450	GFL0097455
Sample Date		Client Info		05 Jun 2024	21 Dec 2023	27 Nov 2023
Machine Age	hrs	Client Info		75487	75487	75487
Oil Age	hrs	Client Info		75487	0	5308
Filter Age	hrs	Client Info		75487	0	5308
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>80	10	3	13
Chromium	ppm	ASTM D5185(m)	>5	0	0	<1
Nickel	ppm	ASTM D5185(m)	>2	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>30	2	1	3
Lead	ppm	ASTM D5185(m)	>30	0	0	<1
Copper	ppm	ASTM D5185(m)	>150	1	<1	1
Tin	ppm	ASTM D5185(m)	>5	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	2	3	5
Potassium	ppm	ASTM D5185(m)	>20	1	<1	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.2	0	0.2
Nitration	Abs/cm	ASTM D7624*	>20	8.6	4.9	8.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.7	17.5	19.1
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	1	2
Boron	ppm	ASTM D5185(m)	0	2	3	2
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	60	56	55	56
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	1010	914	900	906
Calcium	ppm	ASTM D5185(m)	1070	976	968	1009
Phosphorus	ppm	ASTM D5185(m)	1150	923	958	936
Zinc	ppm	ASTM D5185(m)	1270	1125	1103	1155
Sulfur	ppm	ASTM D5185(m)	2060	2355	2616	2362
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.6	13.1	15.8
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.6	14.0	13.2

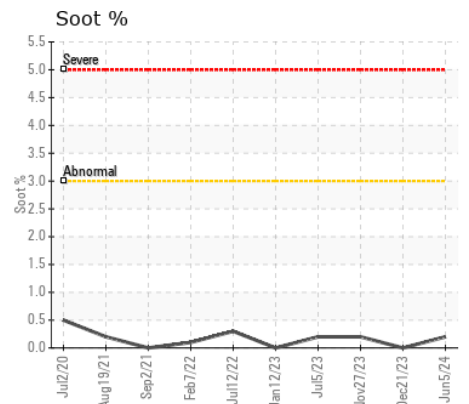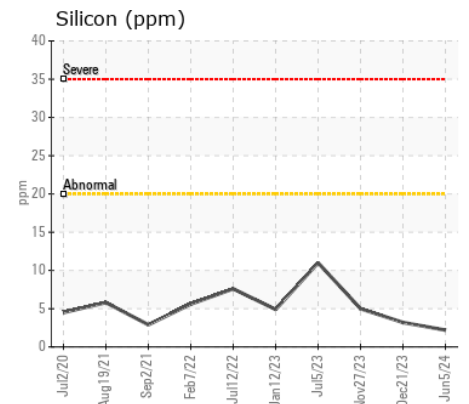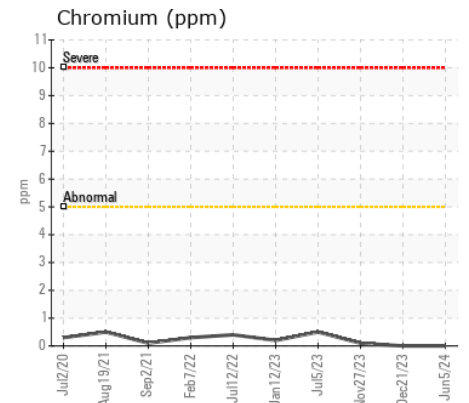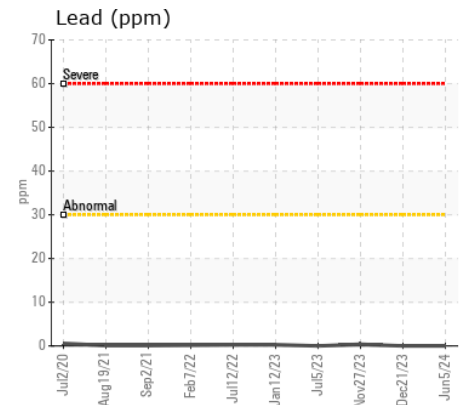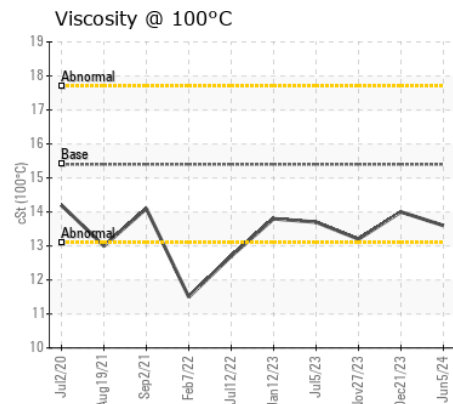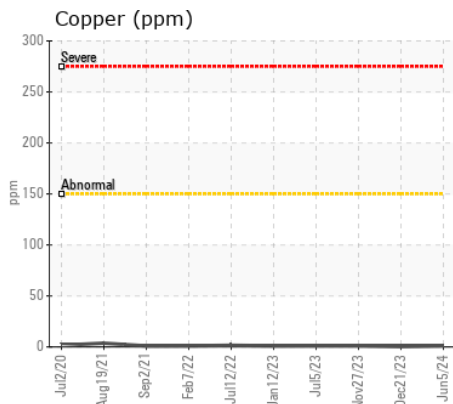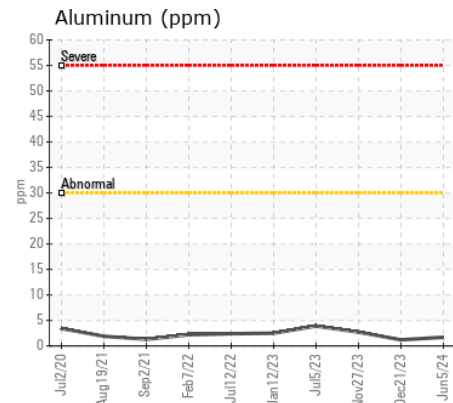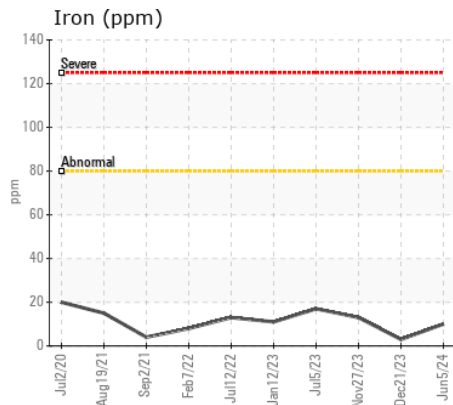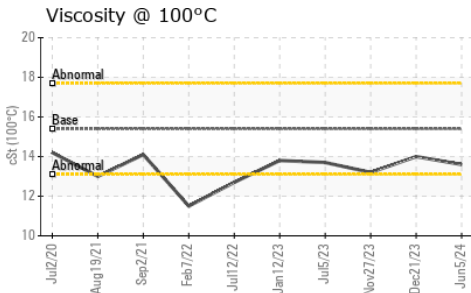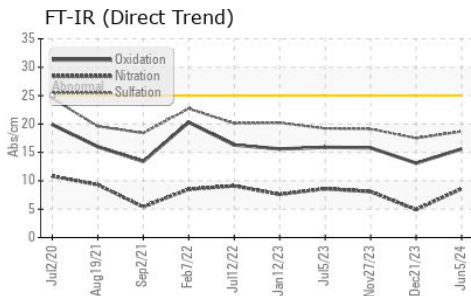

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0116851
Lab Number : 02640404
Unique Number : 5789566
Test Package : MOB 1
Received : 07 Jun 2024
Tested : 07 Jun 2024
Diagnosed : 07 Jun 2024 - Wes Davis

GFL Environmental - 221 - Windsor
 905 Tecumseh Road W
 Windsor, ON
 CA N8W 4J5
 Contact: Pamela-Jean Butler
 pamelajeane.butler@gflenv.com
 T: (519)948-8126
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.