



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

operations

Machine Id

KUBOTA V3800-T K1912 (S/N 2LC1912)

Component

Diesel Engine

Fluid

MOBIL DELVAC 1 5W40 (15 LTR)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0894240	WC0894253	---
Sample Date		Client Info		12 May 2024	03 Feb 2024	---
Machine Age	hrs	Client Info		16910	15680	---
Oil Age	hrs	Client Info		735	390	---
Filter Age	hrs	Client Info		180	390	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	MARGINAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	3	4	---
Chromium	ppm	ASTM D5185(m)	>20	0	0	---
Nickel	ppm	ASTM D5185(m)	>4	0	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>3	0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	1	---
Lead	ppm	ASTM D5185(m)	>40	0	0	---
Copper	ppm	ASTM D5185(m)	>330	<1	<1	---
Tin	ppm	ASTM D5185(m)	>15	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	3	---
Potassium	ppm	ASTM D5185(m)	>20	0	<1	---
Fuel		WC Method	>5	<1.0	▲ 2.2	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	ASTM D7844*	>3	0	0.1	---
Nitration	Abs/cm	ASTM D7624*	>20	9.3	7.6	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.3	21.0	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		3	1	---
Boron	ppm	ASTM D5185(m)	291	1	2	---
Barium	ppm	ASTM D5185(m)	0.0	0	0	---
Molybdenum	ppm	ASTM D5185(m)	8.0	59	59	---
Manganese	ppm	ASTM D5185(m)		0	0	---
Magnesium	ppm	ASTM D5185(m)	624	907	967	---
Calcium	ppm	ASTM D5185(m)	2158	1011	1035	---
Phosphorus	ppm	ASTM D5185(m)	1132	975	1001	---
Zinc	ppm	ASTM D5185(m)	1300	1152	1166	---
Sulfur	ppm	ASTM D5185(m)	3616	2490	2756	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.1	17.8	---
Base Number (BN)	mg KOH/g	ASTM D2896*	11.0	9.22	10.13	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	13.1	12.7	---

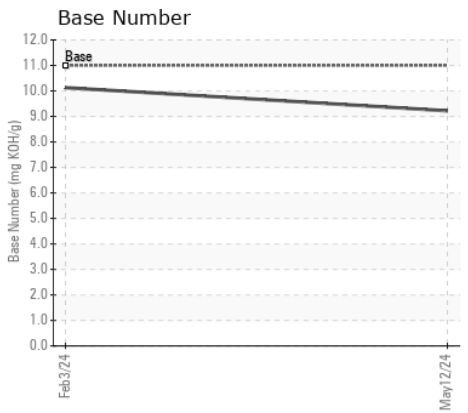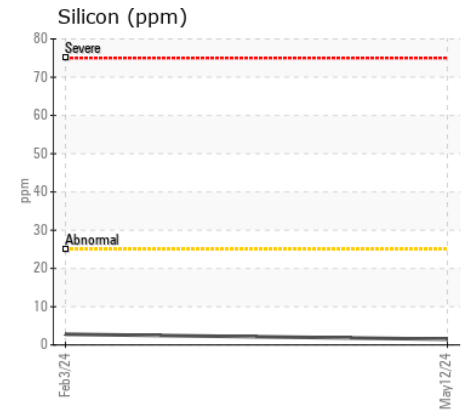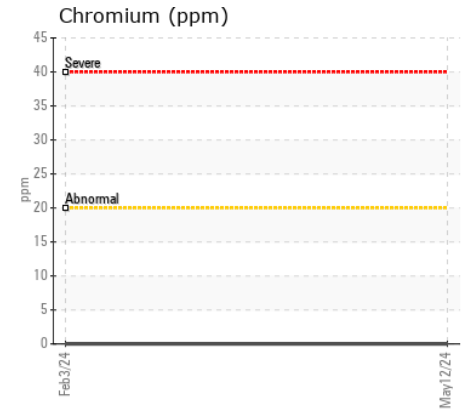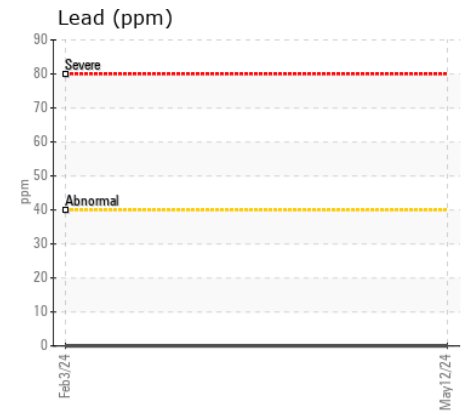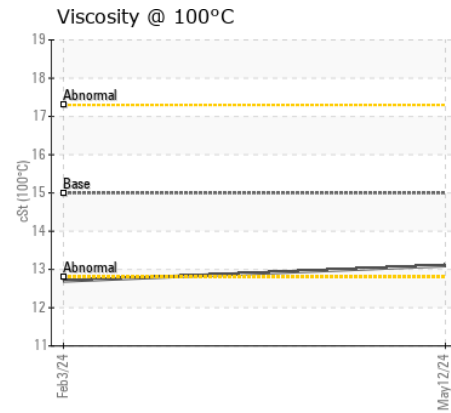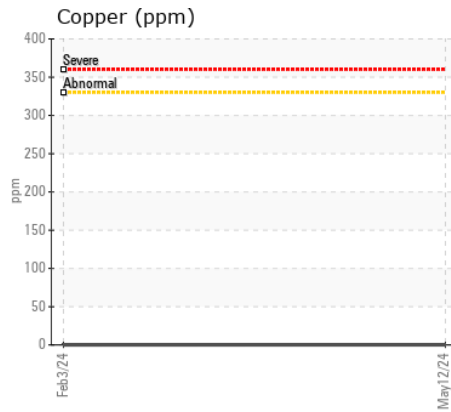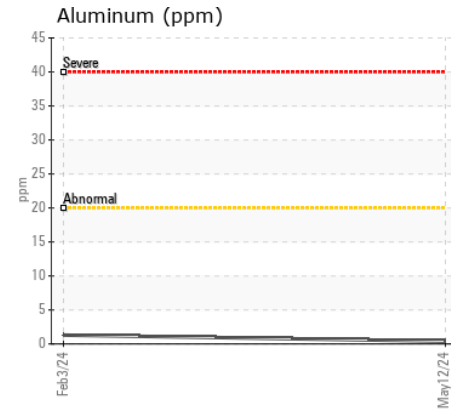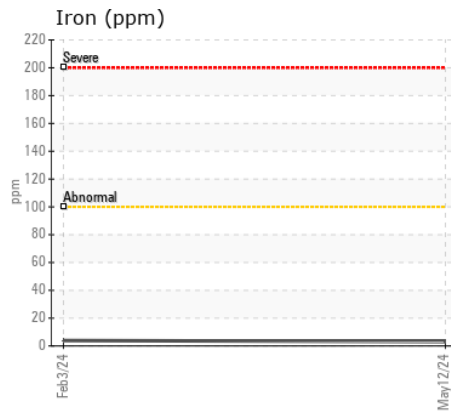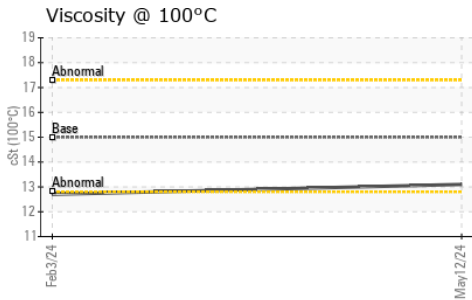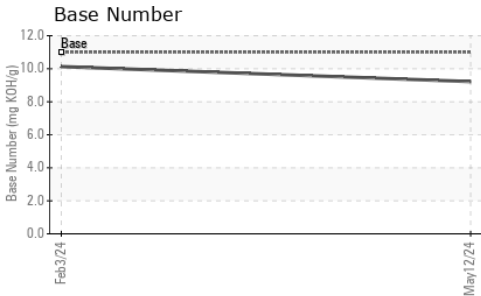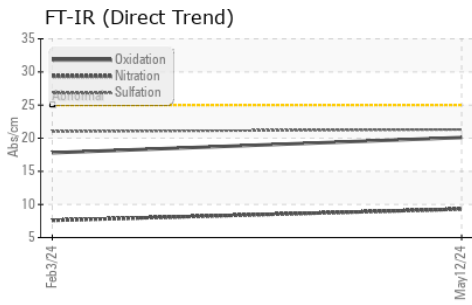

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0894240 **Received** : 07 Jun 2024
Lab Number : 02640415 **Tested** : 10 Jun 2024
Unique Number : 5789577 **Diagnosed** : 10 Jun 2024 - Kevin Marson
Test Package : MOB 2

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Mowi Canada West
 7200 Coho Road
 Port Hardy, BC
 CA V0N 2P0
 Contact: Brian Dalton
 brian.dalton@mowi.com

T:
F: