



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**Bell Island**  
Machine Id  
**KUBOTA V3800-T K1903 (S/N 2LE1903)**  
Component  
**Diesel Engine**  
Fluid  
**MOBIL 15W40 (15 LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0894261	---	---
Sample Date		Client Info		15 May 2024	---	---
Machine Age	hrs	Client Info		10010	---	---
Oil Age	hrs	Client Info		200	---	---
Filter Age	hrs	Client Info		200	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	1	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>4	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	<1	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

**CONTAMINATION**












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	7	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	6.6	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.4	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)	>118	3	---	---
Boron	ppm	ASTM D5185(m)		2	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		53	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		824	---	---
Calcium	ppm	ASTM D5185(m)		1170	---	---
Phosphorus	ppm	ASTM D5185(m)		974	---	---
Zinc	ppm	ASTM D5185(m)		1137	---	---
Sulfur	ppm	ASTM D5185(m)		2659	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*		9.31	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		12.8	---	---

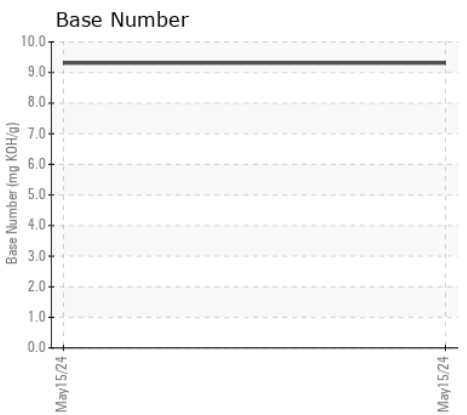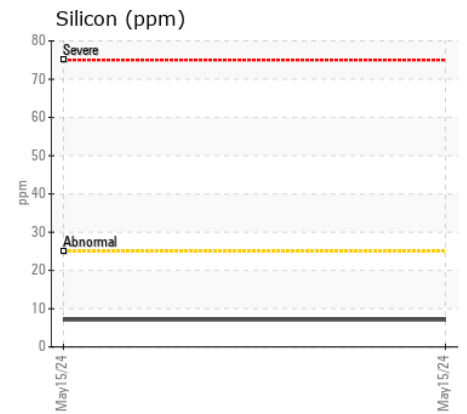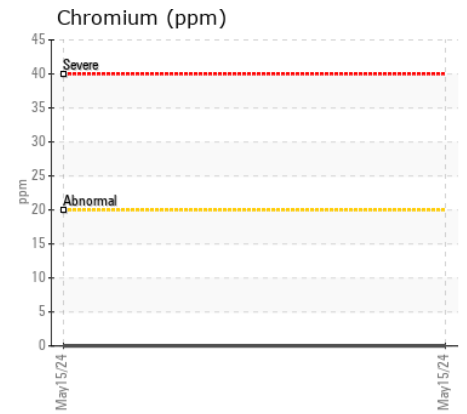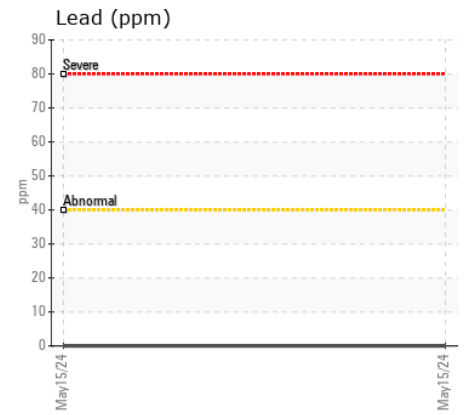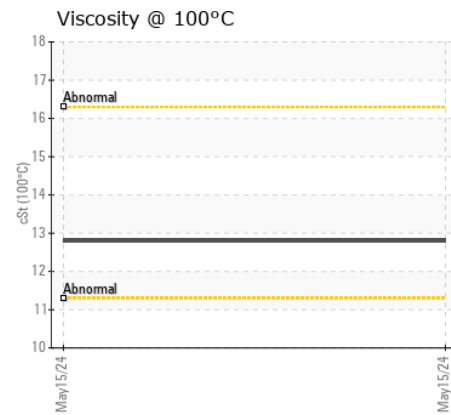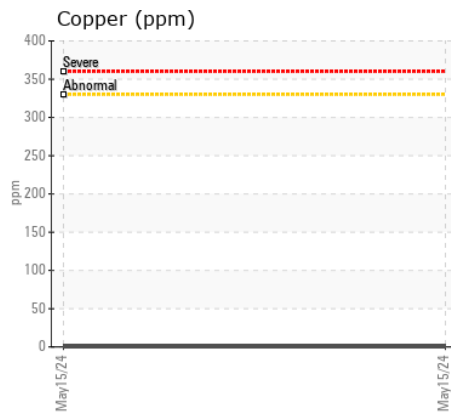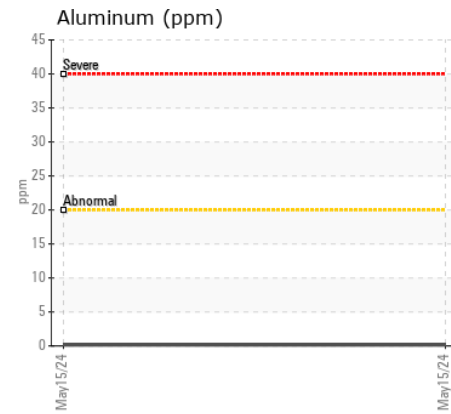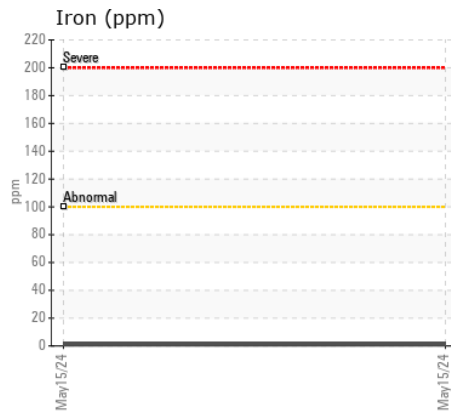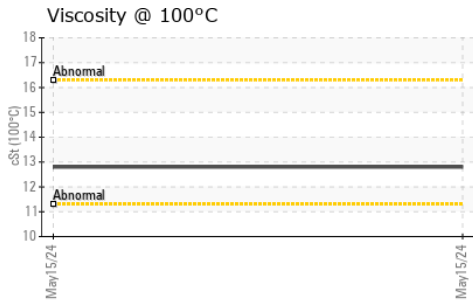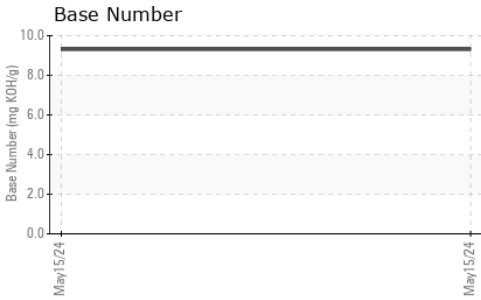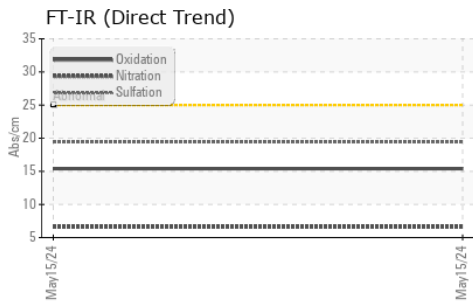

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0894261 **Received** : 07 Jun 2024  
**Lab Number** : 02640418 **Tested** : 10 Jun 2024  
**Unique Number** : 5789580 **Diagnosed** : 10 Jun 2024 - Kevin Marson  
**Test Package** : MOB 2

**Mowi Canada West**  
 7200 Coho Road  
 Port Hardy, BC  
 CA V0N 2P0  
 Contact: Brian Dalton  
 brian.dalton@mowi.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: