



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
ghi.ya
Machine Id
KUBOTA V3800-T K2999 (S/N 2KS2999)
Component
Diesel Engine
Fluid
MOBIL 15W40 (15 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0894242	WC0894278	WC0894273
Sample Date		Client Info		13 May 2024	17 Mar 2024	06 Feb 2024
Machine Age	hrs	Client Info		14590	13920	13400
Oil Age	hrs	Client Info		670	520	450
Filter Age	hrs	Client Info		165	170	450
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	7	7	6
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>4	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<1	2	1
Lead	ppm	ASTM D5185(m)	>40	0	0	<1
Copper	ppm	ASTM D5185(m)	>330	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	1	1	2
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.2	0.2	0.1
Nitration	Abs/cm	ASTM D7624*	>20	8.5	8.6	6.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.6	18.3	20.2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)	>118	5	2	<1
Boron	ppm	ASTM D5185(m)		47	22	1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		25	85	61
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		26	136	1009
Calcium	ppm	ASTM D5185(m)		1976	1939	1071
Phosphorus	ppm	ASTM D5185(m)		933	960	1028
Zinc	ppm	ASTM D5185(m)		1116	1157	1193
Sulfur	ppm	ASTM D5185(m)		2845	2930	2811
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.5	14.0	15.7
Base Number (BN)	mg KOH/g	ASTM D2896*		8.24	9.97	10.39
Visc @ 100°C	cSt	ASTM D7279(m)		13.9	13.8	13.1

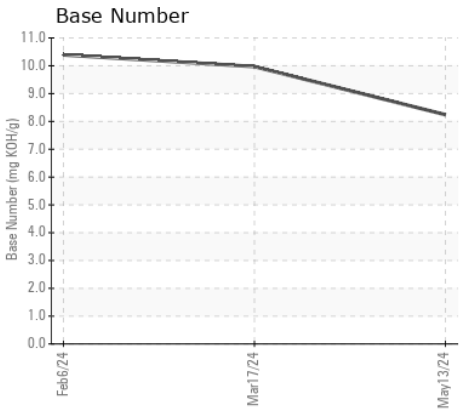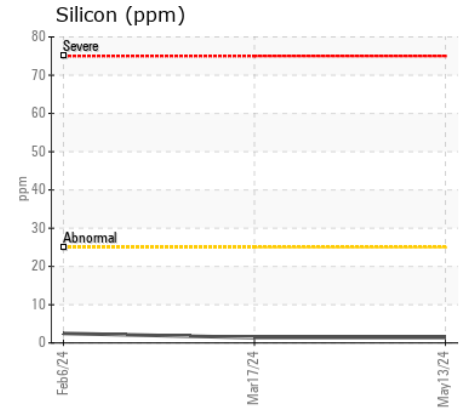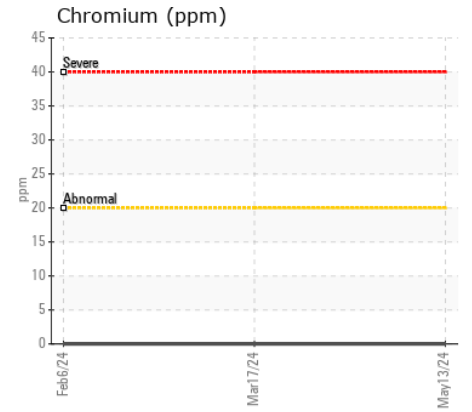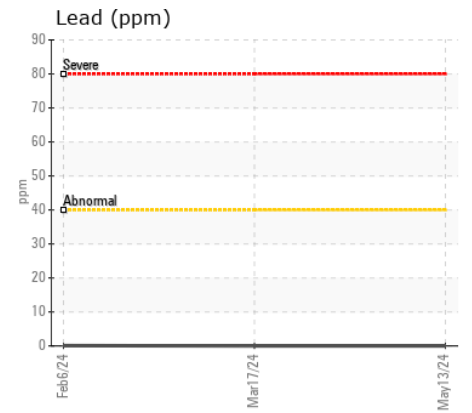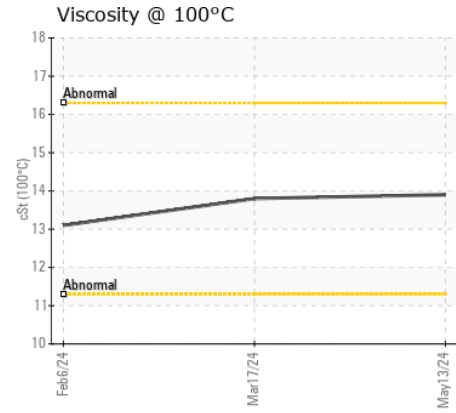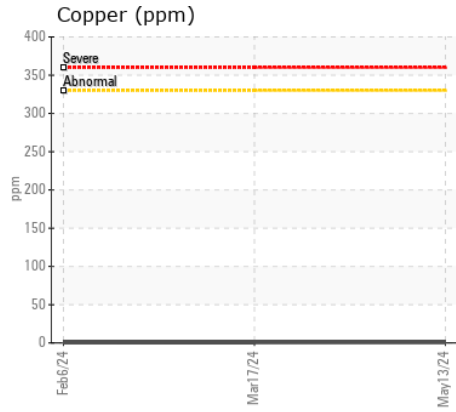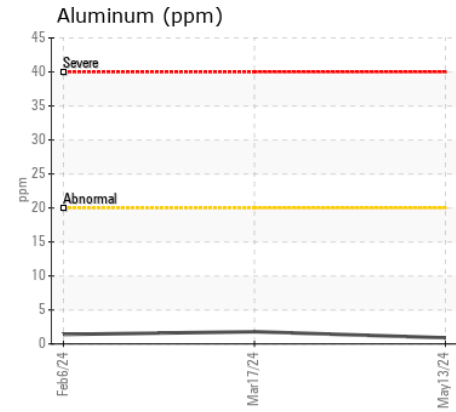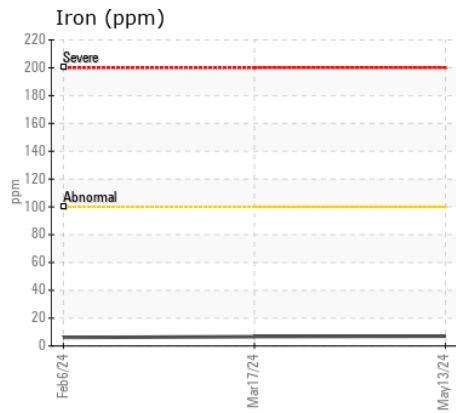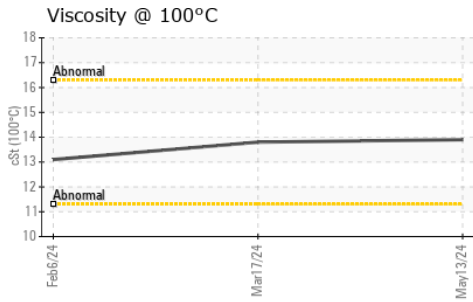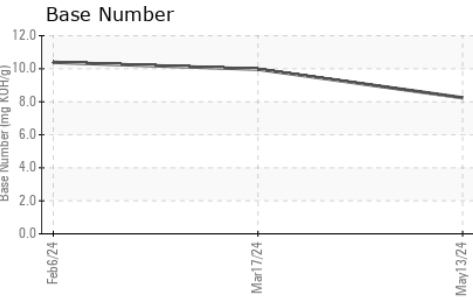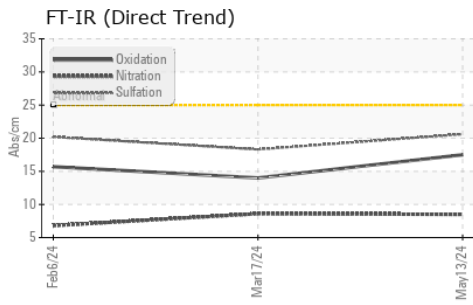

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0894242 **Received** : 07 Jun 2024
Lab Number : 02640426 **Tested** : 10 Jun 2024
Unique Number : 5789588 **Diagnosed** : 10 Jun 2024 - Wes Davis
Test Package : MOB 2

Mowi Canada West
 7200 Coho Road
 Port Hardy, BC
 CA V0N 2P0
 Contact: Brian Dalton
 brian.dalton@mowi.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: