



POWER SYSTEMS
SYSTÈMES DE PUISSANCE

OIL ANALYSIS REPORT

WEAR	SEVERE
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[307829]

Machine Id

FREIGHTLINER NO UNIT WA0020825

Component

Diesel Engine

Fluid

SAE 10W30 (--- GAL)

RECOMMENDATION

We advise that you check for visible metal particles in the oil. We advise that you monitor for an abnormal oil pressure drop and noise. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

WEAR

Copper Copper ppm levels are severe. Iron and tin ppm levels are abnormal. Light concentration of visible metal present. Piston, ring and cylinder wear is indicated. Cylinder, crank, or cam shaft wear is indicated. Bearing wear is indicated. Slide bearing wear is indicated.














CONTAMINATION

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

FLUID CONDITION

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WA0020825	---	---
Sample Date		Client Info		06 May 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				SEVERE	---	---
PQ		ASTM D8184*	>65	17	---	---
Iron	ppm	ASTM D5185(m)	>80	▲ 99	---	---
Chromium	ppm	ASTM D5185(m)	>5	2	---	---
Nickel	ppm	ASTM D5185(m)	>2	1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>30	31	---	---
Lead	ppm	ASTM D5185(m)	>30	10	---	---
Copper	ppm	ASTM D5185(m)	>150	▲ 448	---	---
Tin	ppm	ASTM D5185(m)	>5	▲ 7	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	▲ VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>20	4	---	---
Potassium	ppm	ASTM D5185(m)	>20	44	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0.2	---	---
Nitration	Abs/cm	ASTM D7624*	>20	8.9	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.9	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185(m)	>228	3	---	---
Boron	ppm	ASTM D5185(m)		39	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		16	---	---
Manganese	ppm	ASTM D5185(m)		2	---	---
Magnesium	ppm	ASTM D5185(m)		709	---	---
Calcium	ppm	ASTM D5185(m)		1390	---	---
Phosphorus	ppm	ASTM D5185(m)		710	---	---
Zinc	ppm	ASTM D5185(m)		815	---	---
Sulfur	ppm	ASTM D5185(m)		2092	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.3	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	11.0	10.6	---	---

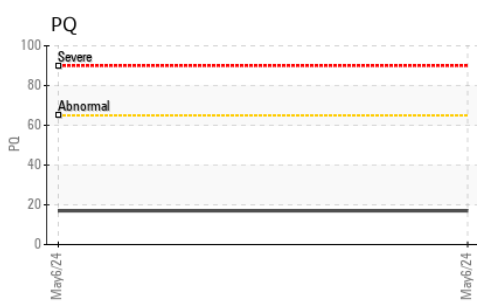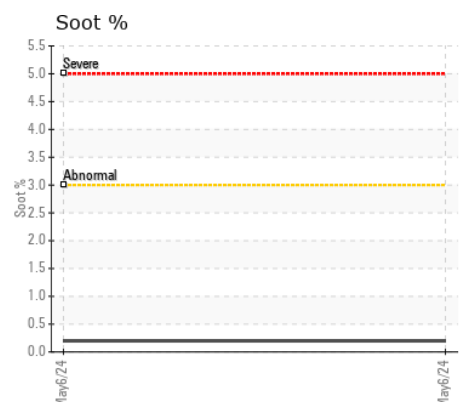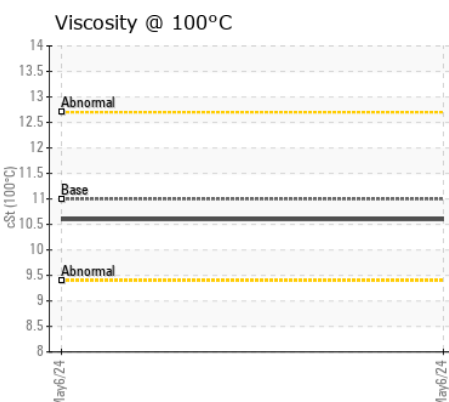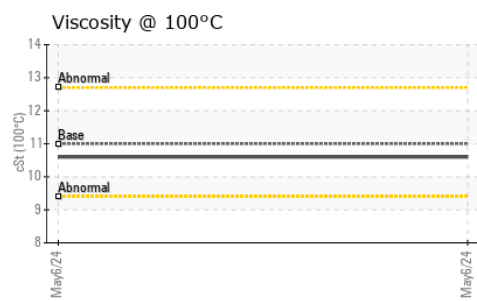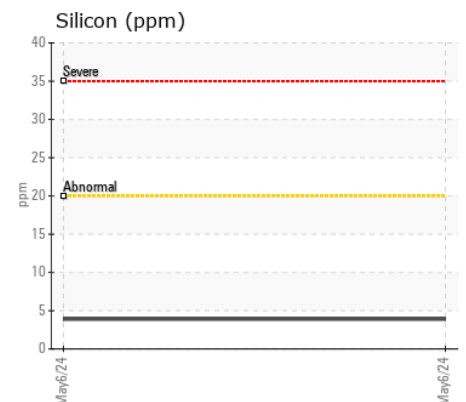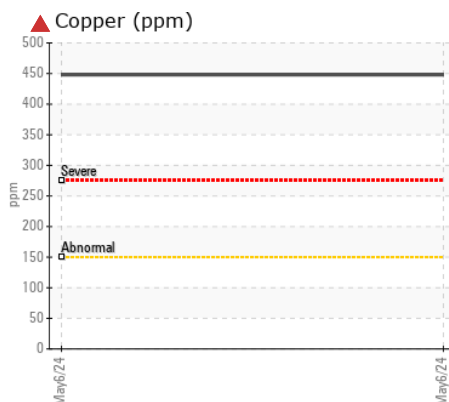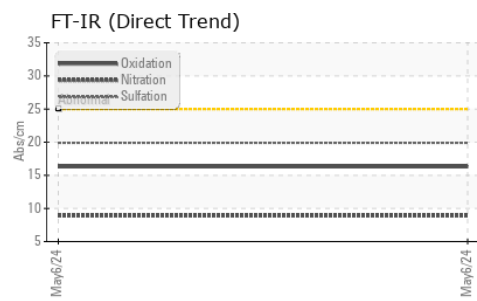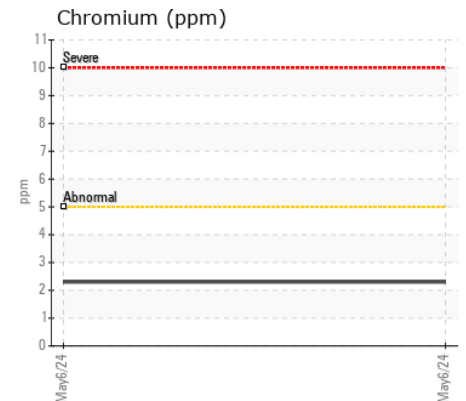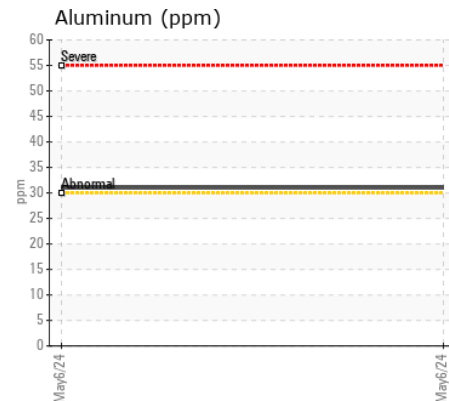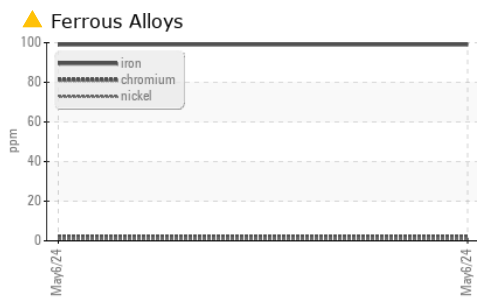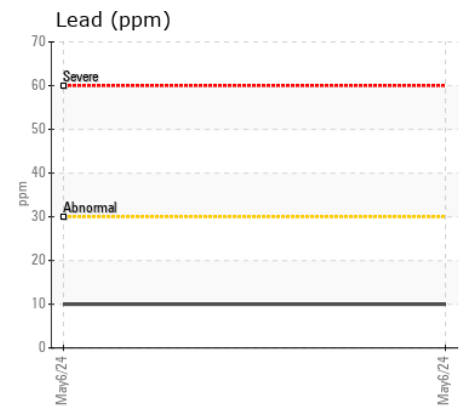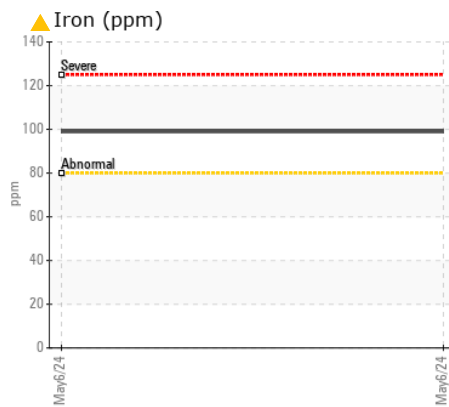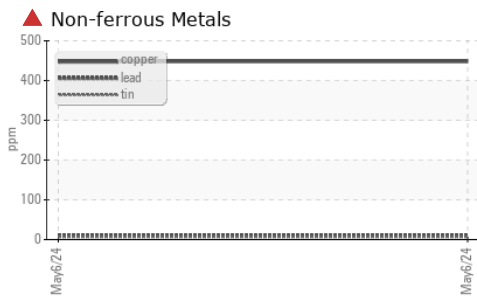

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WA0020825 **Received** : 07 Jun 2024
Lab Number : 02640428 **Tested** : 11 Jun 2024
Unique Number : 5789590 **Diagnosed** : 11 Jun 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: BottomAnalysis, FILTERPATCH, PQ, Visual)

Wajax Power Systems
 70 Raddall Avenue
 Dartmouth, NS
 CA B3B 1T7
 Contact: Danelle Hoffman
 dhoffman@wajax.com
 T: (902)468-6200
 F: (902)468-3325

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.