



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH40M 116354-1215
Component
Hydraulic System
Fluid
LIEBHERR HYDRAULIC HVI (605 LTR)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0289659	LH0261419	LH0277624
Sample Date		Client Info		05 Jun 2024	22 Mar 2024	25 Jan 2024
Machine Age	hrs	Client Info		11257	10603	10071
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>60	25	29	30
Chromium	ppm	ASTM D5185(m)	>40	2	2	2
Nickel	ppm	ASTM D5185(m)	>10	0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>5	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>5	0	0	<1
Copper	ppm	ASTM D5185(m)	>15	2	2	2
Tin	ppm	ASTM D5185(m)	>5	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION









The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>15	1	<1	2
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>20000	3595	12600	35639
Particles >6µm		ASTM D7647	>5000	1038	3454	4556
Particles >14µm		ASTM D7647	>640	103	100	101
Particles >21µm		ASTM D7647	>160	33	13	16
Particles >38µm		ASTM D7647	>40	3	1	2
Particles >71µm		ASTM D7647	>10	0	1	1
Oil Cleanliness		ISO 4406 (c)	>21/19/16	19/17/14	21/19/14	22/19/14
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	VLITE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.
The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	1
Boron	ppm	ASTM D5185(m)	0	14	12	12
Barium	ppm	ASTM D5185(m)	0	<1	<1	<1
Molybdenum	ppm	ASTM D5185(m)	0	6	6	6
Manganese	ppm	ASTM D5185(m)	<1	<1	0	0
Magnesium	ppm	ASTM D5185(m)	7	39	34	35
Calcium	ppm	ASTM D5185(m)	1317	451	482	508
Phosphorus	ppm	ASTM D5185(m)	611	495	508	523
Zinc	ppm	ASTM D5185(m)	696	594	636	615
Sulfur	ppm	ASTM D5185(m)	2574	1620	1756	1903
Visc @ 40°C	cSt	ASTM D7279(m)	46	42.4	42.3	42.0

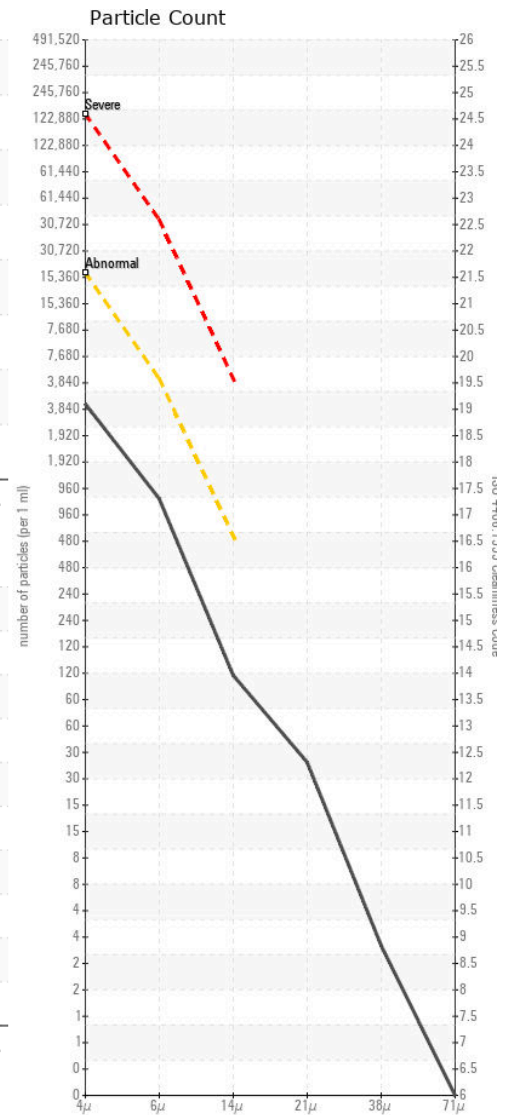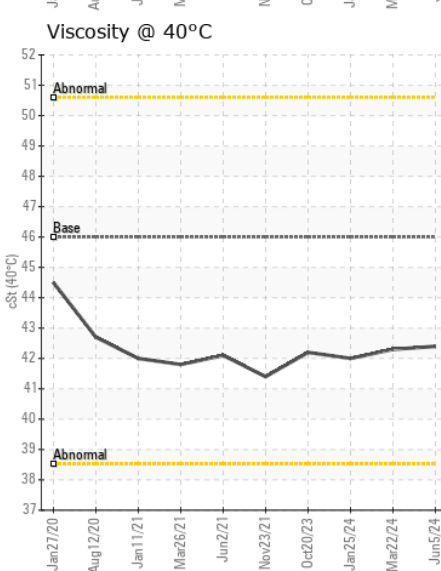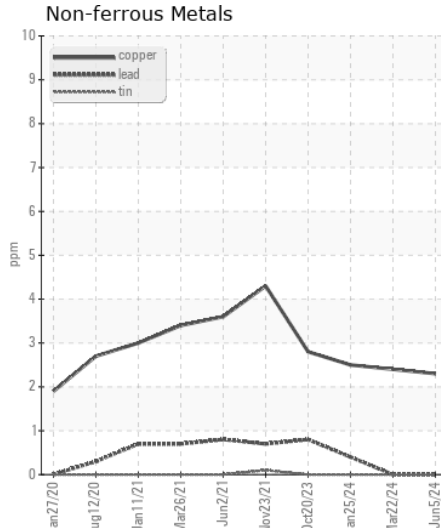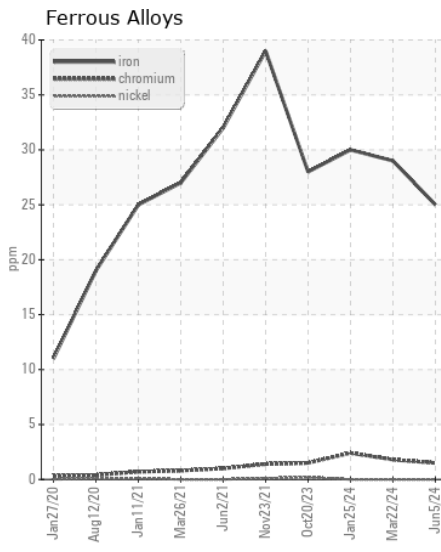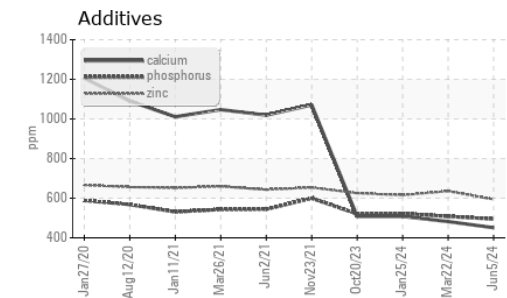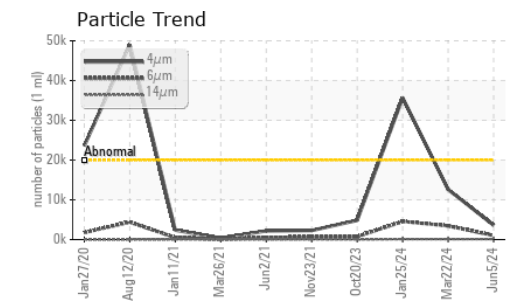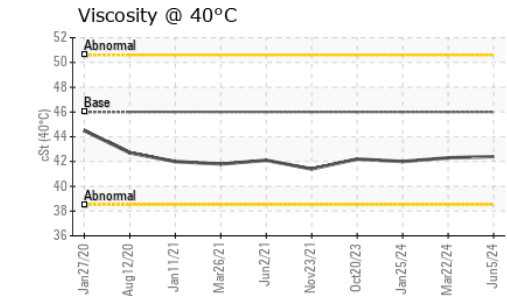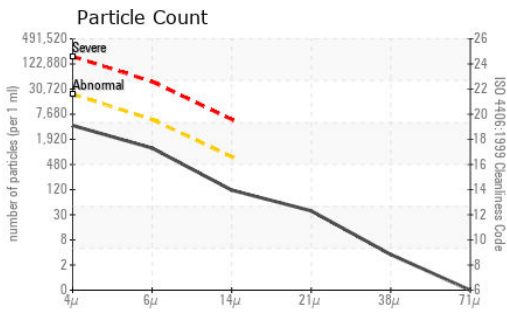

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0289659 **Received** : 07 Jun 2024
Lab Number : 02640558 **Tested** : 07 Jun 2024
Unique Number : 5789720 **Diagnosed** : 10 Jun 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

KIMCO STEEL SALES LTD.
 1325 JOHN COUNTER BLVD
 KINGSTON, ON
 CA K7L 4W1
 Contact: David Roy
 doug@kimcosteel.com
 T: (800)267-0902
 F: (613)548-4653