



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
DAN BLOOMFIELD [406577]
Machine Id
VOLVO L60F 61440
Component
Front Axle
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VC342064	---	---
Sample Date		Client Info		03 Jun 2024	---	---
Machine Age	hrs	Client Info		9654	---	---
Oil Age	hrs	Client Info		9654	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	423	---	---
Chromium	ppm	ASTM D5185(m)	>20	8	---	---
Nickel	ppm	ASTM D5185(m)	>10	2	---	---
Titanium	ppm	ASTM D5185(m)		4	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>30	4	---	---
Lead	ppm	ASTM D5185(m)	>50	1	---	---
Copper	ppm	ASTM D5185(m)	>120	2	---	---
Tin	ppm	ASTM D5185(m)	>20	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	30	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	LIGHT	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	---	---
Boron	ppm	ASTM D5185(m)		104	---	---
Barium	ppm	ASTM D5185(m)		3	---	---
Molybdenum	ppm	ASTM D5185(m)		6	---	---
Manganese	ppm	ASTM D5185(m)		11	---	---
Magnesium	ppm	ASTM D5185(m)		17	---	---
Calcium	ppm	ASTM D5185(m)		3710	---	---
Phosphorus	ppm	ASTM D5185(m)		1273	---	---
Zinc	ppm	ASTM D5185(m)		1511	---	---
Sulfur	ppm	ASTM D5185(m)		9817	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		46.4	---	---

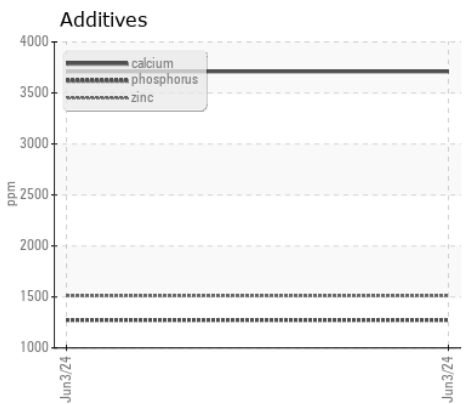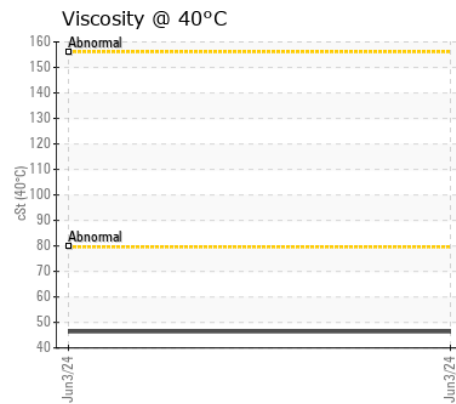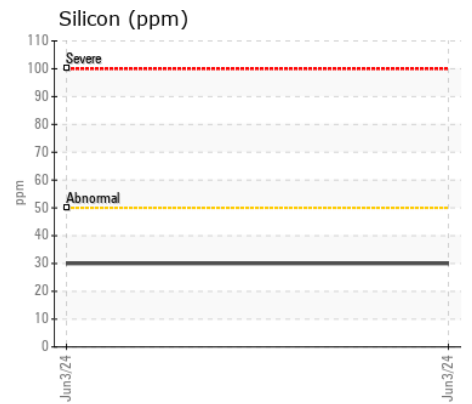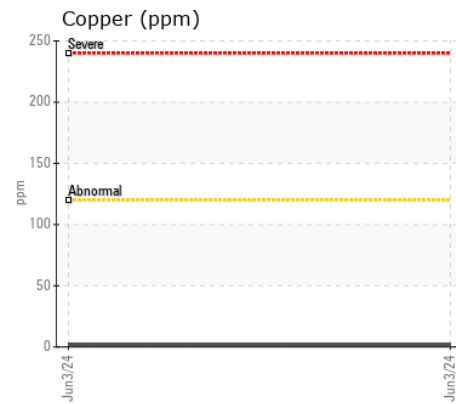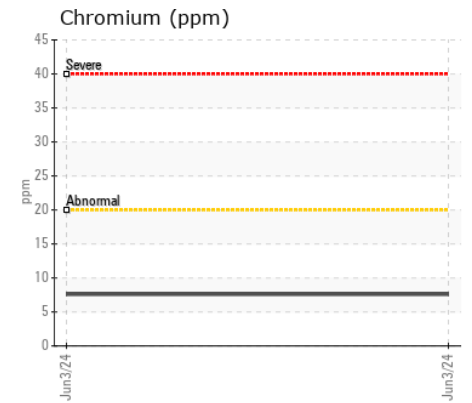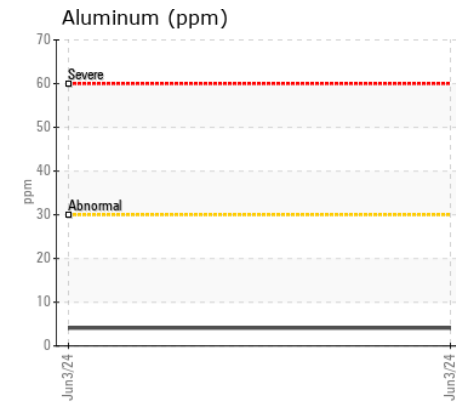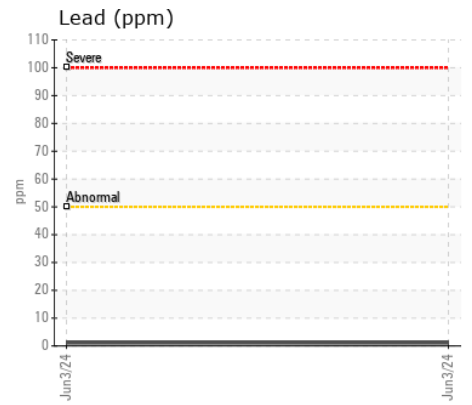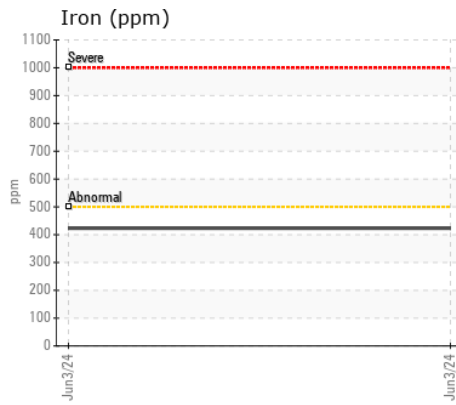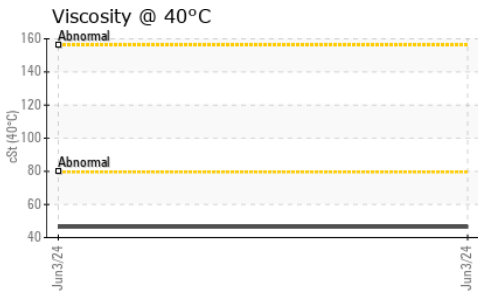

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VC342064
Lab Number : 02640570
Unique Number : 5789732
Test Package : MOB 1
Received : 07 Jun 2024
Tested : 07 Jun 2024
Diagnosed : 10 Jun 2024 - Kevin Marson

STRONGCO EQUIPMENT-GRANDE PRAIRIE
 11301 - 89TH AVE.
 GRANDE PRAIRIE, AB
 CA T8V 7M9
 Contact: Alexander Eil
 aeil@strongco.com
 T: (780)513-3700
 F: (780)513-8822

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.