

### COMPASS DATA CENTERS [154375] F220094297 Component Coolant

# CONVENTIONAL COOLANT (--- GAL)

### RECOMMENDATION

The fluid is suitable for further service. Resample at the next service interval to monitor.

00	DD	ne	ION
60	nn	103	

All metal levels are normal indicating no corrosion in the cooling system.

### CONTAMINANTS

There is no indication of any contamination in the coolant.

-----


## COOLANT CONDITION


The nitrite level is acceptable. The pH level of this fluid is within the acceptable limits.

Т	est	UOM	Method	Limit/Abn	Current	History1	History2
S	Sample Number		Client Info		CU0023310		
S	Sample Date		Client Info		16 May 2024		
N	lachine Age	hrs	Client Info		75		
C	Dil Age	hrs	Client Info		0		
C	Dil Changed		Client Info		Not Changd		
S	Sample Status				NORMAL		
lr -	ron	ppm	ASTM D5185(m)	>15	0		
	Numinum	ppm	ASTM D5185(m)	>10	3		
	Copper	ppm	ASTM D5185(m)	>10	1		
	.ead		ASTM D5185(m)	>10	0		
	in	ppm	ASTM D5185(m)	>10	0		
	Silver	ppm	ASTM D5185(m)	>10	0		
	Zinc	ppm		>10			
		ppm	ASTM D5185(m)	>10	1		
C	Calcium	ppm	ASTM D5185(m)	>100	2		
N	lagnesium	ppm	ASTM D5185(m)	>40	1		
А	ppearance	scalar	Visual*	NORML	NORML		
C	Ddor	scalar	Visual*	NORML	NORML		
С	coolant Appearance		Visual*	Clear	Cloudy		
	Boiling Point	°C	WC Method*		107		
	Specific Gravity	0	ASTM D1298*		1.066		
	H	Scale 0-14	ASTM D1290 ASTM D1287*	9.5	9.84		
. i	litrites		Alcan Test Kit*	1500	9.84 1600		
	Reserve Alkalinity	ppm Scale 0-20	AICan Test Nit	8.5	6.6		
	,	%	ASTM D1121 ASTM D3321*	50	49.0		
	Percentage Glycol	°C					
	Carboxylate	0	ASTM D3321*	-40	-36		
	Silicon	nom	ASTM D5185(m)		48		
	hosphorus	ppm	ASTM D5185(m)		808		
	Boron	ppm	ASTM D5185(m)		232		
	/olybdenum	ppm	ASTM D5185(m)		417		
	Sodium	ppm	ASTM D5185(m)		1310		
		ppm	. ,		4324		
	Potassium	ppm	ASTM D5185(m)	Croose			
C	Coolant Color		Visual*	Green	Other		

Contact/Location: Elisia Johnson - CUMMISGEN Page 1 of 2



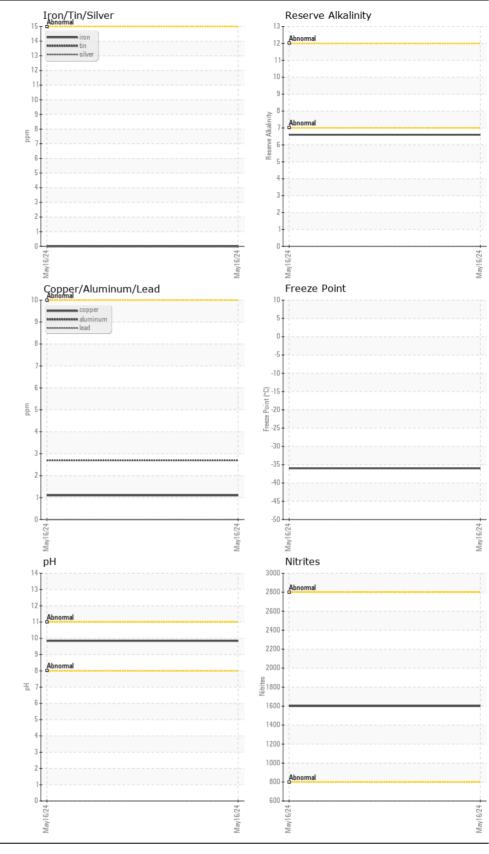

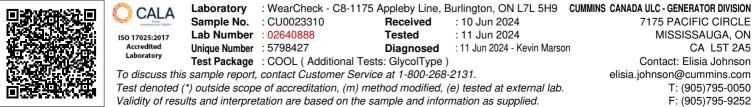

Contact/Location: Elisia Johnson - CUMMISGEN Page 2 of 2