

## EQUINIX [155433] NO UNIT CU0022717 Component Coolant

EXTENDED LIFE COOLANT (--- GAL)

## RECOMMENDATION

The fluid is suitable for further service. Resample at the next service interval to monitor.

00				N
CO	RF	103	SIO S	N

All metal levels are normal indicating no corrosion in the cooling system.

## **CONTAMINANTS**

There is no indication of any contamination in the coolant.


-----


## COOLANT CONDITION


The pH level of this fluid is within the acceptable limits. The reserve alkalinity of this fluid is acceptable.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CU0022717		
Sample Date		Client Info		09 May 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
Iron	ppm	ASTM D5185(m)	>15	0		
Aluminum		ASTM D5185(m)	>10	0		
	ppm			4		
Copper Lead	ppm	ASTM D5185(m)	>10			
	ppm	ASTM D5185(m)	>10	0		
Tin	ppm	ASTM D5185(m)	>10	0		
Silver	ppm	ASTM D5185(m)	>10	<1		
Zinc	ppm	ASTM D5185(m)	>10	2		
Calcium	ppm	ASTM D5185(m)	>100	2		
Magnesium	ppm	ASTM D5185(m)	>40	1		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Coolant Appearance		Visual*	Clear	Clear		
Poiling Point	°C	WC Method*		107		
Boiling Point	C					
Specific Gravity	Coole 0.14	ASTM D1298*	0.0	1.062		
рН	Scale 0-14	ASTM D1287*	9.0	9.58		
Nitrites	ppm	Alcan Test Kit*		440		
Reserve Alkalinity	Scale 0-20	ASTM D1121*	50	2.9		
Percentage Glycol	%	ASTM D3321*	50	45.5		
Freezing Point	°C	ASTM D3321*	-40	-31		
Carboxylate						
Silicon	ppm	ASTM D5185(m)		6		
Phosphorus	ppm	ASTM D5185(m)		12		
Boron	ppm	ASTM D5185(m)		33		
Molybdenum	ppm	ASTM D5185(m)		31		
Sodium	ppm	ASTM D5185(m)		3350		
Potassium	ppm	ASTM D5185(m)		163		
Coolant Color		Visual*	Orange/R	Red		

Contact/Location: Elisia Johnson - CUMMISGEN Page 1 of 2

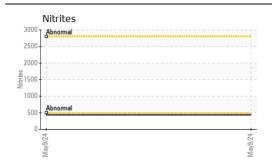

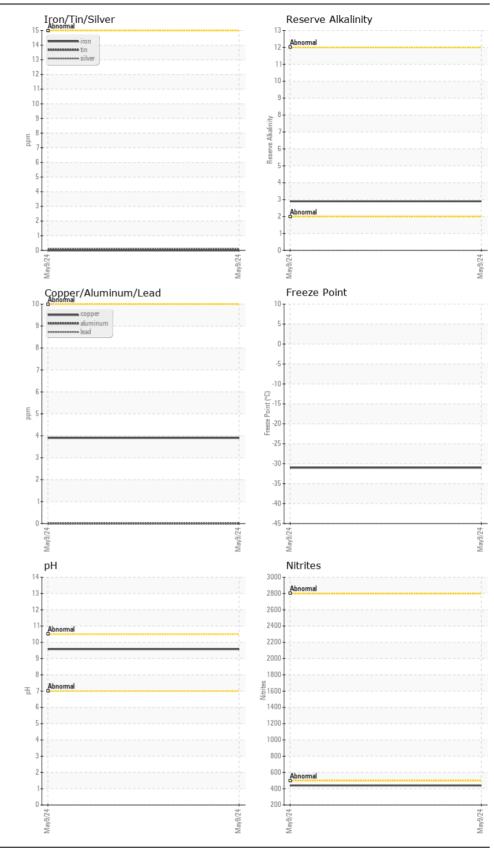

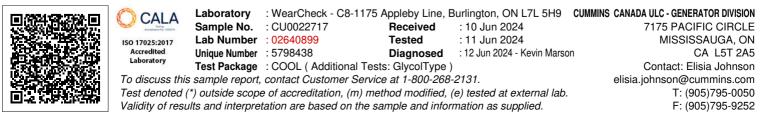

Contact/Location: Elisia Johnson - CUMMISGEN Page 2 of 2