

Machine Id  
**125050**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON XL SYN BLEND 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0117284</b>	GFL0112403	GFL0099601
Sample Date		Client Info		<b>04 Jun 2024</b>	05 Mar 2024	20 Dec 2023
Machine Age	hrs	Client Info		<b>18539</b>	405312	397600
Oil Age	hrs	Client Info		<b>485</b>	0	0
Filter Age	hrs	Client Info		<b>485</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	N/A
Filter Changed		Client Info		<b>Changed</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>29</b>	23	18
Chromium	ppm	ASTM D5185(m)	>20	<b>2</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

**CONTAMINATION**












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>19</b>	3	3
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	1	2
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.8</b>	6.9	6.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.4</b>	19.2	19.3
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		<b>4</b>	3	3
Boron	ppm	ASTM D5185(m)	1	<b>5</b>	3	2
Barium	ppm	ASTM D5185(m)	1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>59</b>	58	57
Manganese	ppm	ASTM D5185(m)	1	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185(m)	1010	<b>964</b>	960	940
Calcium	ppm	ASTM D5185(m)	1070	<b>1076</b>	1096	1118
Phosphorus	ppm	ASTM D5185(m)	1150	<b>978</b>	1016	997
Zinc	ppm	ASTM D5185(m)	1270	<b>1188</b>	1211	1190
Sulfur	ppm	ASTM D5185(m)	2060	<b>2366</b>	2578	2580
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>17.1</b>	15.1	15.0
Base Number (BN)	mg KOH/g	ASTM D2896*	9.6	<b>9.85</b>	10.29	10.42
Visc @ 100°C	cSt	ASTM D7279(m)	15.5	<b>14.2</b>	14.2	14.0

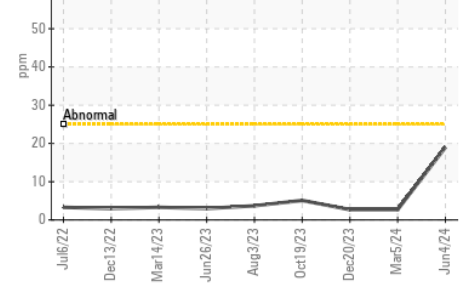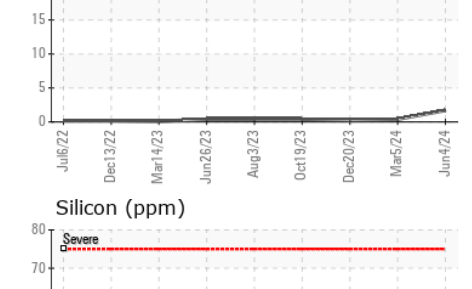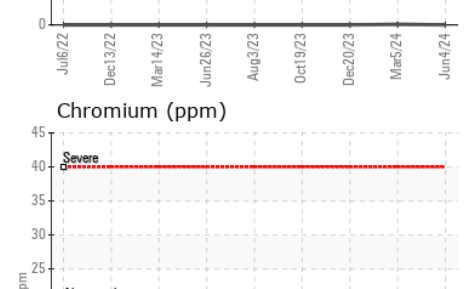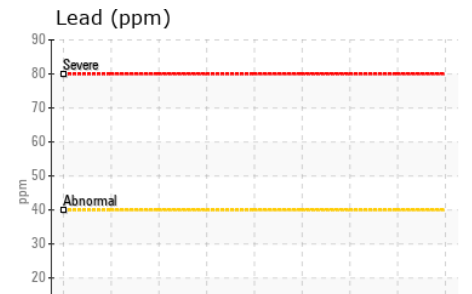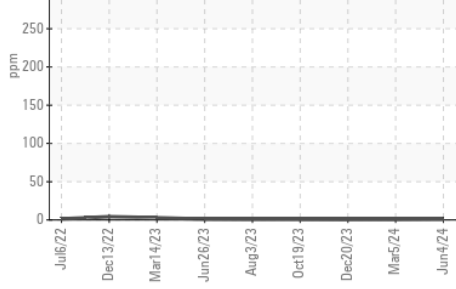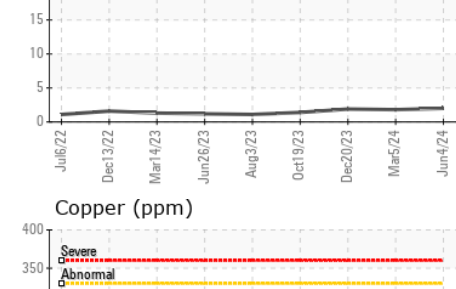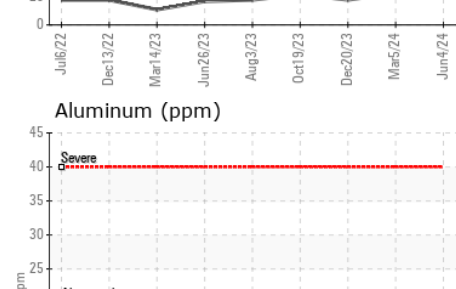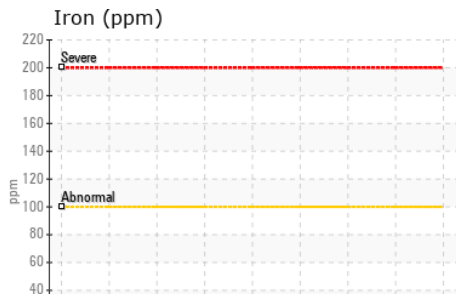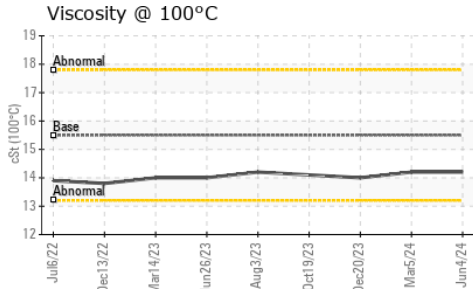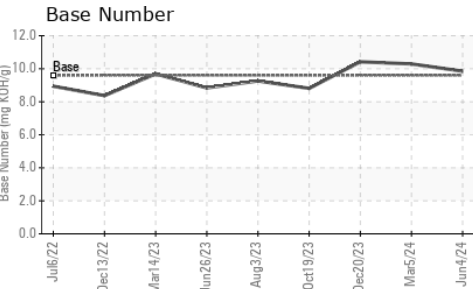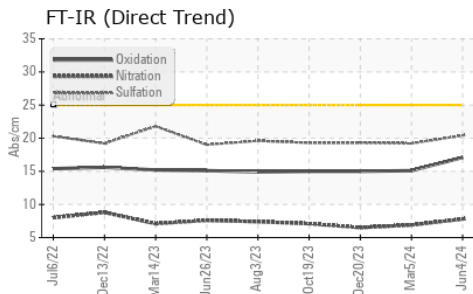

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0117284  
**Lab Number** : 02641068  
**Unique Number** : 5798607  
**Test Package** : MOB 2

**GFL Environmental - 550 - Rocky View County**  
 220 Carmek Blvd  
 Rocky View County, AB  
 CA T1X 1X1  
 Contact: GFL Calgary  
 calgarymaintenance@gflenv.com  
 T: (403)369-6163

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.