



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L586 068511-1761
Component
Hydraulic System
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0291009	LH0281365	LH0274787
Sample Date		Client Info		10 Jun 2024	21 Jan 2024	29 Aug 2023
Machine Age	hrs	Client Info		3246	2595	1877
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>50	17	<1	15
Chromium	ppm	ASTM D5185(m)	>5	<1	0	<1
Nickel	ppm	ASTM D5185(m)	>2	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>5	3	<1	3
Lead	ppm	ASTM D5185(m)	>15	9	0	8
Copper	ppm	ASTM D5185(m)	>10	3	0	3
Tin	ppm	ASTM D5185(m)	>2	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION








The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>15	8	<1	10
Potassium	ppm	ASTM D5185(m)	>20	2	1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>20000	6841	▲ 68088	● 30297
Particles >6µm		ASTM D7647	>5000	349	▲ 20599	4600
Particles >14µm		ASTM D7647	>640	15	● 1018	326
Particles >21µm		ASTM D7647	>160	5	218	90
Particles >38µm		ASTM D7647	>40	2	12	2
Particles >71µm		ASTM D7647	>10	0	2	1
Oil Cleanliness		ISO 4406 (c)	>21/19/16	20/16/11	▲ 23/22/17	● 22/19/16
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	0	2
Boron	ppm	ASTM D5185(m)		<1	0	<1
Barium	ppm	ASTM D5185(m)		<1	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		<1	0	<1
Magnesium	ppm	ASTM D5185(m)		5	<1	6
Calcium	ppm	ASTM D5185(m)		1213	103	1456
Phosphorus	ppm	ASTM D5185(m)		605	647	656
Zinc	ppm	ASTM D5185(m)		721	828	724
Sulfur	ppm	ASTM D5185(m)		3003	1589	3309
Visc @ 40°C	cSt	ASTM D7279(m)		43.0	46.7	43.6

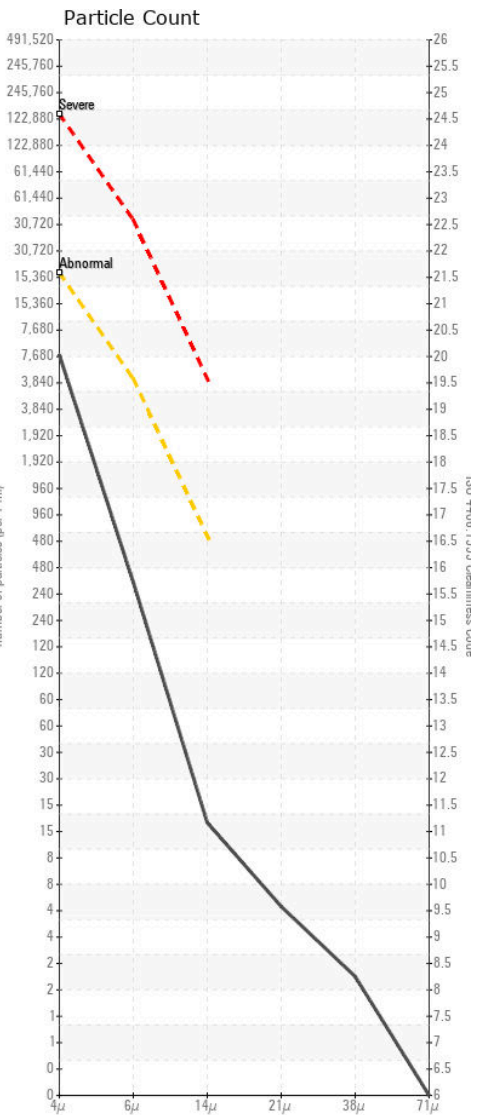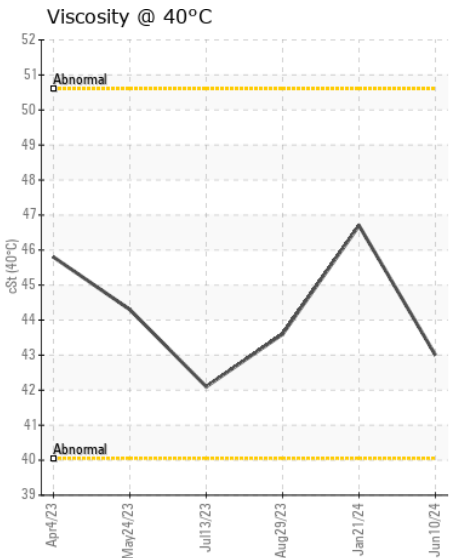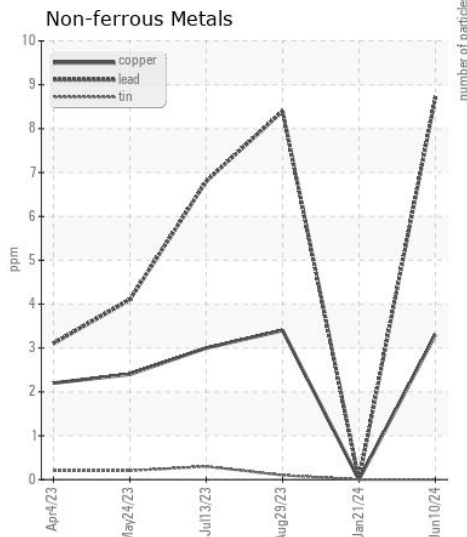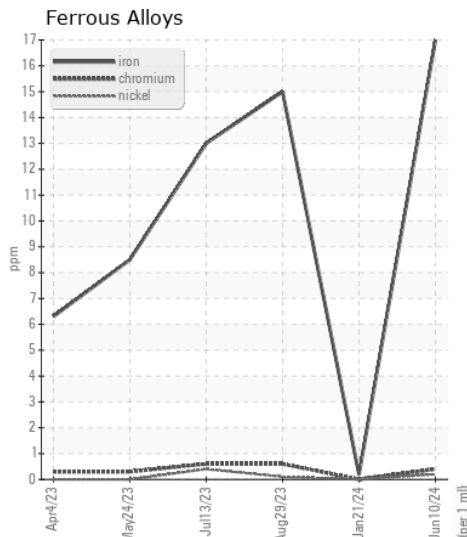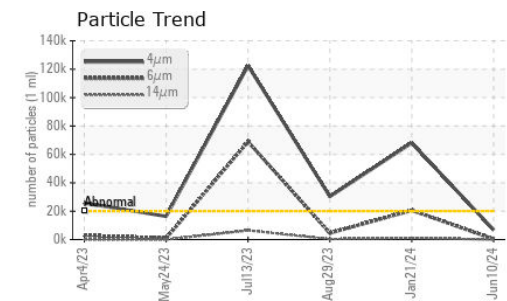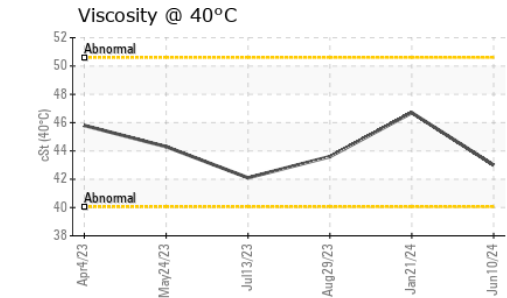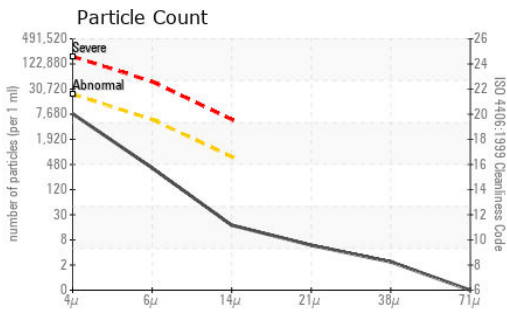

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0291009 **Received** : 11 Jun 2024
Lab Number : 02641166 **Tested** : 12 Jun 2024
Unique Number : 5798705 **Diagnosed** : 12 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

MILLER PAVING LTD.
 P.O BOX 4080, 505 MILLER AVE.
 MARKHAM, ON
 CA L6G 1B2
 Contact: Rob Graham
 rob.graham@millergroup.ca
 T: (905)475-6660
 F: (905)475-1086