



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(358361)
Machine Id
LIEBHERR LH40M 133820-1215
Component
Hydraulic System
Fluid
{not provided} (605 LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0289647	LH0256536	LH0203062
Sample Date		Client Info		10 Jun 2024	29 Mar 2023	31 Aug 2022
Machine Age	hrs	Client Info		9259	1521	1001
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>60	32	26	21
Chromium	ppm	ASTM D5185(m)	>40	<1	<1	0
Nickel	ppm	ASTM D5185(m)	>10	0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>5	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>5	0	<1	<1
Copper	ppm	ASTM D5185(m)	>15	3	2	2
Tin	ppm	ASTM D5185(m)	>5	0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION








The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>15	2	2	2
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>20000	770	6637	1947
Particles >6µm		ASTM D7647	>5000	203	2080	378
Particles >14µm		ASTM D7647	>640	17	157	21
Particles >21µm		ASTM D7647	>160	4	33	5
Particles >38µm		ASTM D7647	>40	0	1	1
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	17/15/11	20/18/14	18/16/12
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	1	1
Boron	ppm	ASTM D5185(m)		<1	<1	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)		3	2	2
Calcium	ppm	ASTM D5185(m)		512	705	725
Phosphorus	ppm	ASTM D5185(m)		466	543	500
Zinc	ppm	ASTM D5185(m)		583	599	606
Sulfur	ppm	ASTM D5185(m)		2059	2614	2696
Visc @ 40°C	cSt	ASTM D7279(m)		43.2	42.8	43.0

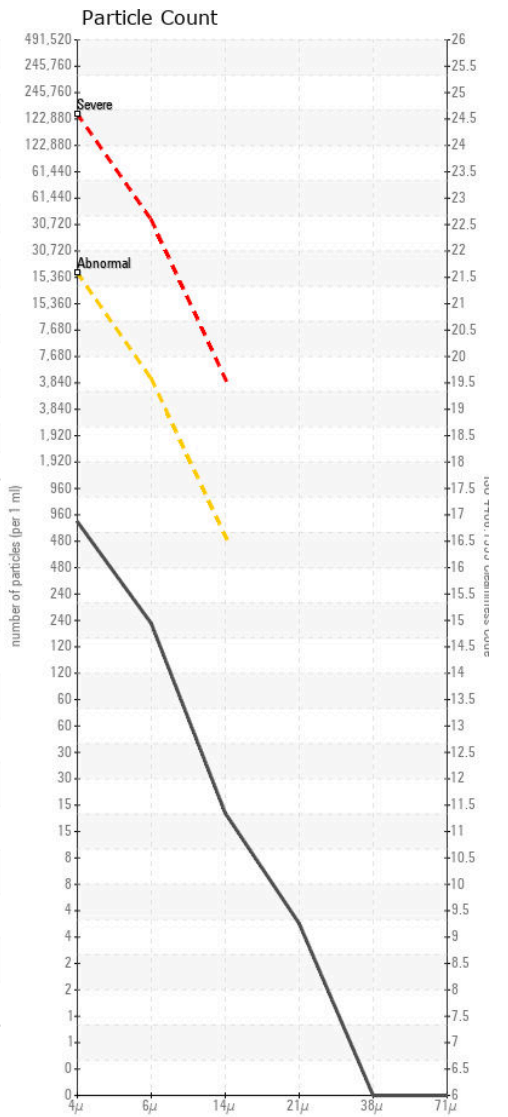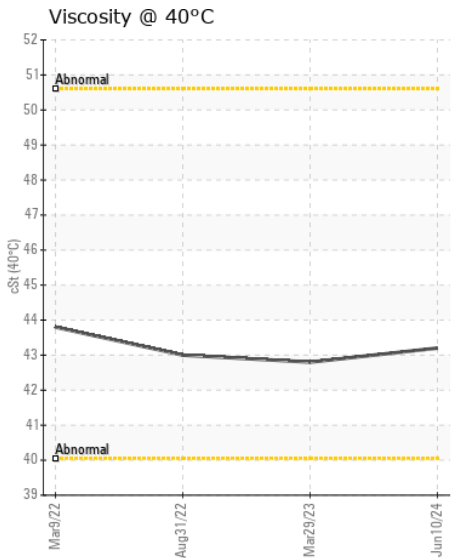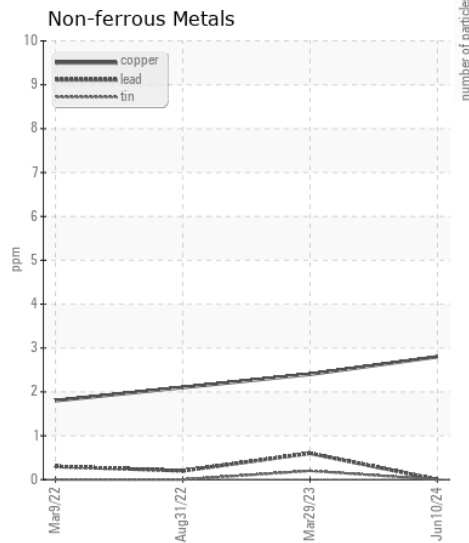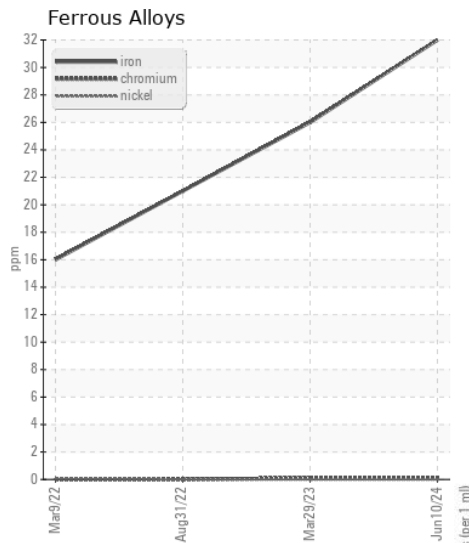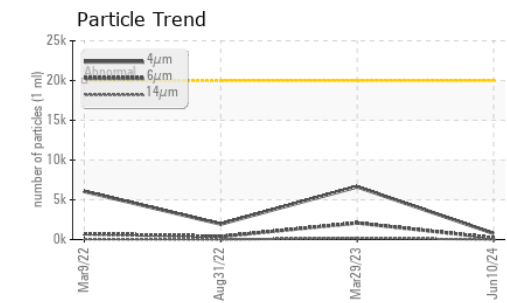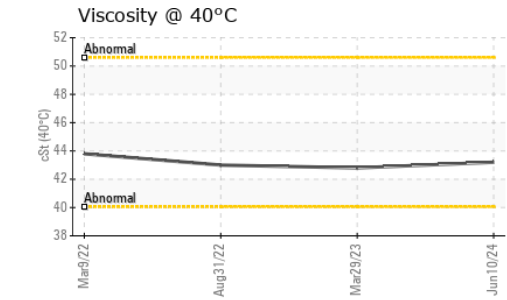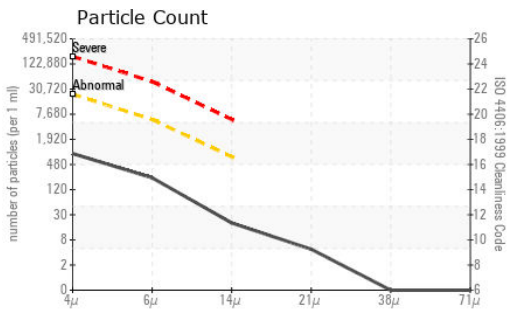

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0289647 **Received** : 11 Jun 2024
Lab Number : 02641184 **Tested** : 12 Jun 2024
Unique Number : 5798723 **Diagnosed** : 12 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PrtCount)

METALOGICS INC.
 895 COLLINSON RD.
 DUNDAS, ON
 CA L9H 5E2
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: