



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR R945 058083-1866
Component
Splitter Box
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0291013	LH0278790	---
Sample Date		Client Info		10 Jun 2024	29 Jan 2024	---
Machine Age	hrs	Client Info		913	444	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	16	21	---
Chromium	ppm	ASTM D5185(m)	>5	0	0	---
Nickel	ppm	ASTM D5185(m)	>5	0	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	<1	---
Lead	ppm	ASTM D5185(m)	>30	0	<1	---
Copper	ppm	ASTM D5185(m)	>20	<1	<1	---
Tin	ppm	ASTM D5185(m)	>10	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	0	1	---
Potassium	ppm	ASTM D5185(m)	>20	<1	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>170	2	2	---
Boron	ppm	ASTM D5185(m)	400	187	<1	---
Barium	ppm	ASTM D5185(m)	200	0	0	---
Molybdenum	ppm	ASTM D5185(m)	12	0	0	---
Manganese	ppm	ASTM D5185(m)		<1	<1	---
Magnesium	ppm	ASTM D5185(m)	12	2	2	---
Calcium	ppm	ASTM D5185(m)	150	15	10	---
Phosphorus	ppm	ASTM D5185(m)	1650	1291	1413	---
Zinc	ppm	ASTM D5185(m)	125	18	12	---
Sulfur	ppm	ASTM D5185(m)	22500	21470	23623	---
Visc @ 40°C	cSt	ASTM D7279(m)	143	122	195	---

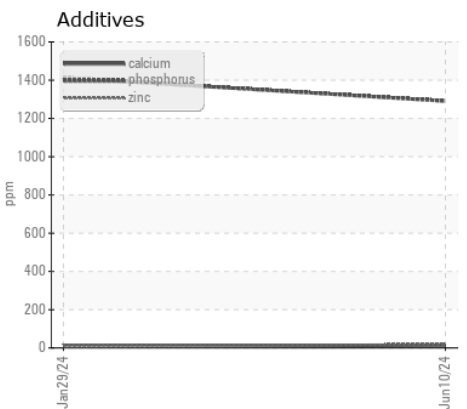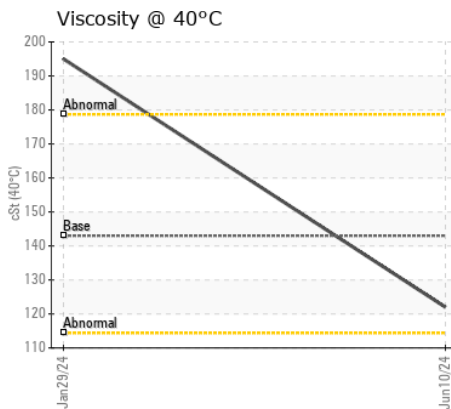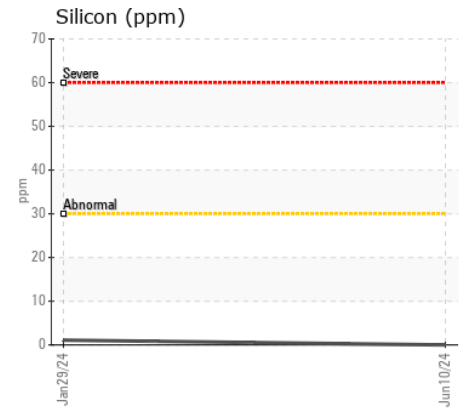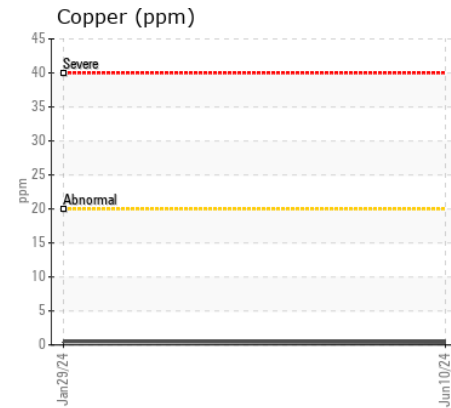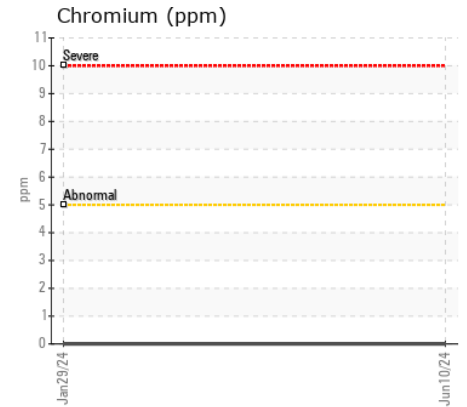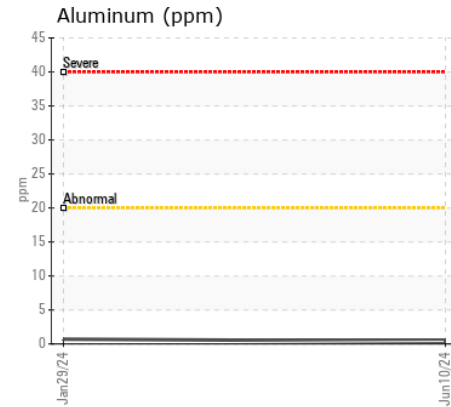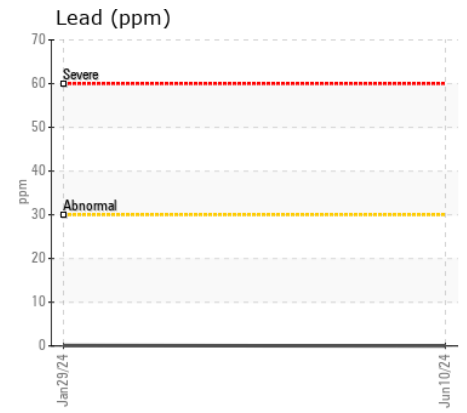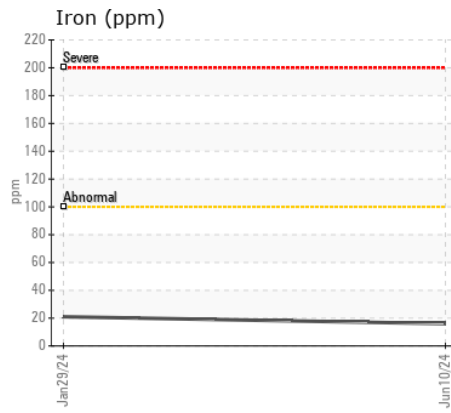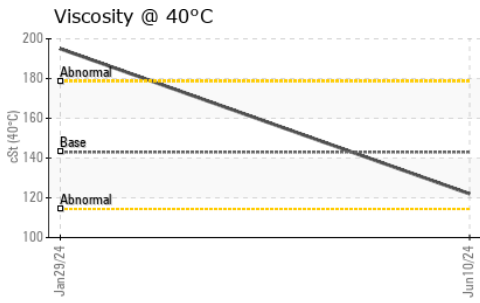

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0291013 **Received** : 11 Jun 2024
Lab Number : 02641239 **Tested** : 11 Jun 2024
Unique Number : 5798778 **Diagnosed** : 11 Jun 2024 - Wes Davis
Test Package : MOB 1

GERDAU AMERISTEEL
 2025 RIVER RD.
 LONDON, ON
 CA N5W 6C4
 Contact: Scott MacDonald

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (519)455-4639
 F: (519)451-3623