

Area
MICHAUDVILLE
Machine Id
1587
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0082906	PC0083888	PC0077369
Sample Date		Client Info		11 Jun 2024	03 Dec 2023	25 Jul 2023
Machine Age	hrs	Client Info		16380	15850	15332
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	8	13	17
Chromium	ppm	ASTM D5185(m)	>20	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	3	6	8
Lead	ppm	ASTM D5185(m)	>40	<1	2	7
Copper	ppm	ASTM D5185(m)	>330	<1	<1	2
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	5	8
Potassium	ppm	ASTM D5185(m)	>20	7	16	23
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	7.8	9.1	10.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.8	21.5	22.6
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	4	5
Boron	ppm	ASTM D5185(m)	250	1	2	2
Barium	ppm	ASTM D5185(m)	10	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	100	57	59	60
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)	450	949	976	1025
Calcium	ppm	ASTM D5185(m)	3000	1145	1140	1144
Phosphorus	ppm	ASTM D5185(m)	1150	998	1017	1105
Zinc	ppm	ASTM D5185(m)	1350	1196	1241	1261
Sulfur	ppm	ASTM D5185(m)	4250	2489	2511	2533
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.8	18.1	19.7
Visc @ 40°C	cSt	ASTM D7279(m)	73	88.8	91.3	94.0
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	13.2	13.5	13.7
Viscosity Index (VI)	Scale	ASTM D2270*	138	148	149	147

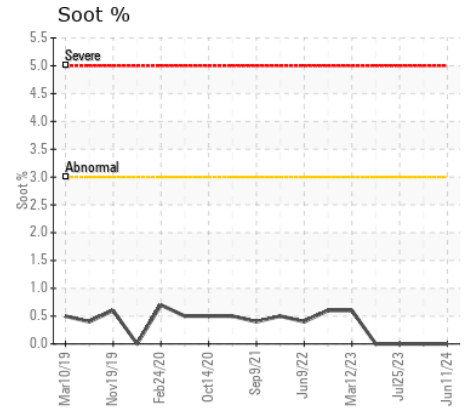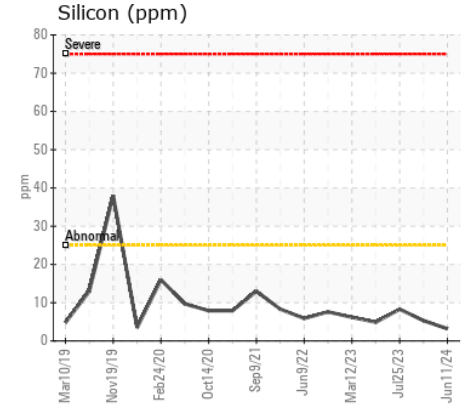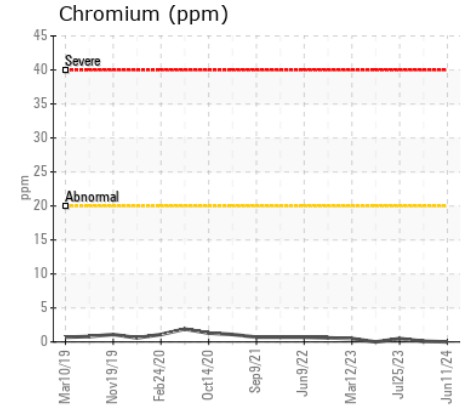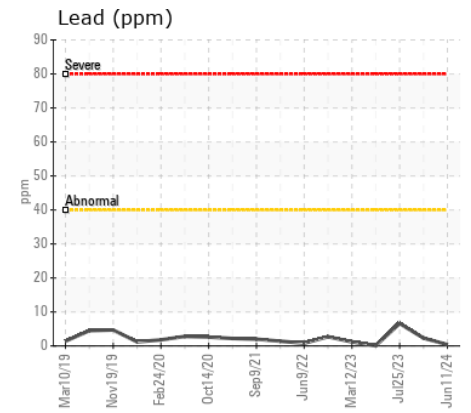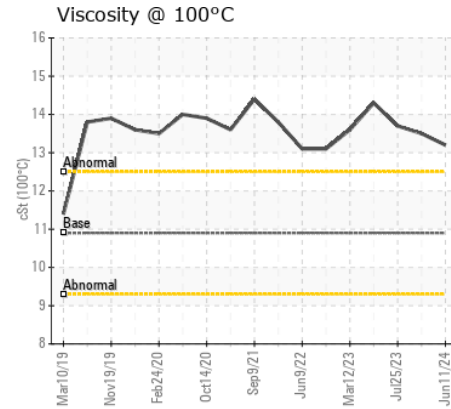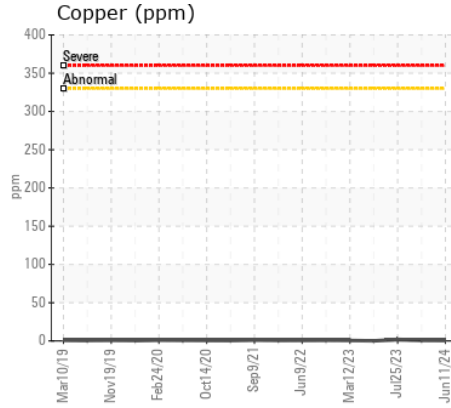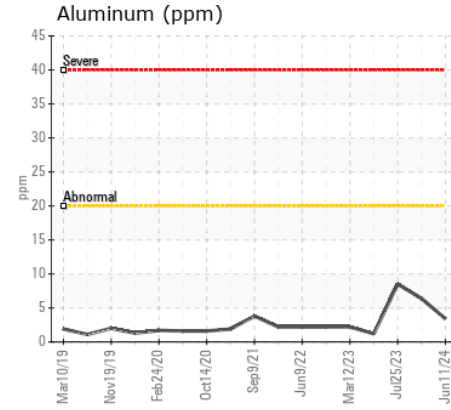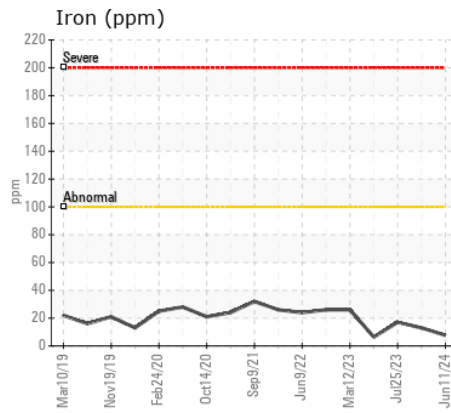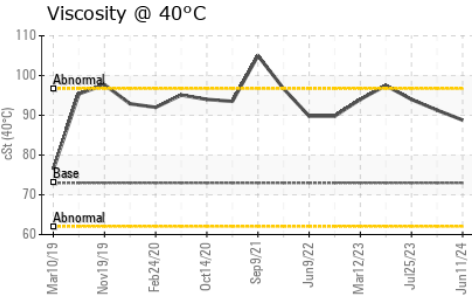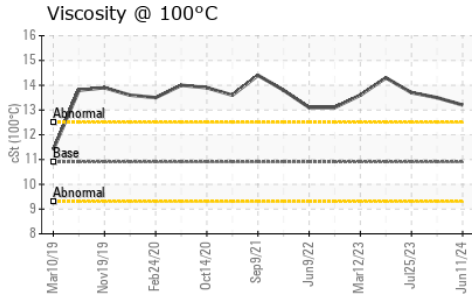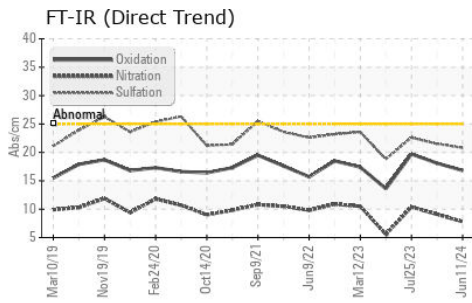

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0082906
Lab Number : 02641367
Unique Number : 5798906
Test Package : MOB 1 (Additional Tests: KV40, VI)

LES ENTREPRISES MICHAUVILLE INC.
 270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: