



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1596
 Component
Transmission (Manual)
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.











CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0082960	PC0083657	PC0075958
Sample Date		Client Info		11 Jun 2024	08 Feb 2024	26 Sep 2023
Machine Age	kms	Client Info		178830	3923	3457
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
Iron	ppm	ASTM D5185(m)	>200	91	75	88
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		<1	0	0
Silver	ppm	ASTM D5185(m)	>7	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>25	4	3	4
Lead	ppm	ASTM D5185(m)	>45	<1	<1	1
Copper	ppm	ASTM D5185(m)	>225	43	30	36
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>125	2	2	4
Potassium	ppm	ASTM D5185(m)	>20	2	3	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		6	5	6
Boron	ppm	ASTM D5185(m)		228	181	240
Barium	ppm	ASTM D5185(m)		4	2	4
Molybdenum	ppm	ASTM D5185(m)		0	0	<1
Manganese	ppm	ASTM D5185(m)		10	8	10
Magnesium	ppm	ASTM D5185(m)		3	2	3
Calcium	ppm	ASTM D5185(m)		61	52	61
Phosphorus	ppm	ASTM D5185(m)		1022	864	1057
Zinc	ppm	ASTM D5185(m)		11	9	11
Sulfur	ppm	ASTM D5185(m)		395	370	415
Visc @ 40°C	cSt	ASTM D7279(m)		88.5	88.3	88.8
Visc @ 100°C	cSt	ASTM D7279(m)		13.7	13.8	13.7
Viscosity Index (VI)	Scale	ASTM D2270*		157	159	157

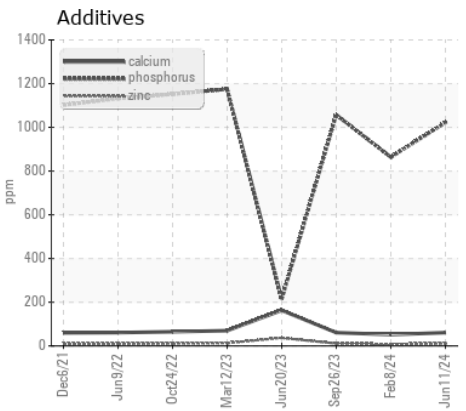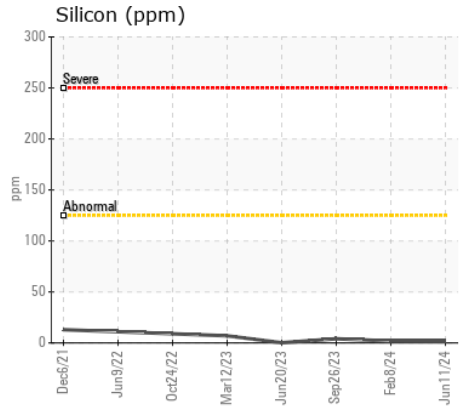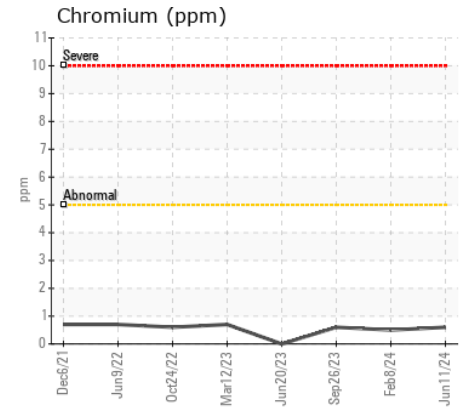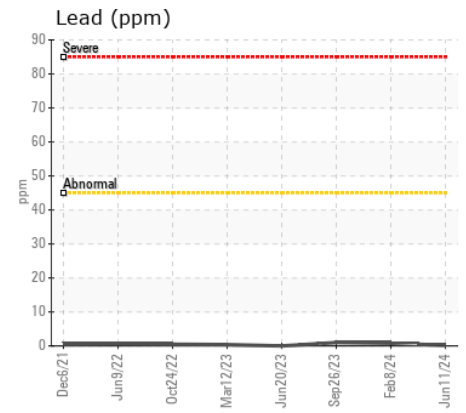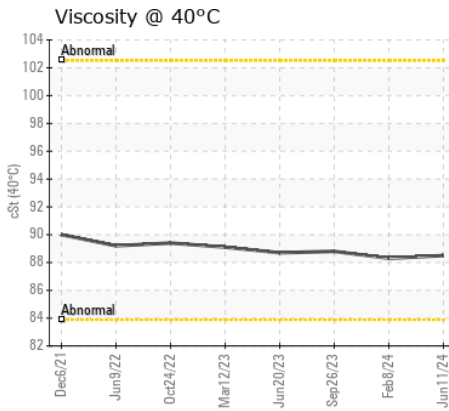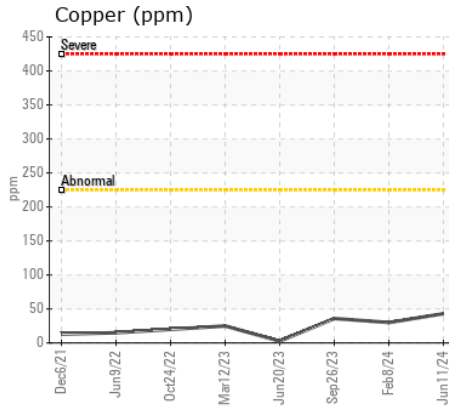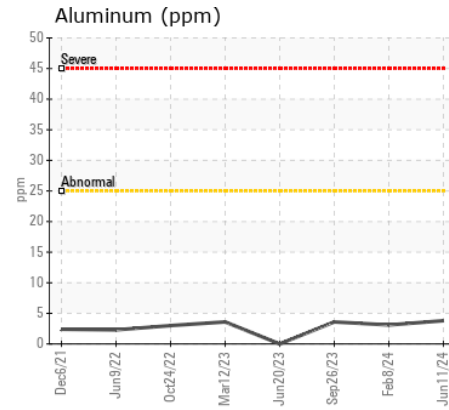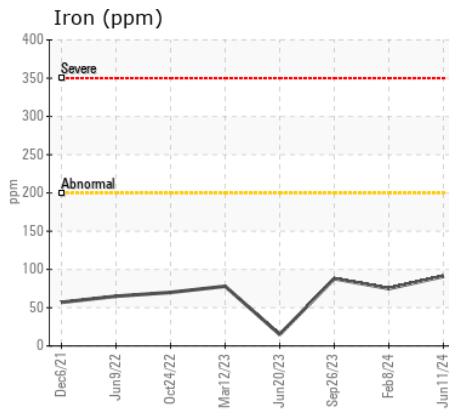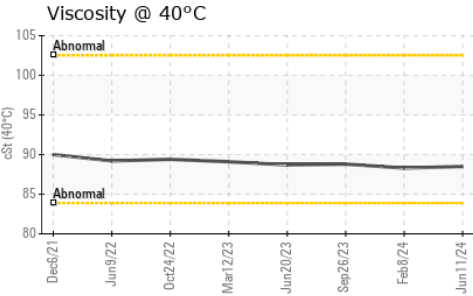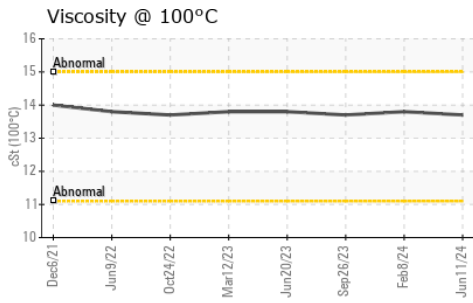

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0082960
Lab Number : 02641461
Unique Number : 5799000
Test Package : MOB 1 (Additional Tests: KV100, VI)

LES ENTREPRISES MICHAUVILLE INC.
 270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: