



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
096750-1204

Component
Splitter Box

Fluid
PETRO CANADA TRAXON SYNTHETIC 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0291292	LH0285141	LH0274878
Sample Date		Client Info		07 Jun 2024	05 Feb 2024	31 Oct 2023
Machine Age	hrs	Client Info		11518	10945	10469
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	20	39	57
Chromium	ppm	ASTM D5185(m)	>5	0	<1	1
Nickel	ppm	ASTM D5185(m)	>5	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<1	1	1
Lead	ppm	ASTM D5185(m)	>30	0	<1	<1
Copper	ppm	ASTM D5185(m)	>20	1	2	4
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	<1	2	4
Potassium	ppm	ASTM D5185(m)	>20	4	11	23
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	4	5	8
Boron	ppm	ASTM D5185(m)	328	138	52	109
Barium	ppm	ASTM D5185(m)	1	0	0	<1
Molybdenum	ppm	ASTM D5185(m)		<1	2	4
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	1	2	2	3
Calcium	ppm	ASTM D5185(m)	7	105	69	80
Phosphorus	ppm	ASTM D5185(m)	1145	939	874	1032
Zinc	ppm	ASTM D5185(m)	3	260	265	382
Sulfur	ppm	ASTM D5185(m)	17909	14120	15339	13596
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	68.3	71.3	70.0

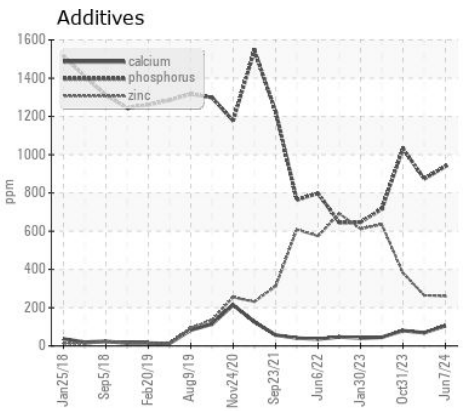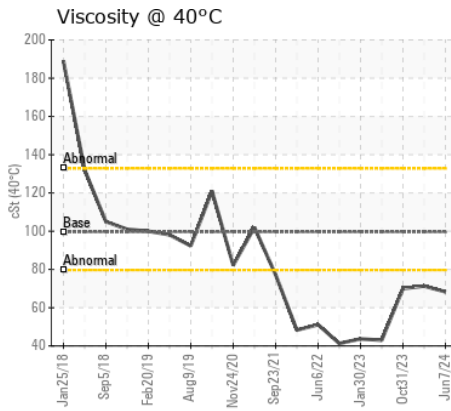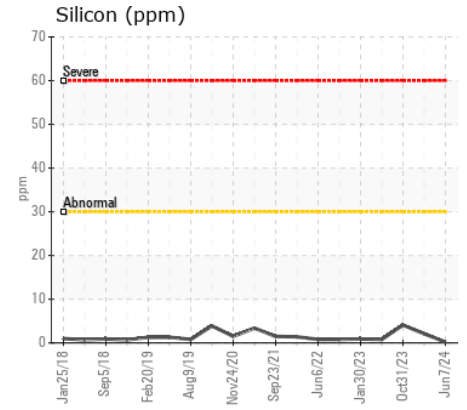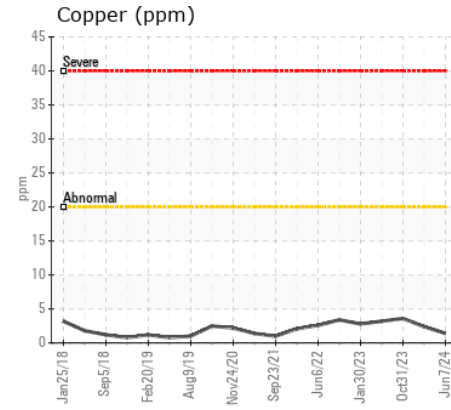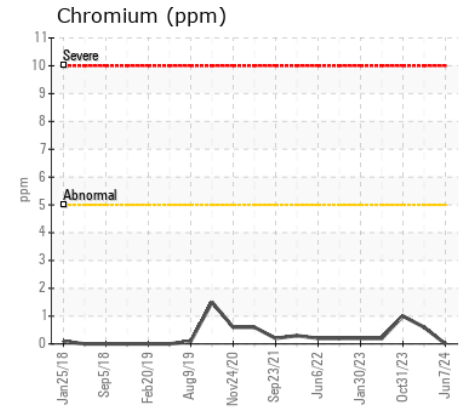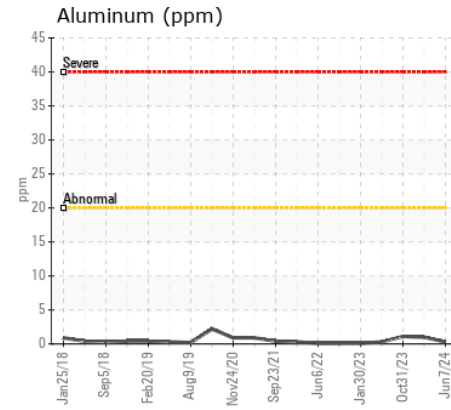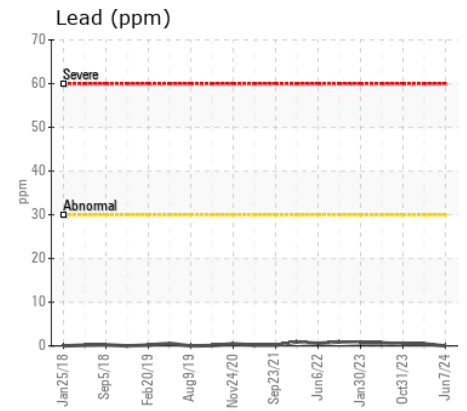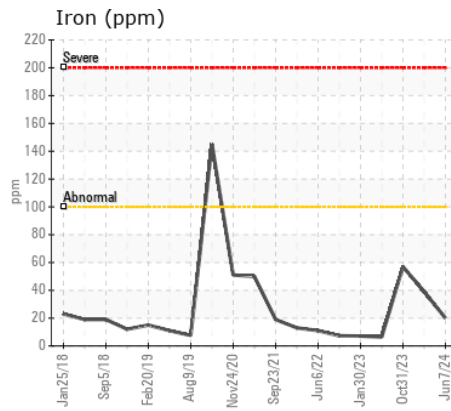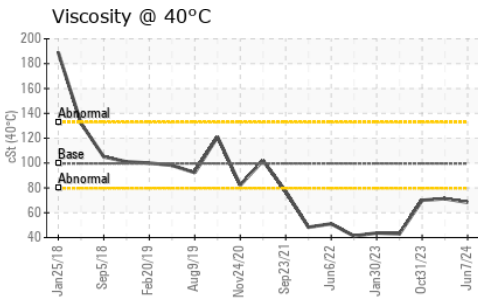

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0291292 **Received** : 12 Jun 2024
Lab Number : 02641496 **Tested** : 12 Jun 2024
Unique Number : 5799035 **Diagnosed** : 12 Jun 2024 - Wes Davis
Test Package : MOB 1

American Iron and Metal
 120 Bentley Avenue
 Ottawa, ON
 CA K2E 6T9
 Contact: Yvon Lalonde

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (819)230-7247
 F: