



LIEBHERR

OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
LIEBHERR LH22M 110435-1250

Component
Front Axle

Fluid
PETRO CANADA TRAXON 75W90 SYNTHETIC (10 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | LH0288032 | LH0283997 | LH0260471 |
| Sample Date | | Client Info | | 30 May 2024 | 31 Jan 2024 | 14 Aug 2023 |
| Machine Age | hrs | Client Info | | 13142 | 12137 | 11129 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|---------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185(m) | >500 | 2 | 1 | 4 |
| Chromium | ppm | ASTM D5185(m) | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) | >10 | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >25 | 0 | <1 | 0 |
| Lead | ppm | ASTM D5185(m) | >25 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185(m) | >50 | <1 | <1 | <1 |
| Tin | ppm | ASTM D5185(m) | >10 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| White Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE | NONE |

CONTAMINATION










There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|---------------|-------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185(m) | >75 | 0 | 6 | 1 |
| Potassium | ppm | ASTM D5185(m) | >20 | 0 | <1 | <1 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Silt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Debris | scalar | Visual* | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Appearance | scalar | Visual* | NORML | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|---------------|-------|--------------|-------|-------|
| Sodium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |
| Boron | ppm | ASTM D5185(m) | 328 | 320 | 300 | 306 |
| Barium | ppm | ASTM D5185(m) | 1 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) | 1 | <1 | <1 | 2 |
| Calcium | ppm | ASTM D5185(m) | 7 | 4 | 4 | 15 |
| Phosphorus | ppm | ASTM D5185(m) | 1145 | 1233 | 1253 | 1296 |
| Zinc | ppm | ASTM D5185(m) | 3 | 8 | 8 | 16 |
| Sulfur | ppm | ASTM D5185(m) | 17909 | 20588 | 21215 | 20966 |
| Visc @ 40°C | cSt | ASTM D7279(m) | 99.6 | 107 | 107 | 105 |

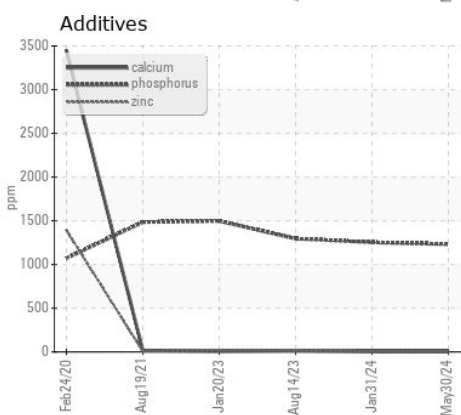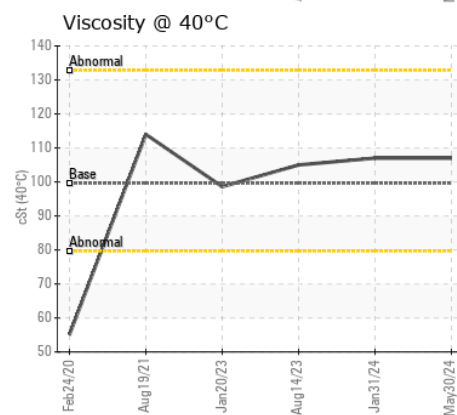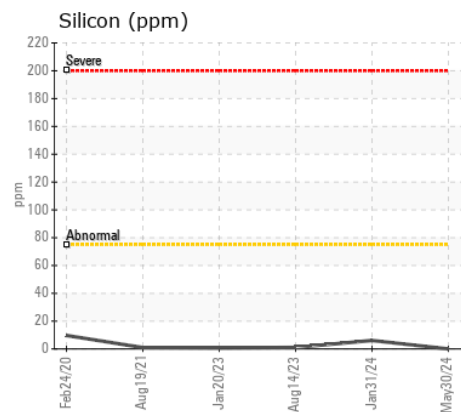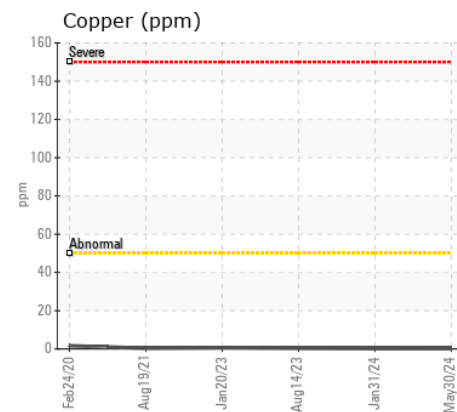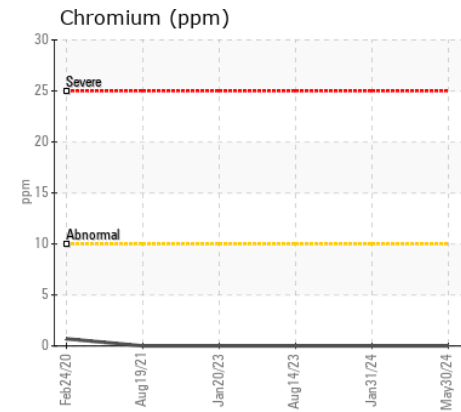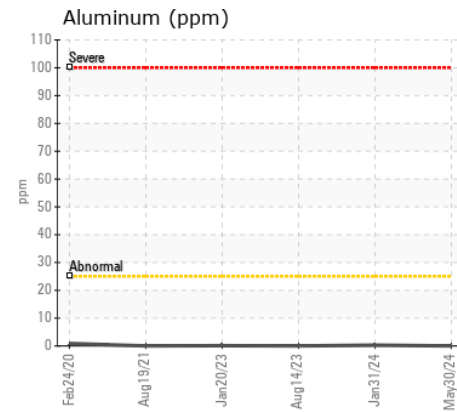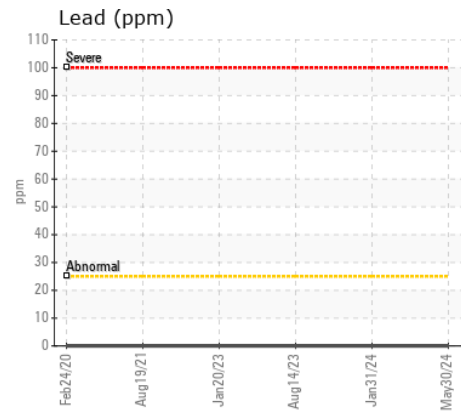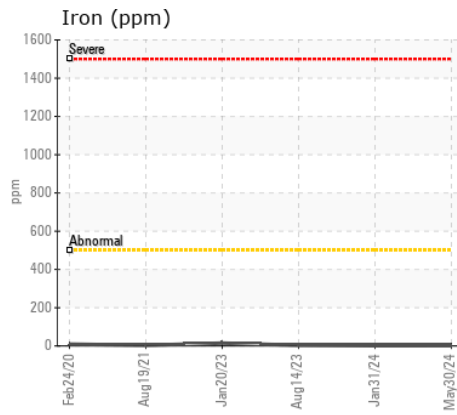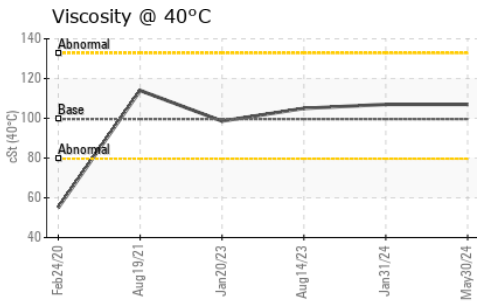

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0288032 **Received** : 12 Jun 2024
Lab Number : 02641504 **Tested** : 12 Jun 2024
Unique Number : 5799043 **Diagnosed** : 12 Jun 2024 - Wes Davis
Test Package : MOB 1

ECOWASTE INDUSTRIES
 4 SPRUCE ST
 NEW WESTMINSTER, BC
 CA V3L 5G6
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: