



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**GFL218**  
Machine Id  
**734009**  
Component  
**Diesel Engine**  
Fluid  
**NOT GIVEN (26 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0125793</b>	GFL0113170	---
Sample Date		Client Info		<b>10 Jun 2024</b>	14 Mar 2024	---
Machine Age	kms	Client Info		<b>11607</b>	7239	---
Oil Age	kms	Client Info		<b>7239</b>	0	---
Filter Age	kms	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

**WEAR**

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>80	<b>15</b>	53	---
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185(m)	>30	<b>1</b>	4	---
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	1	---
Copper	ppm	ASTM D5185(m)	>150	<b>2</b>	15	---
Tin	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---

**CONTAMINATION**











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	<b>6</b>	30	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	3	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.4</b>	9.1	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.1</b>	21.2	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>7</b>	4	---
Boron	ppm	ASTM D5185(m)		<b>15</b>	23	---
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	3	---
Molybdenum	ppm	ASTM D5185(m)		<b>55</b>	93	---
Manganese	ppm	ASTM D5185(m)		<b>1</b>	8	---
Magnesium	ppm	ASTM D5185(m)		<b>560</b>	602	---
Calcium	ppm	ASTM D5185(m)		<b>1521</b>	1180	---
Phosphorus	ppm	ASTM D5185(m)		<b>690</b>	673	---
Zinc	ppm	ASTM D5185(m)		<b>880</b>	744	---
Sulfur	ppm	ASTM D5185(m)		<b>1988</b>	2354	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>17.1</b>	16.4	---
Visc @ 100°C	cSt	ASTM D7279(m)		<b>14.2</b>	13.5	---

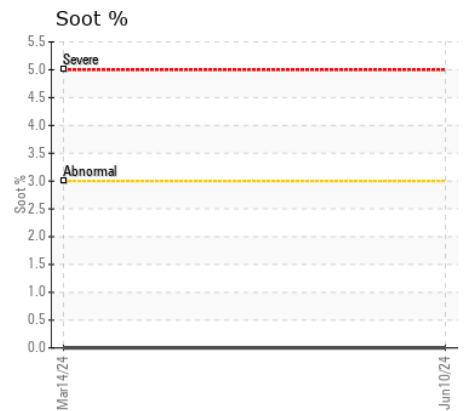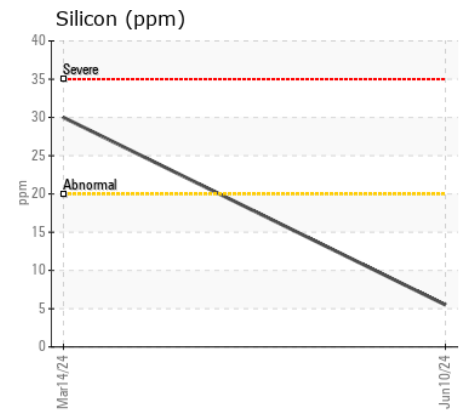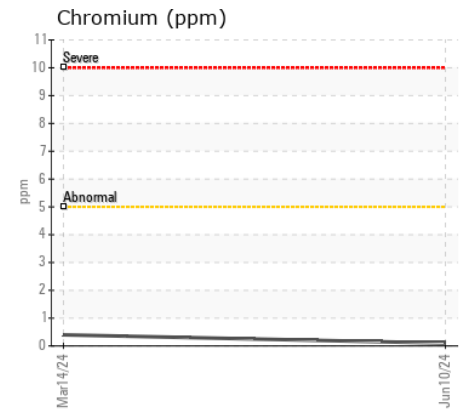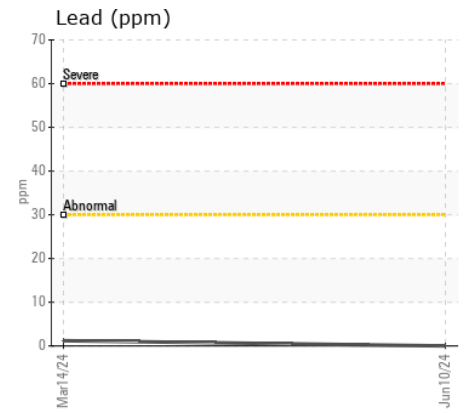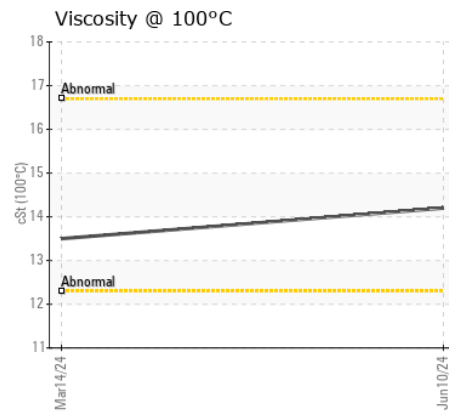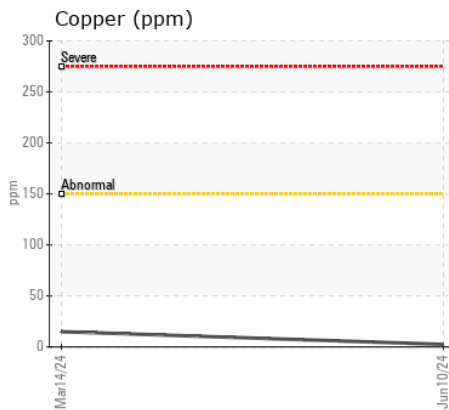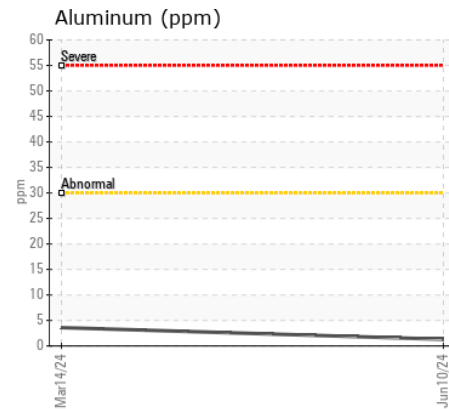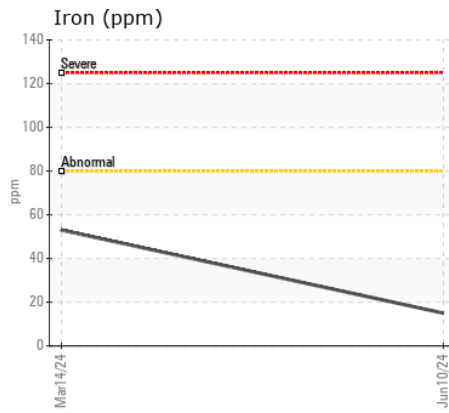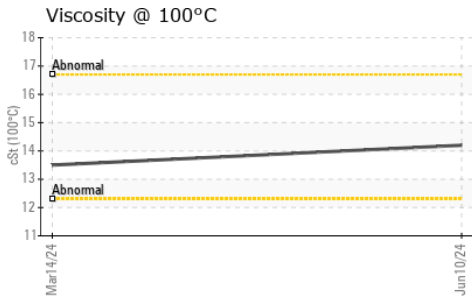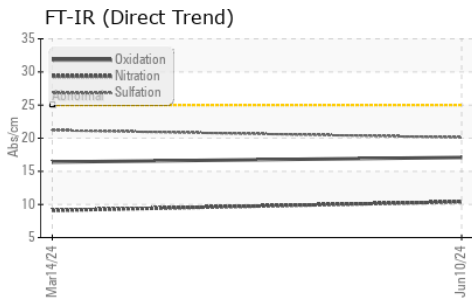

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0125793  
**Lab Number** : 02641566  
**Unique Number** : 5799105  
**Test Package** : MOB 1

**GFL Environmental - 225 - COT(D2)**  
 20 Brydon Drive  
 Etobicoke, ON  
 CA M9W 5R6  
 Contact: Rick Philip  
 rphilip@gflenv.com  
 T: (416)745-8080  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.