



Area
GFL216
Machine Id
413112
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0121953	GFL0107345	GFL0101397
Sample Date		Client Info		10 Jun 2024	05 Apr 2024	29 Nov 2023
Machine Age	kms	Client Info		0	46499	0
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	9	10	13
Chromium	ppm	ASTM D5185(m)	>20	0	0	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	1	<1	2
Lead	ppm	ASTM D5185(m)	>40	0	0	2
Copper	ppm	ASTM D5185(m)	>330	4	15	81
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	2	3
Potassium	ppm	ASTM D5185(m)	>20	9	2	3
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol	%	ASTM D7922*		0.0	NEG	NEG
Soot %	%	ASTM D7844*	>4	0.2	0.2	0.2
Nitration	Abs/cm	ASTM D7624*	>20	8.0	8.2	8.7
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.1	18.9	20.0
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		10	1	1
Boron	ppm	ASTM D5185(m)	0	3	5	3
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	60	61	60	59
Manganese	ppm	ASTM D5185(m)	0	<1	<1	0
Magnesium	ppm	ASTM D5185(m)	1010	980	962	942
Calcium	ppm	ASTM D5185(m)	1070	1032	1054	1032
Phosphorus	ppm	ASTM D5185(m)	1150	1010	989	956
Zinc	ppm	ASTM D5185(m)	1270	1191	1176	1173
Sulfur	ppm	ASTM D5185(m)	2060	2583	2493	2334
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.3	14.9	15.9
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.1	13.8	13.8

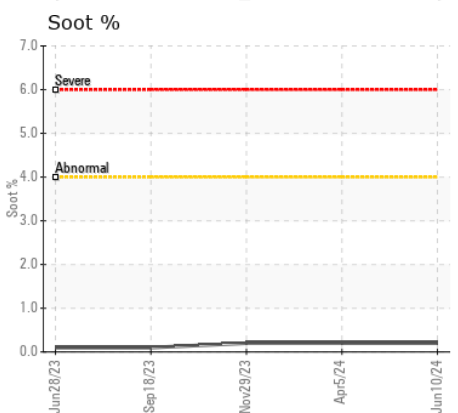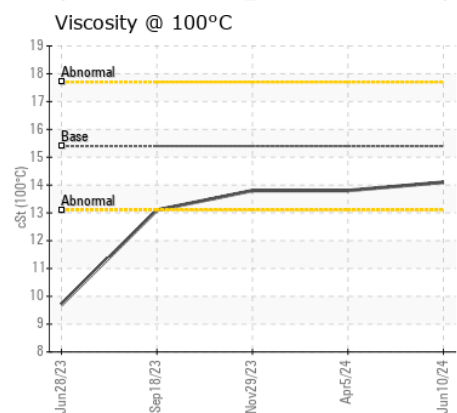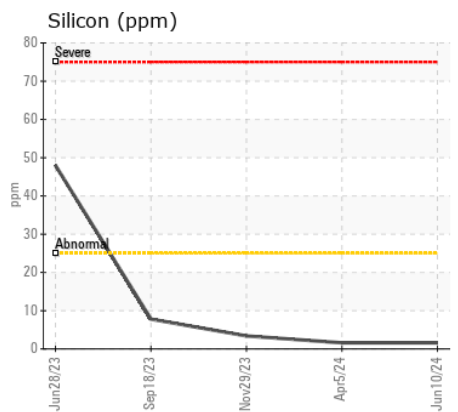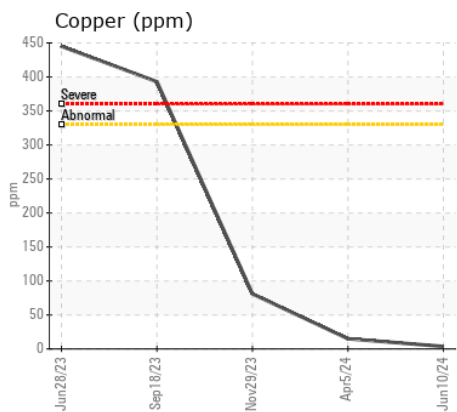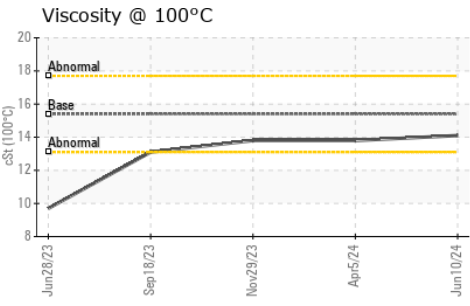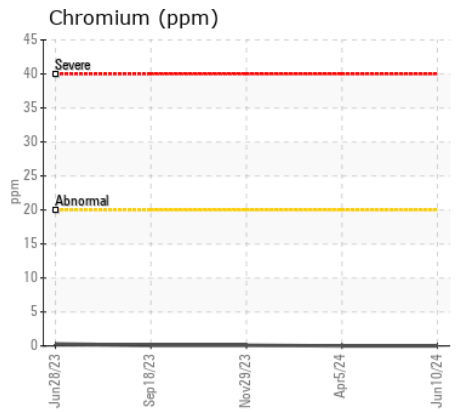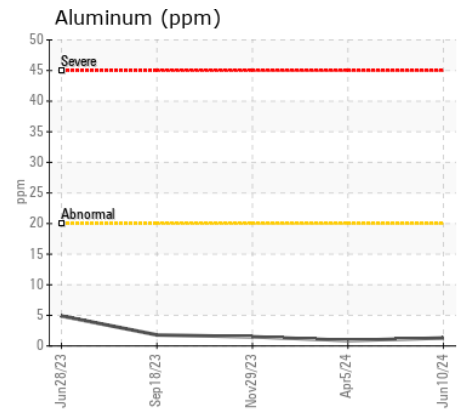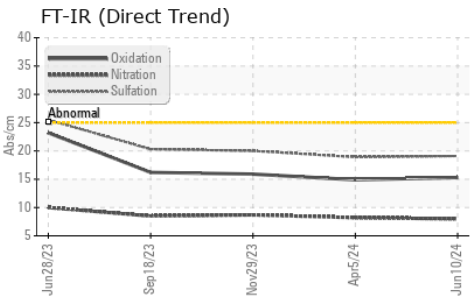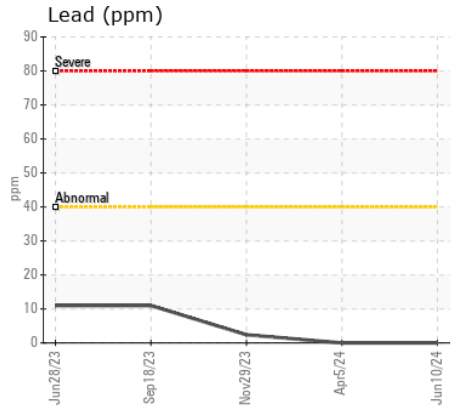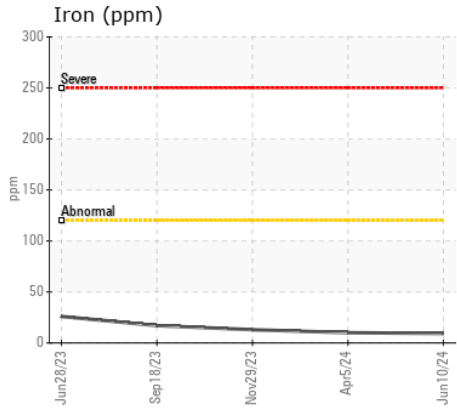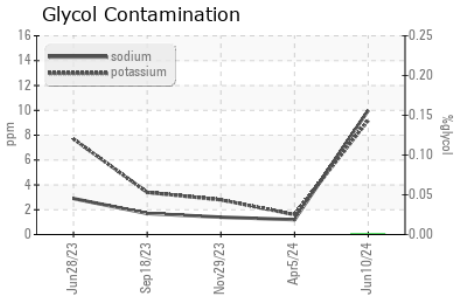

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0121953
Lab Number : 02641600
Unique Number : 5799139
Test Package : MOB 1 (Additional Tests: Glycol)
Received : 13 Jun 2024
Tested : 13 Jun 2024
Diagnosed : 13 Jun 2024 - Wes Davis

GFL Environmental - 252 - GTA Hauling
 3668 Weston Road
 North York, ON
 CA M9L 1W2
 Contact: Amanda Cipollone
 acipollone@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.