



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
ACCUR PRESS GRAY (S/N 14247)
 Component
Hydraulic System
 Fluid
CHEVRON HYDRAULIC OIL AW ISO 46 (--- GAL)

RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0806201	---	---
Sample Date		Client Info		03 Jun 2024	---	---
Machine Age	hrs	Client Info		2119	---	---
Oil Age	hrs	Client Info		2119	---	---
Filter Age	hrs	Client Info		2119	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>20	<1	---	---
Chromium	ppm	ASTM D5185(m)	>10	0	---	---
Nickel	ppm	ASTM D5185(m)	>10	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>10	0	---	---
Lead	ppm	ASTM D5185(m)	>10	0	---	---
Copper	ppm	ASTM D5185(m)	>75	<1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185(m)	>20	0	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 11812	---	---
Particles >6µm		ASTM D7647	>1300	● 1689	---	---
Particles >14µm		ASTM D7647	>160	78	---	---
Particles >21µm		ASTM D7647	>40	22	---	---
Particles >38µm		ASTM D7647	>10	2	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 21/18/13	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Sodium	ppm	ASTM D5185(m)		0	---	---
Boron	ppm	ASTM D5185(m)		2	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		7	---	---
Calcium	ppm	ASTM D5185(m)		55	---	---
Phosphorus	ppm	ASTM D5185(m)		340	---	---
Zinc	ppm	ASTM D5185(m)		422	---	---
Sulfur	ppm	ASTM D5185(m)		741	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*		0.44	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	43.7	45.1	---	---

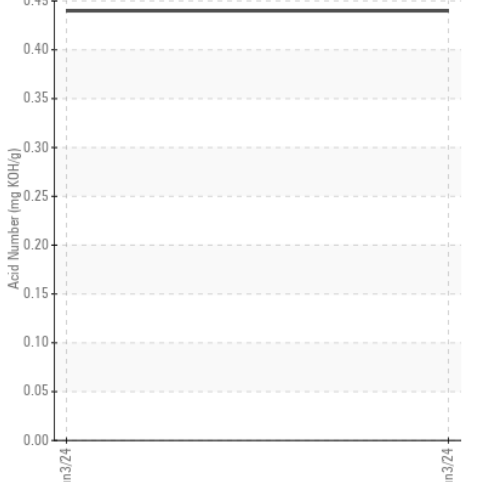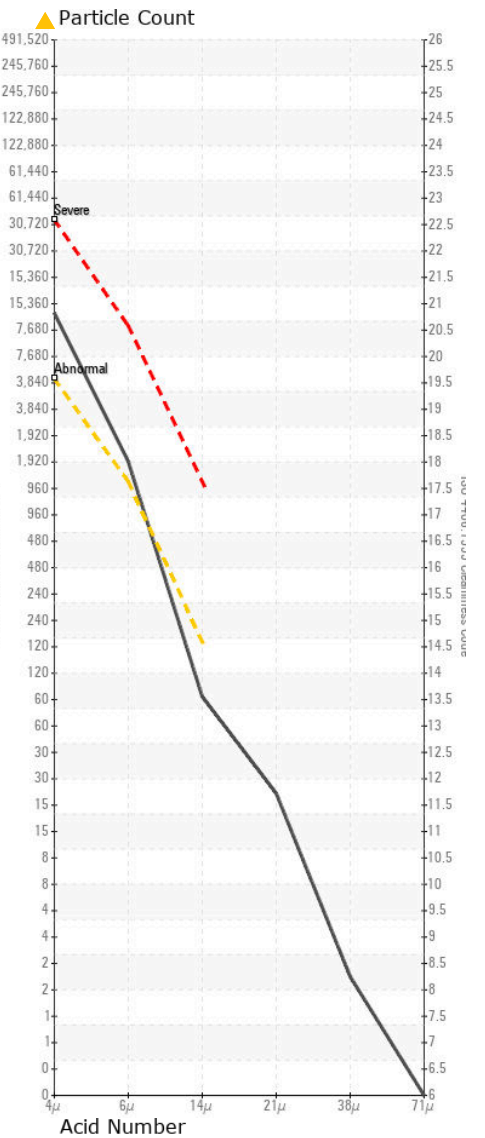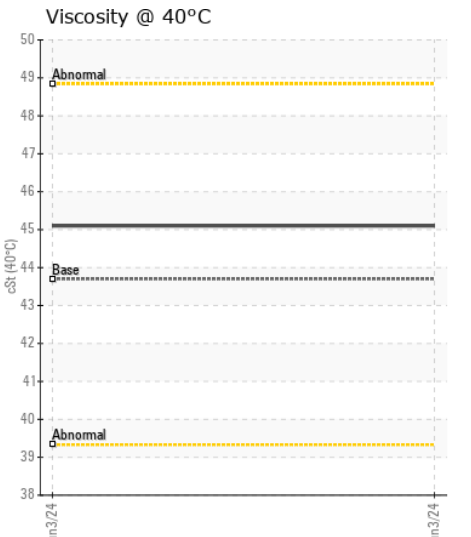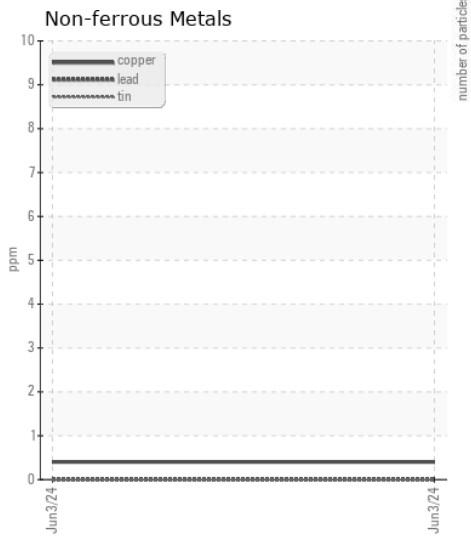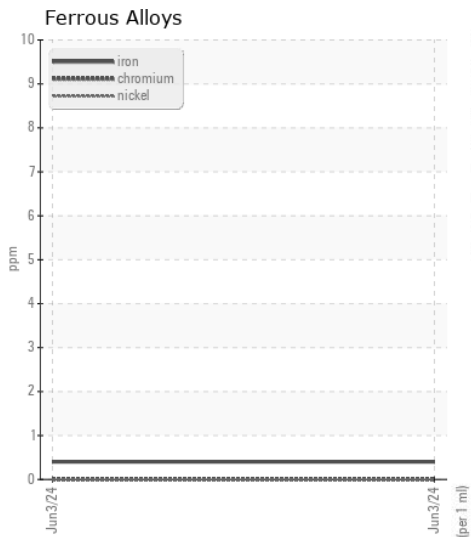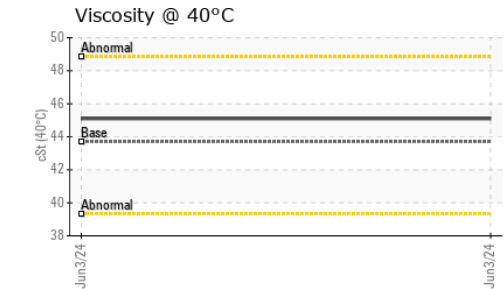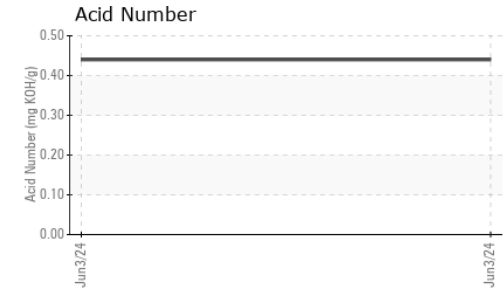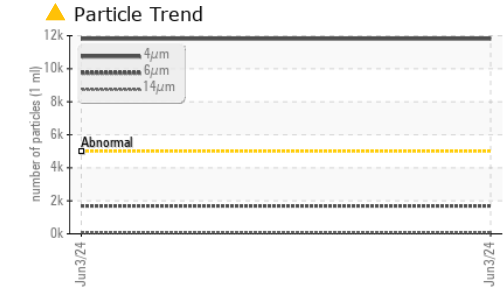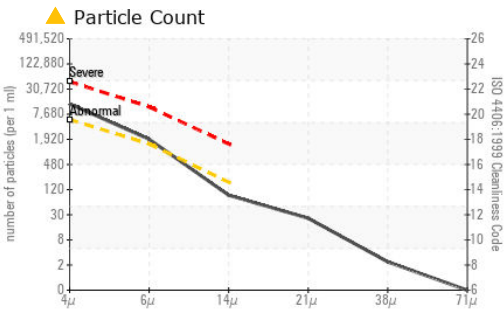

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0806201 **Received** : 13 Jun 2024
Lab Number : 02641700 **Tested** : 14 Jun 2024
Unique Number : 5799239 **Diagnosed** : 14 Jun 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: TAN Auto, TAN Man)

SUPREME INTERNATIONAL
 BOX 6450
 WETASKIWIN, AB
 CA T9A 2G2
 Contact: LORNE EHLERT
 lehlert@supremeinternational.com
 T: (780)352-6061
 F: (780)352-6056

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.