

Machine Id
NETSTAL P12 (S/N 2006044701)

Component
Hydraulic System

Fluid
PETRO CANADA PURITY FG HYDRAULIC AW 68 (700 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0087673	PC0044240	PC411181
Sample Date		Client Info		12 Jun 2024	19 Jan 2022	28 Aug 2020
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	10000
Filter Age	hrs	Client Info		0	0	10000
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>40	0	0	0
Chromium	ppm	ASTM D5185(m)	>4	0	0	0
Nickel	ppm	ASTM D5185(m)	>20	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	<1
Aluminum	ppm	ASTM D5185(m)	>4	0	0	0
Lead	ppm	ASTM D5185(m)	>10	0	0	0
Copper	ppm	ASTM D5185(m)	>60	0	<1	<1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION














The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>20	0	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	0	<1	<1
Water		WC Method	>0.05	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	46	249	269
Particles >6µm		ASTM D7647	>1300	20	92	103
Particles >14µm		ASTM D7647	>160	3	14	17
Particles >21µm		ASTM D7647	>40	1	4	7
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	13/11/9	15/14/11	15/14/11
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		0	0	0
Boron	ppm	ASTM D5185(m)		<1	<1	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		<1	0	<1
Calcium	ppm	ASTM D5185(m)		0	<1	<1
Phosphorus	ppm	ASTM D5185(m)		371	416	329
Zinc	ppm	ASTM D5185(m)		1	2	3
Sulfur	ppm	ASTM D5185(m)		452	481	790
Acid Number (AN)	mg KOH/g	ASTM D974*	0.26	0.15	0.17	0.20
Visc @ 40°C	cSt	ASTM D7279(m)	63.34	64.4	64.8	66.3
Visc @ 100°C	cSt	ASTM D7279(m)	8.409	8.7	8.7	8.5
Viscosity Index (VI)	Scale	ASTM D2270*	102	107	106	97

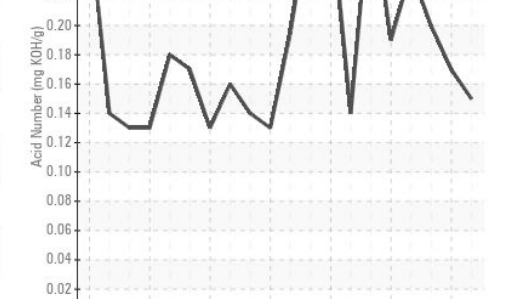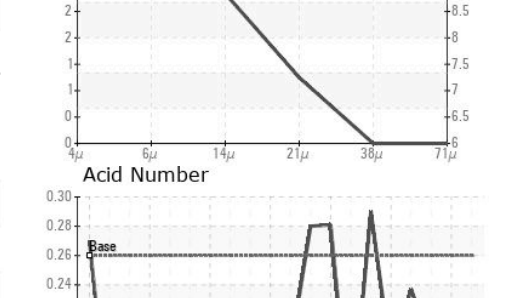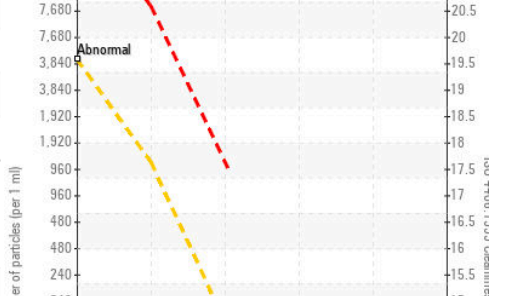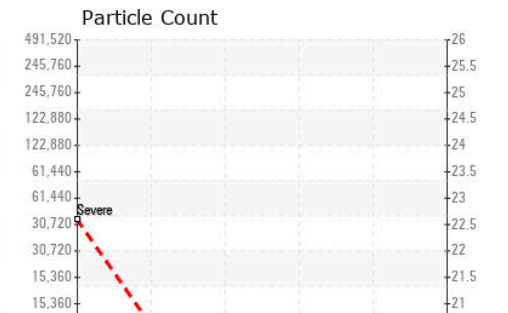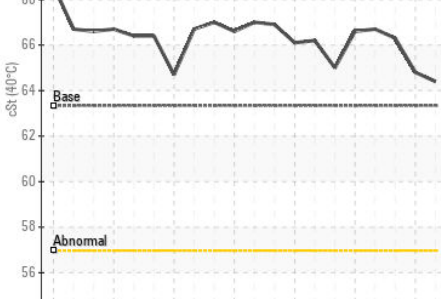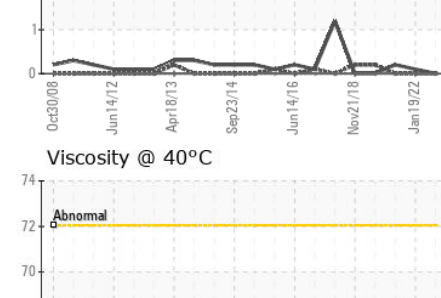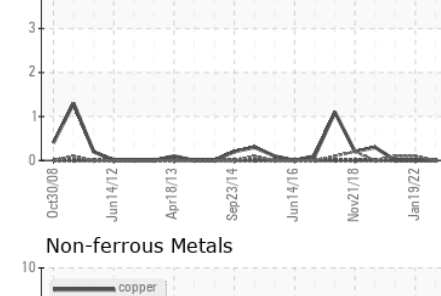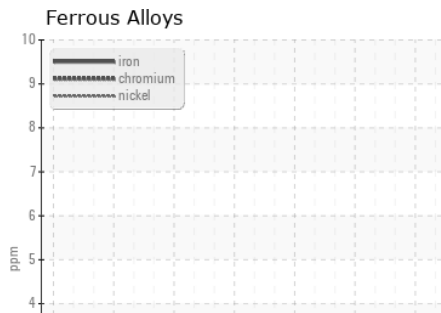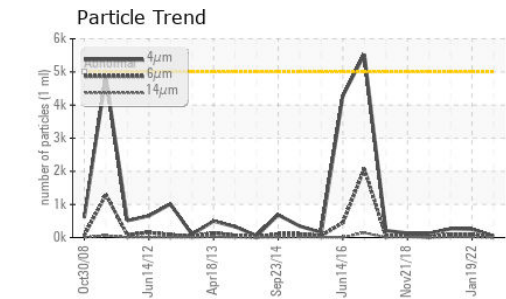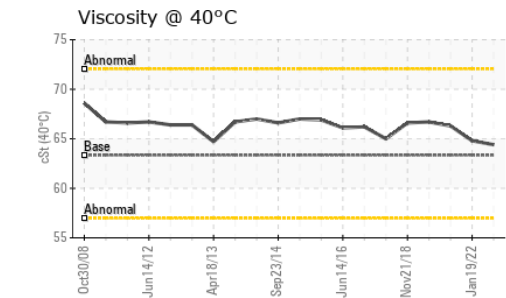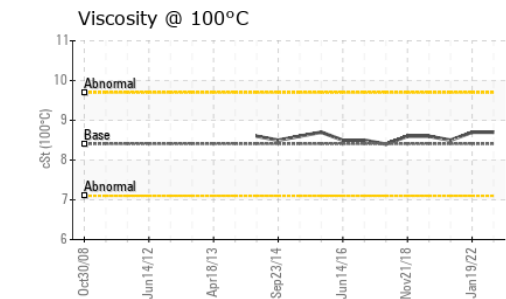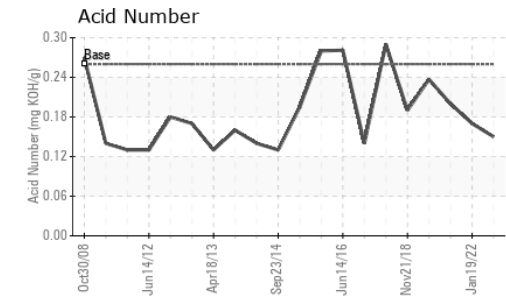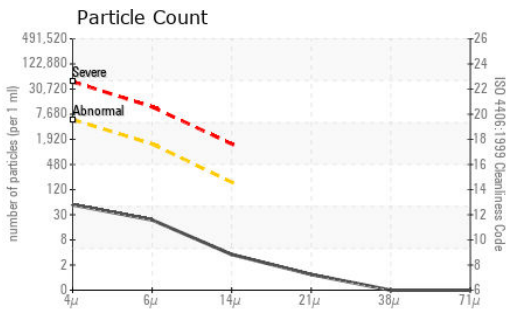

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0087673 **Received** : 13 Jun 2024
Lab Number : 02641721 **Tested** : 14 Jun 2024
Unique Number : 5799260 **Diagnosed** : 14 Jun 2024 - Wes Davis
Test Package : IND 2 (Additional Tests: KV100, VI)

North America IML Container
 2625, Route 344
 St. Placide, QC
 CA J0V 2B0
 Contact: Corinna Bouchard
 cbouchard@iml.ca
 T: (450)258-3130
 F: (450)258-3345

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.