



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

CRH BETON PROVINCIAL [BT403221]

Machine Id

VOLVO L120H 633495

Component

Front Axle

Fluid

VOLVO WB 102 (--- GAL)



RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP448200	---	---
Sample Date		Client Info		08 Jun 2024	---	---
Machine Age	hrs	Client Info		1251	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	310	---	---
Chromium	ppm	ASTM D5185(m)	>20	4	---	---
Nickel	ppm	ASTM D5185(m)	>10	1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>30	<1	---	---
Lead	ppm	ASTM D5185(m)	>50	0	---	---
Copper	ppm	ASTM D5185(m)	>120	2	---	---
Tin	ppm	ASTM D5185(m)	>20	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	31	---	---
Potassium	ppm	ASTM D5185(m)	>20	9	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	---	---
Boron	ppm	ASTM D5185(m)		120	---	---
Barium	ppm	ASTM D5185(m)		3	---	---
Molybdenum	ppm	ASTM D5185(m)		15	---	---
Manganese	ppm	ASTM D5185(m)		18	---	---
Magnesium	ppm	ASTM D5185(m)		12	---	---
Calcium	ppm	ASTM D5185(m)		4075	---	---
Phosphorus	ppm	ASTM D5185(m)		1326	---	---
Zinc	ppm	ASTM D5185(m)		1593	---	---
Sulfur	ppm	ASTM D5185(m)		3284	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		43.7	---	---

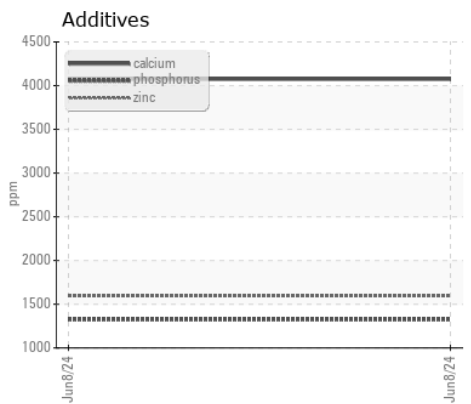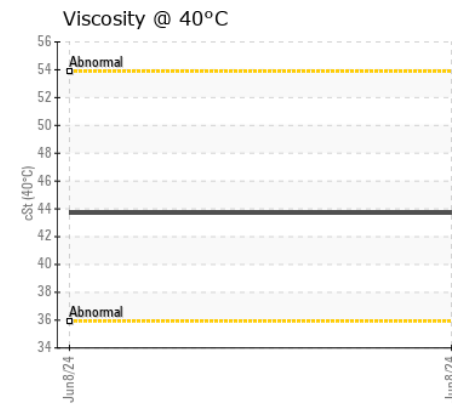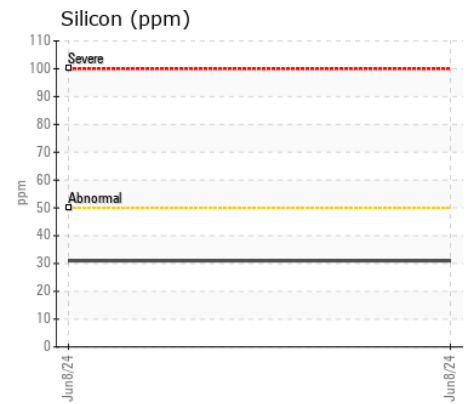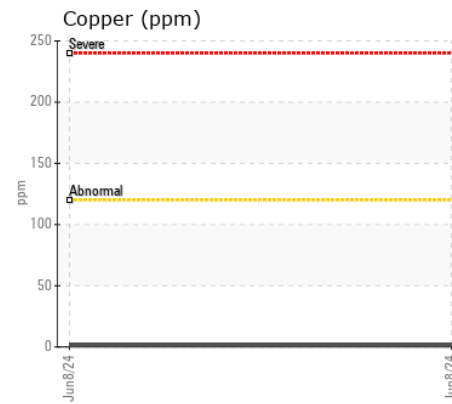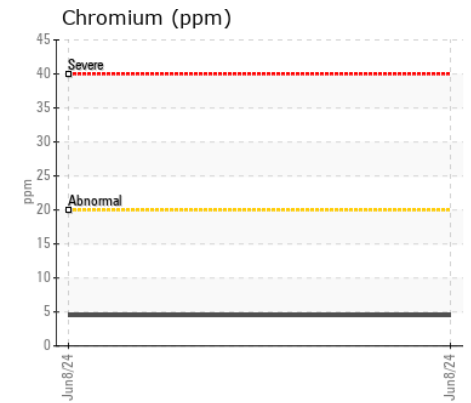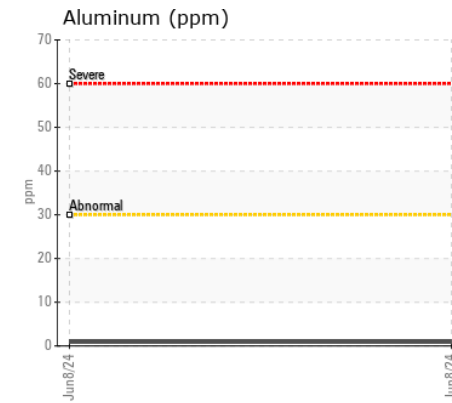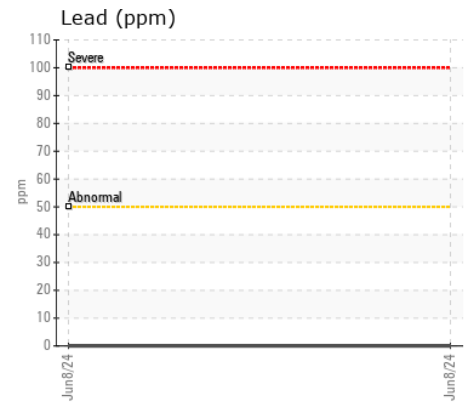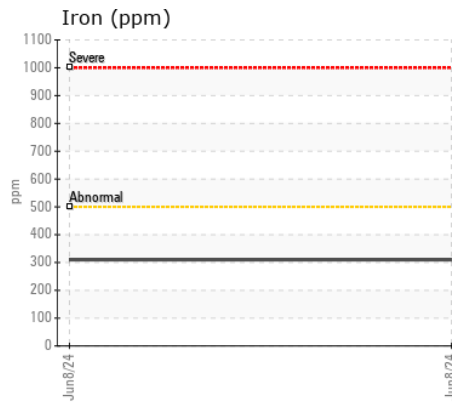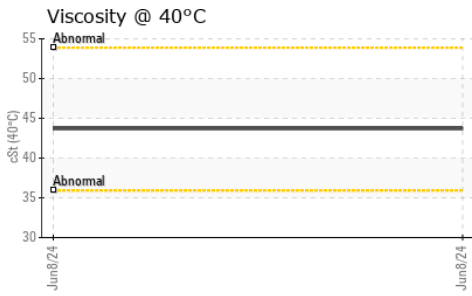

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP448200 **Received** : 13 Jun 2024
Lab Number : 02641825 **Tested** : 13 Jun 2024
Unique Number : 5799364 **Diagnosed** : 13 Jun 2024 - Wes Davis
Test Package : MOB 1

STRONGCO EQUIPMENT
 4535 LOUIS B MAYER
 LAVAL, QC
 CA H7P 6B5
 Contact: Marco Castura
 mcastura@strongco.com
 T:
 F: (450)686-0703

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.