



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**68**  
 Component  
**Diesel Engine**  
 Fluid  
**{not provided} (--- GAL)**

## RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqua que ce fluide est du SAE 15W40 Diesel Engine Oil. Veuillez confirmer la viscosité de l'huile et veuillez préciser la marque de votre prochain échantillon.

## WEAR

Les taux d'usure de tous les composants sont normaux.












## CONTAMINATION

Il n'y a aucun indice de contamination dans l'huile.

## FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>CU0023104</b>	---	---
Sample Date		Client Info		<b>13 Jun 2024</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---
Iron	ppm	ASTM D5185(m)	>165	<b>32</b>	---	---
Chromium	ppm	ASTM D5185(m)	>5	<b>2</b>	---	---
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m)	>150	<b>20</b>	---	---
Copper	ppm	ASTM D5185(m)	>90	<b>35</b>	---	---
Tin	ppm	ASTM D5185(m)	>5	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>LIGHT</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silicon	ppm	ASTM D5185(m)	>35	<b>4</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>5</b>	---	---
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	ASTM D7844*	>7.5	<b>0.9</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.4</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>24.5</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>18</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>23</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>44</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>675</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>1524</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>965</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>1167</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>2231</b>	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>19.6</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		<b>103</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		<b>13.6</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*		<b>131</b>	---	---

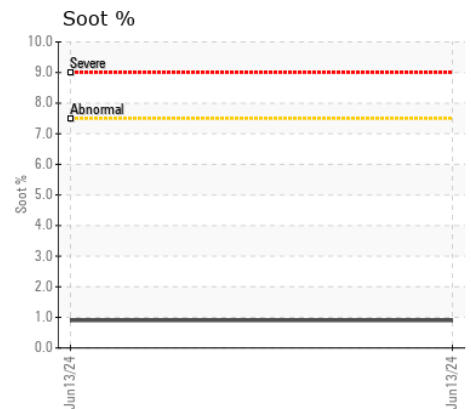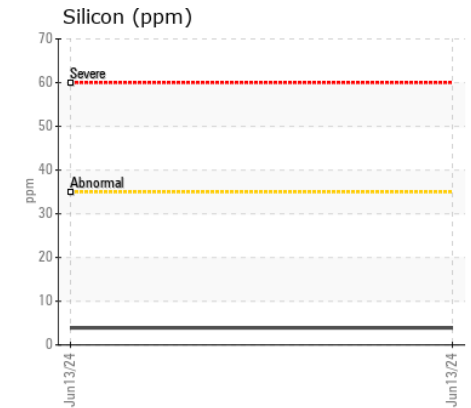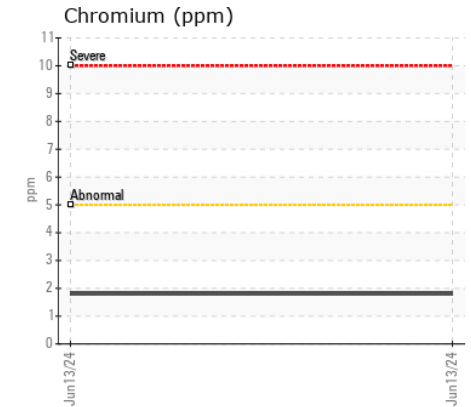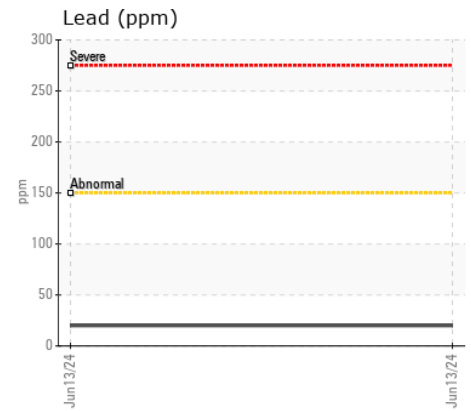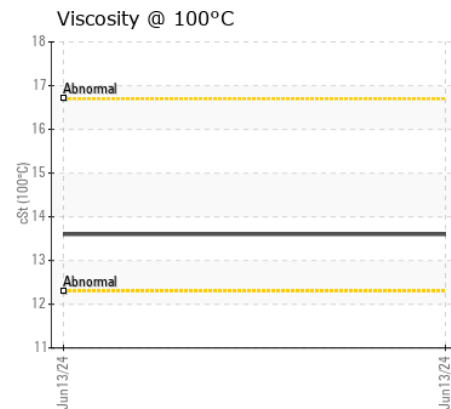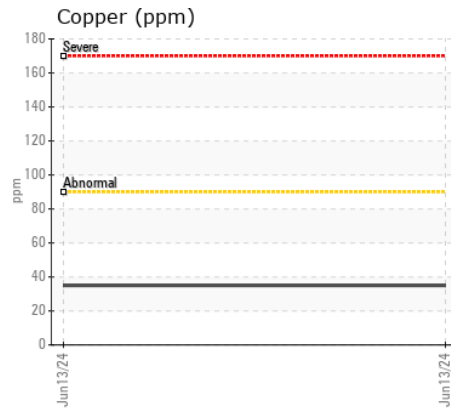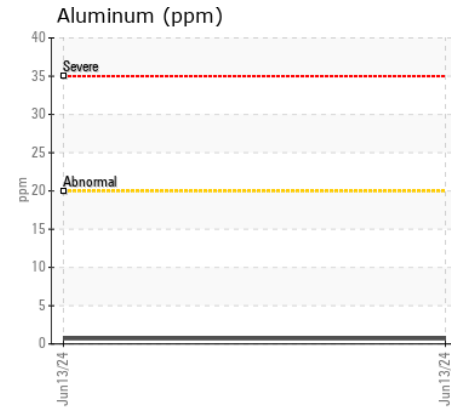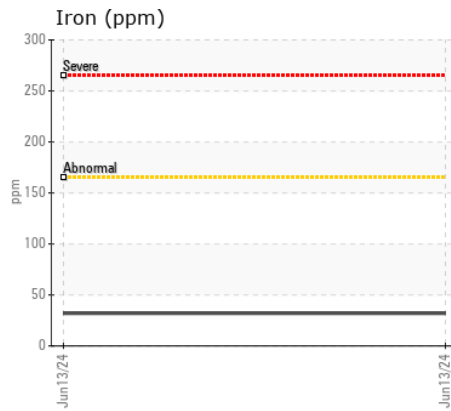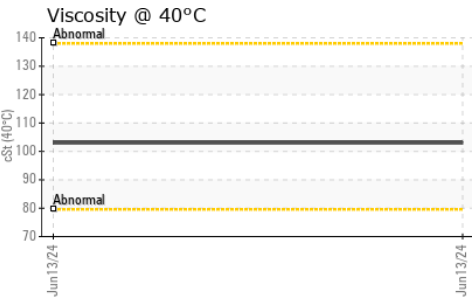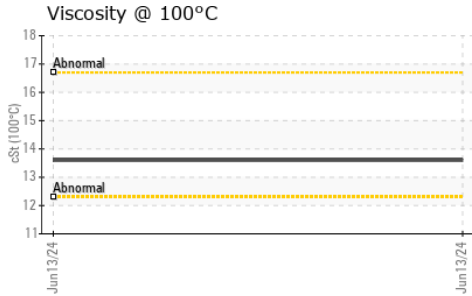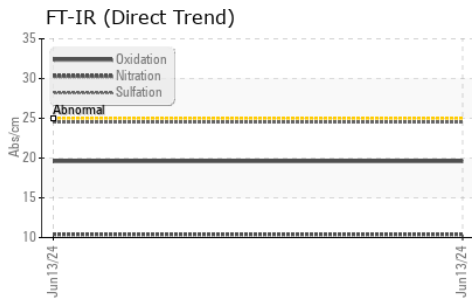

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : CU0023104  
**Lab Number** : 02641931  
**Unique Number** : 5799470  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI, Visual )

**Received** : 14 Jun 2024  
**Tested** : 17 Jun 2024  
**Diagnosed** : 17 Jun 2024 - Wes Davis

**ENTREPRISES LEDUC & FILS**  
 165 RUE DE L'EGLISE  
 ST THURIBE, QC  
 CA G0A 4H0  
 Contact: Service Manager  
 gestionleduc@gmail.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: