



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR HS8100 NOUNITLH0286660
Component
Diesel Engine
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Please note that this sample was received without a component ID. No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0286660	---	---
Sample Date		Client Info		13 Jun 2024	---	---
Machine Age	hrs	Client Info		8567	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	7	---	---
Chromium	ppm	ASTM D5185(m)	>5	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>15	1	---	---
Lead	ppm	ASTM D5185(m)	>30	1	---	---
Copper	ppm	ASTM D5185(m)	>125	3	---	---
Tin	ppm	ASTM D5185(m)	>5	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION














Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	7	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---
Fuel	%	ASTM D7593*	>5	0.7	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol	%	ASTM D7922*		0.0	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	10.8	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.1	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

Viscosity of sample indicates oil is within SAE 5W30 range, advise investigate. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		95	---	---
Boron	ppm	ASTM D5185(m)		21	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		62	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		1136	---	---
Calcium	ppm	ASTM D5185(m)		870	---	---
Phosphorus	ppm	ASTM D5185(m)		1003	---	---
Zinc	ppm	ASTM D5185(m)		1267	---	---
Sulfur	ppm	ASTM D5185(m)		2705	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	23.8	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		72.2	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		11.8	---	---
Viscosity Index (VI)	Scale	ASTM D2270*		159	---	---

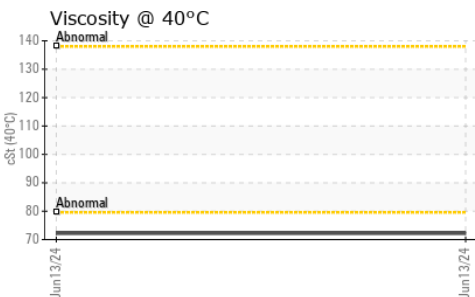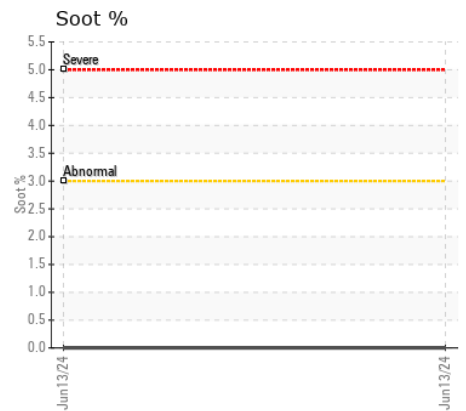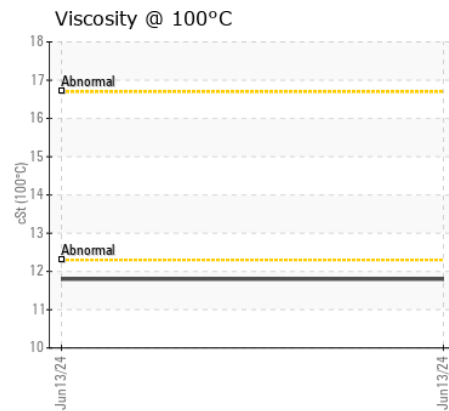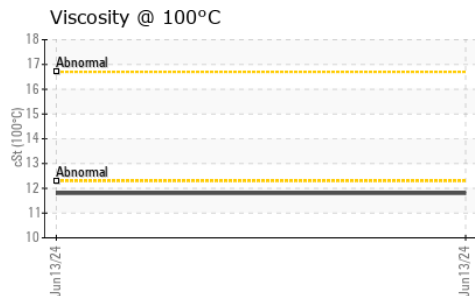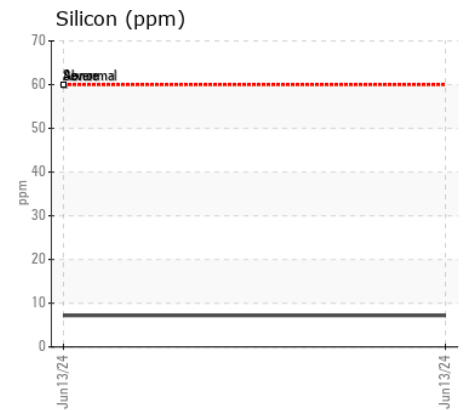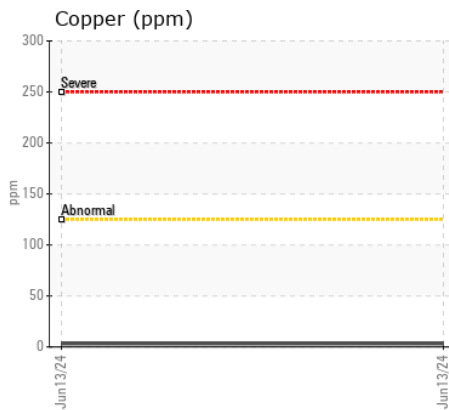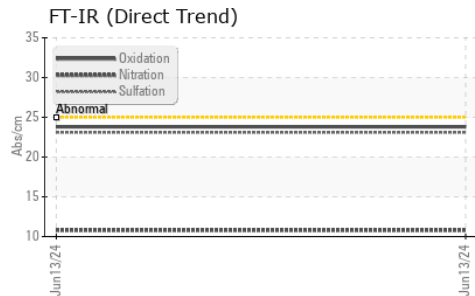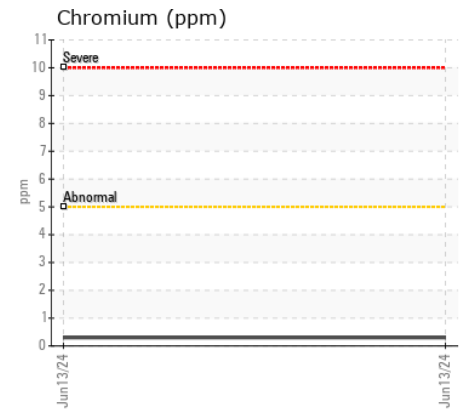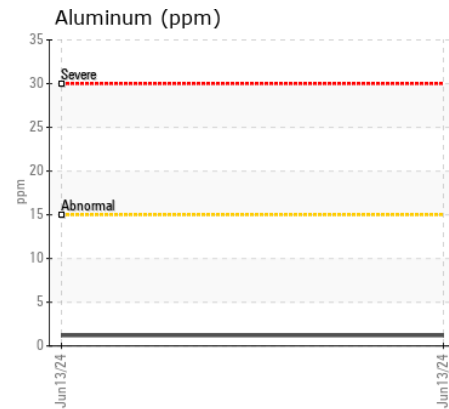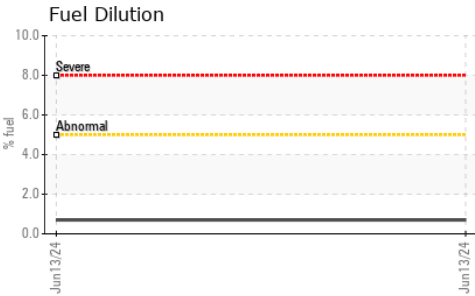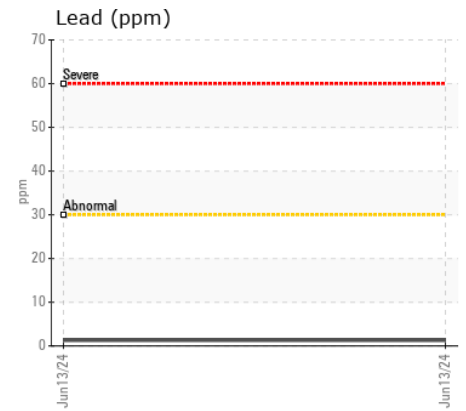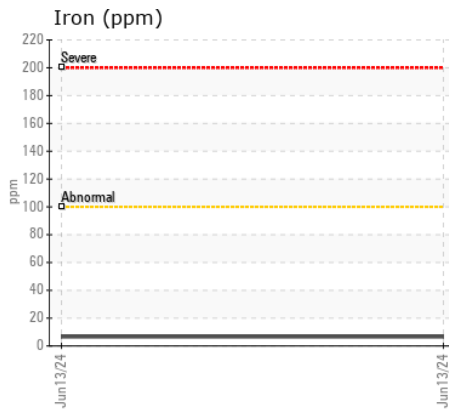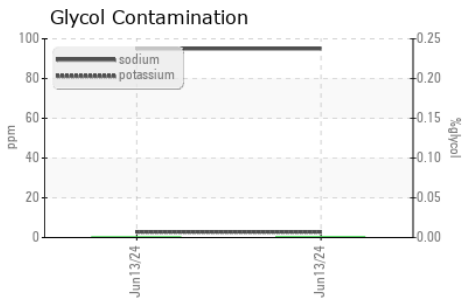

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0286660 **Received** : 17 Jun 2024
Lab Number : 02642301 **Tested** : 18 Jun 2024
Unique Number : 5799840 **Diagnosed** : 19 Jun 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: FuelDilution, Glycol, KV40, PercentFuel, VI, VisuaContact: Service Manager

Erie Drage Lines
 16 St George St.
 Aylmer, ON
 CA N5H 2M1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: