



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR PR766 24176
Component
Right Final Drive
Fluid
PETRO CANADA TRAXON 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0238155	LH0265102	---
Sample Date		Client Info		29 Mar 2024	04 Dec 2023	---
Machine Age	hrs	Client Info		6049	4477	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	67	57	---
Chromium	ppm	ASTM D5185(m)	>10	<1	<1	---
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		<1	<1	---
Aluminum	ppm	ASTM D5185(m)	>25	<1	<1	---
Lead	ppm	ASTM D5185(m)	>25	<1	<1	---
Copper	ppm	ASTM D5185(m)	>50	29	20	---
Tin	ppm	ASTM D5185(m)	>10	1	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	4	3	---
Potassium	ppm	ASTM D5185(m)	>20	<1	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	Visual*	NONE	VLITE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	1	---
Boron	ppm	ASTM D5185(m)	243	212	226	---
Barium	ppm	ASTM D5185(m)	1	1	2	---
Molybdenum	ppm	ASTM D5185(m)		0	0	---
Manganese	ppm	ASTM D5185(m)		<1	0	---
Magnesium	ppm	ASTM D5185(m)	2	<1	0	---
Calcium	ppm	ASTM D5185(m)	6	3	3	---
Phosphorus	ppm	ASTM D5185(m)	987	1374	1400	---
Zinc	ppm	ASTM D5185(m)	1	6	5	---
Sulfur	ppm	ASTM D5185(m)	21530	23729	23432	---
Visc @ 40°C	cSt	ASTM D7279(m)	141.0	94.8	95.6	---

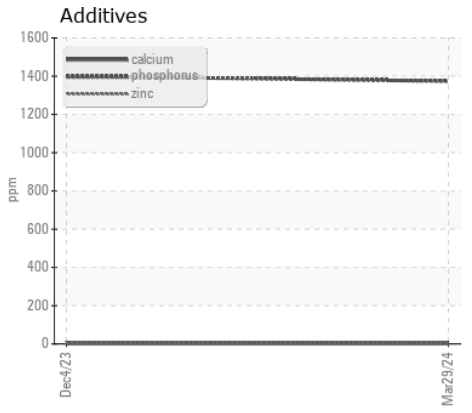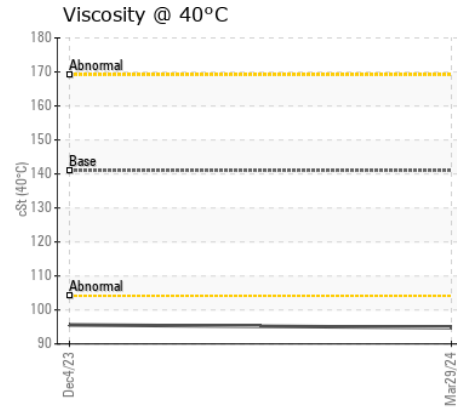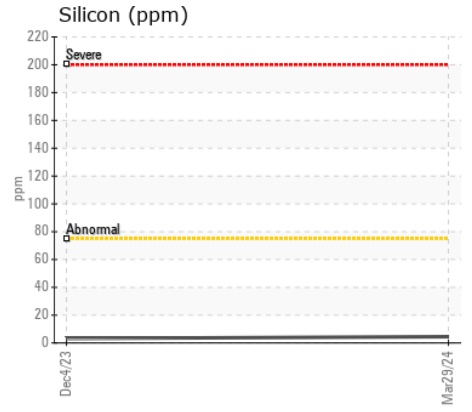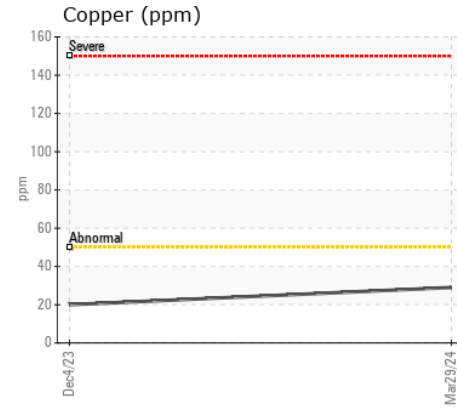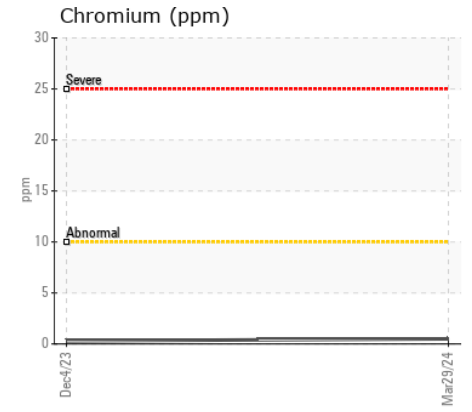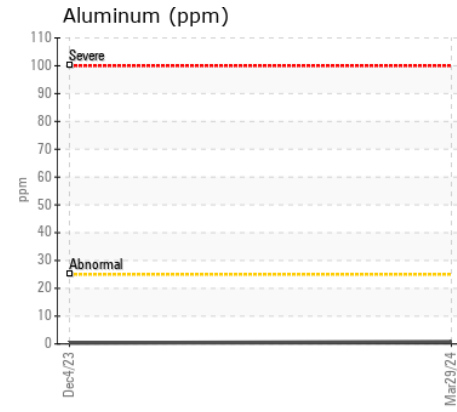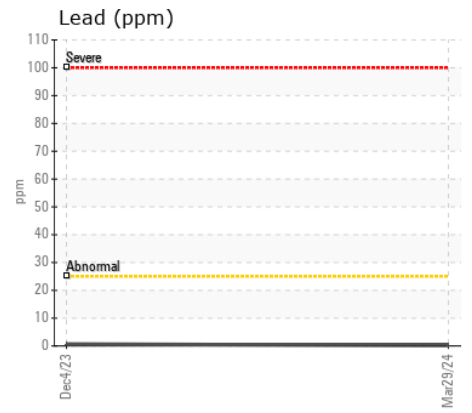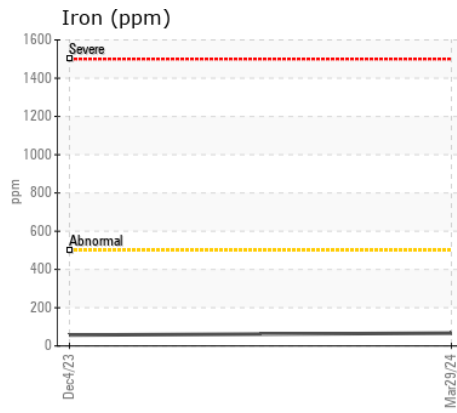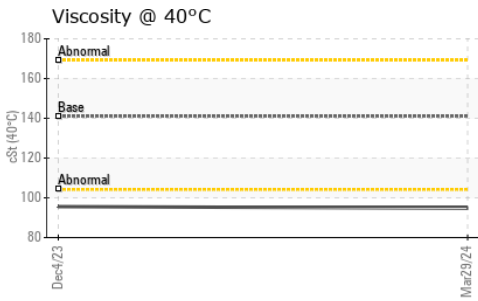

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0238155 **Received** : 17 Jun 2024
Lab Number : 02642381 **Tested** : 18 Jun 2024
Unique Number : 5799920 **Diagnosed** : 18 Jun 2024 - Wes Davis
Test Package : MOB 1

ARGONAUT GOLD
 DUBREUILVILLE MINE
 DUBREUILVILLE, ON
 CA
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: