



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
9123
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0097299	GFL0097245	GFL0064856
Sample Date		Client Info		01 Jun 2024	27 Nov 2023	18 May 2023
Machine Age	hrs	Client Info		5540	4665	3756
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>110	13	23	47
Chromium	ppm	ASTM D5185(m)	>4	1	1	3
Nickel	ppm	ASTM D5185(m)	>2	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>2	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>25	3	5	5
Lead	ppm	ASTM D5185(m)	>45	6	4	5
Copper	ppm	ASTM D5185(m)	>85	1	1	9
Tin	ppm	ASTM D5185(m)	>4	<1	<1	2
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	5	6	8
Potassium	ppm	ASTM D5185(m)	>20	2	6	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.1	0.8	1.5
Nitration	Abs/cm	ASTM D7624*	>20	8.1	8.3	10.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.9	21.4	23.7
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	4	4
Boron	ppm	ASTM D5185(m)	0	4	6	5
Barium	ppm	ASTM D5185(m)	0	<1	<1	0
Molybdenum	ppm	ASTM D5185(m)	60	61	60	63
Manganese	ppm	ASTM D5185(m)	0	<1	0	<1
Magnesium	ppm	ASTM D5185(m)	1010	994	988	1039
Calcium	ppm	ASTM D5185(m)	1070	1119	1058	1138
Phosphorus	ppm	ASTM D5185(m)	1150	1033	1014	1131
Zinc	ppm	ASTM D5185(m)	1270	1240	1202	1270
Sulfur	ppm	ASTM D5185(m)	2060	2515	2465	2511
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.1	16.5	17.8
Visc @ 40°C	cSt	ASTM D7279(m)	113.9	98.9	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.5	13.6	13.9
Viscosity Index (VI)	Scale	ASTM D2270*	142	136	---	---

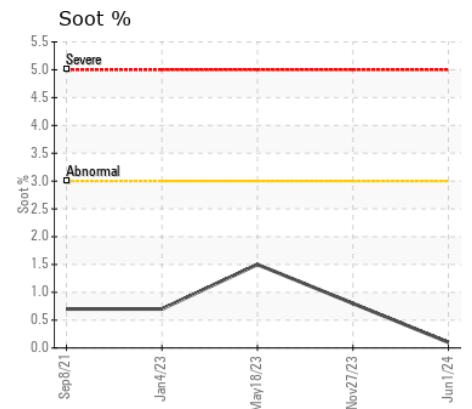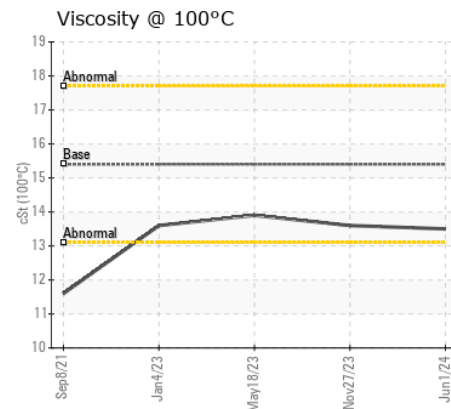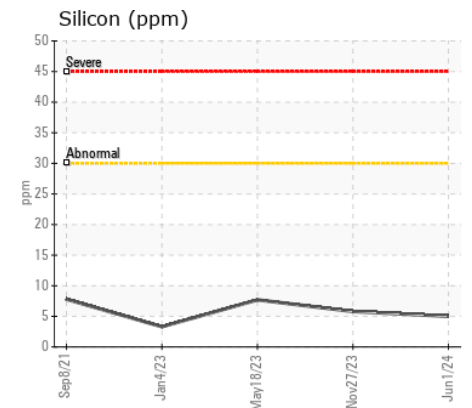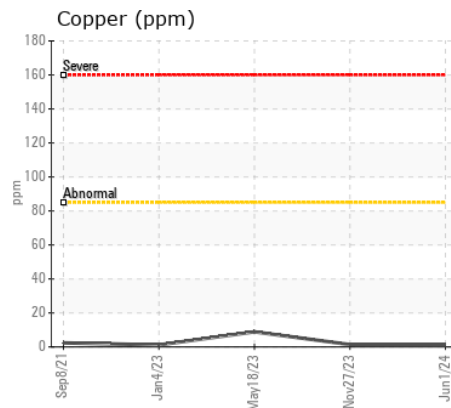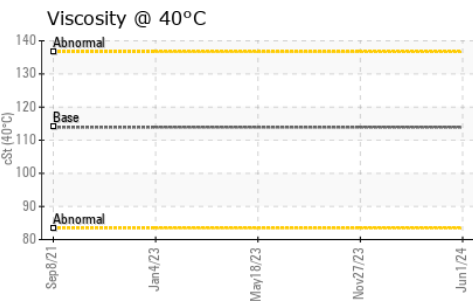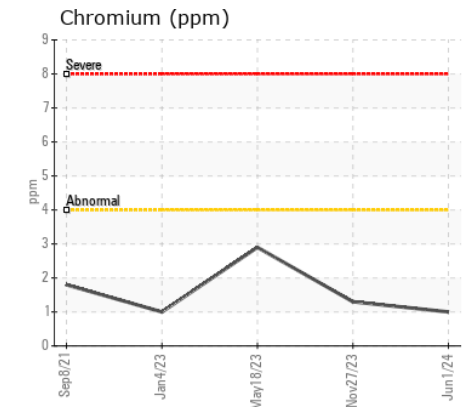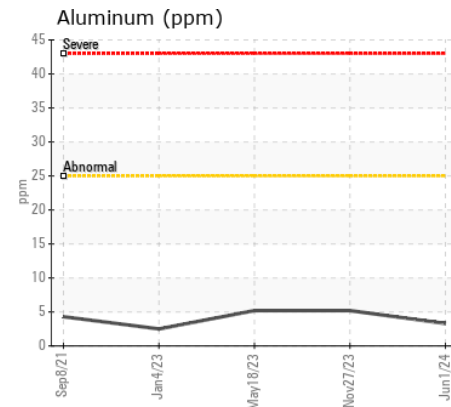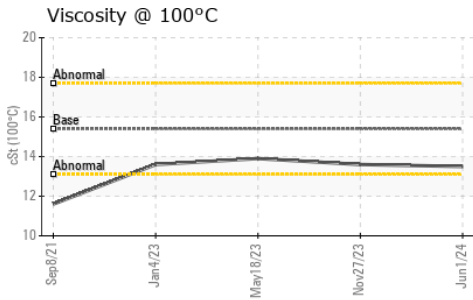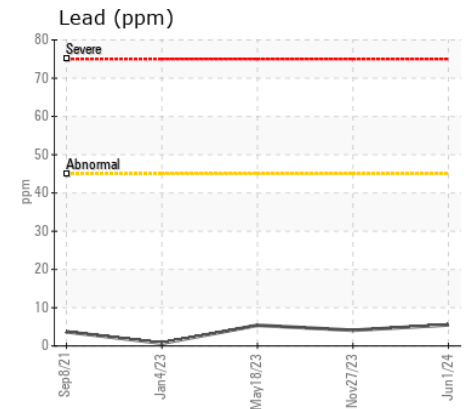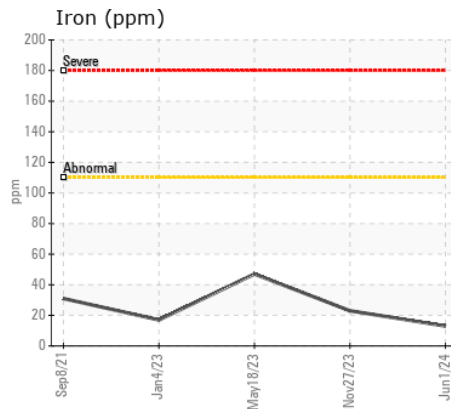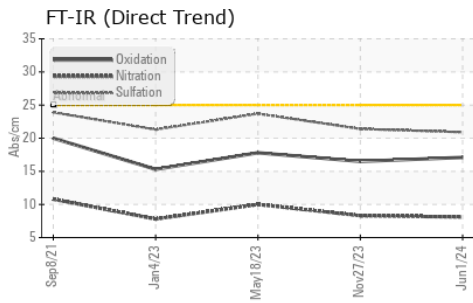

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0097299 **Received** : 18 Jun 2024
Lab Number : 02642544 **Tested** : 18 Jun 2024
Unique Number : 5800083 **Diagnosed** : 18 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV40, VI, Visual)

GFL Environmental - 558 - Grand Prairie
 8003 - 110 Street,
 Grande Prairie, AB
 CA T8W 6T2
 Contact: Tristen Ebach
 tebach@gflenv.com
 T: (780)532-3086
 F: (780)513-5217

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.