



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINANTS	NORMAL
OIL CONDITION	NORMAL



Machine Id
TOYOTA 071728
Component
Front Gasoline Engine
Fluid
SAE 0W20 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

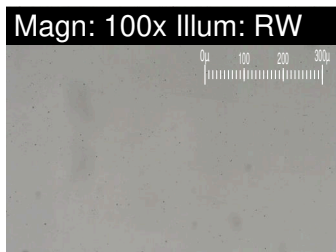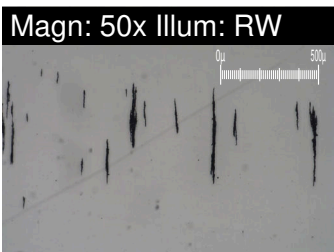

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PP	---	---
Sample Date		Client Info		07 Jun 2024	---	---
Machine Age	kms	Client Info		30789	---	---
Oil Age	kms	Client Info		4911	---	---
Filter Age	kms	Client Info		4911	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---
PQ		ASTM D8184*		0	---	---
Iron	ppm	ASTM D5185(m)	>150	6	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>2	1	---	---
Aluminum	ppm	ASTM D5185(m)	>40	2	---	---
Lead	ppm	ASTM D5185(m)	>50	0	---	---
Copper	ppm	ASTM D5185(m)	>155	3	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Large Particles		DR-Ferr*		6.6	---	---
Small Particles		DR-Ferr*		4.8	---	---
Total Particles		DR-Ferr*	>---	11.4	---	---
Large Particles Percentage	%	DR-Ferr*		15.8	---	---
Severity Index		DR-Ferr*		12	---	---
Ferrous Rubbing	Scale 0-10	ASTM D7684*		3		
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		1		
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*		1		
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				

CONTAMINANTS









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	21	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	9.0	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.0	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1		
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1		

OIL CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)	>400	2	---	---
Boron	ppm	ASTM D5185(m)		18	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		72	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		392	---	---
Calcium	ppm	ASTM D5185(m)		1052	---	---
Phosphorus	ppm	ASTM D5185(m)		581	---	---
Zinc	ppm	ASTM D5185(m)		661	---	---
Sulfur	ppm	ASTM D5185(m)		1647	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	10.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*		5.51	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	8.3	7.1	---	---
Lubricant Degradation	Scale 0-10	ASTM D7684*				

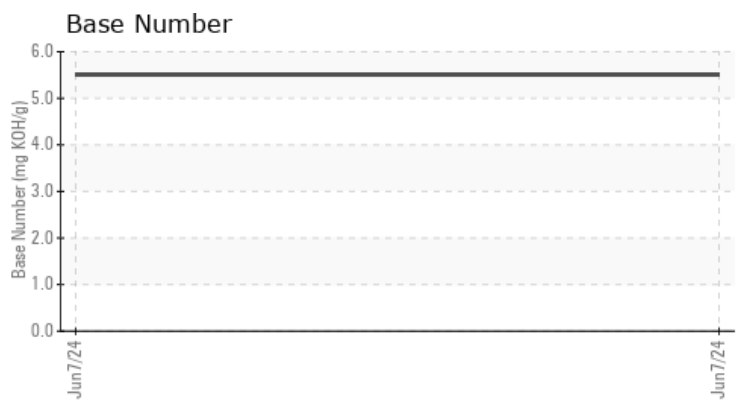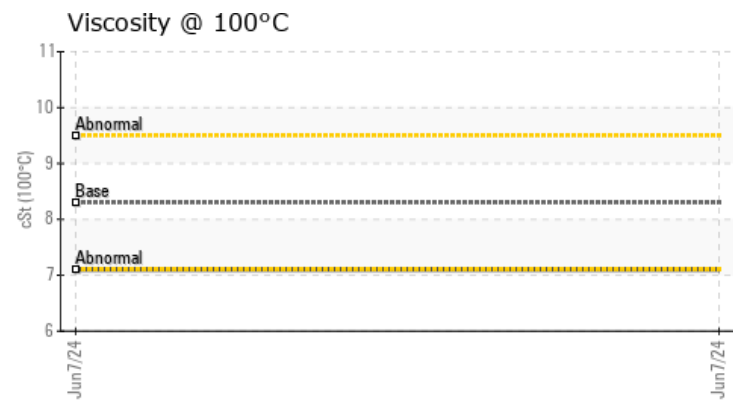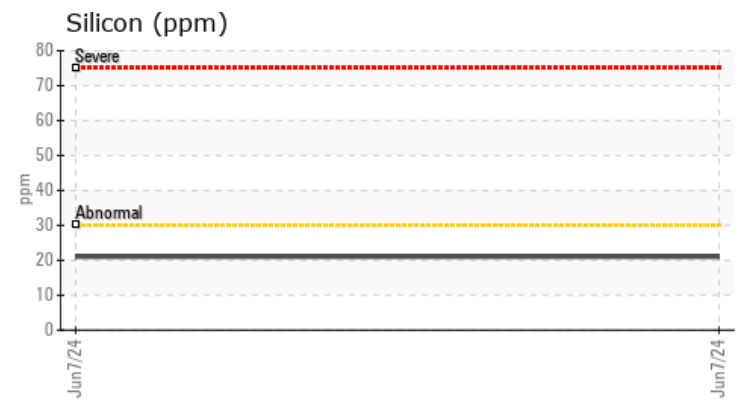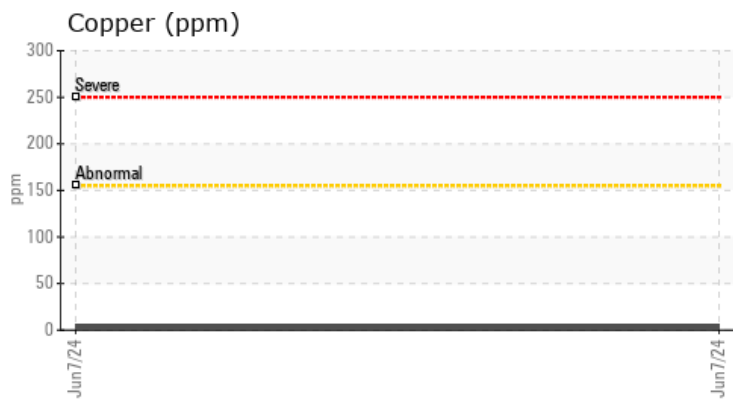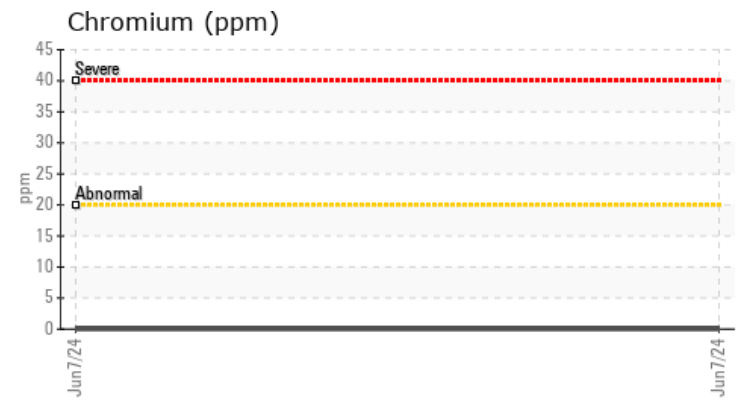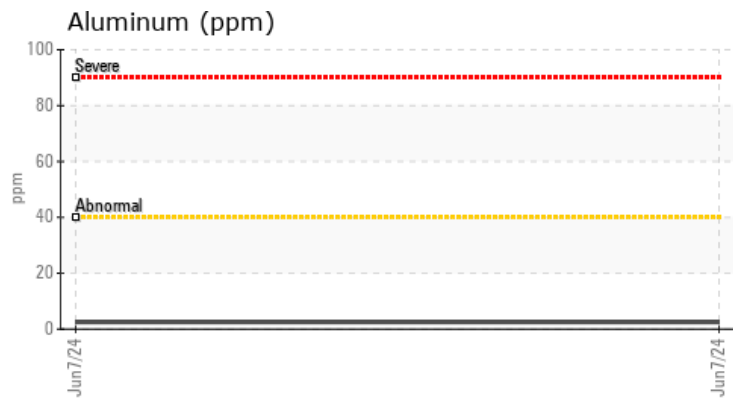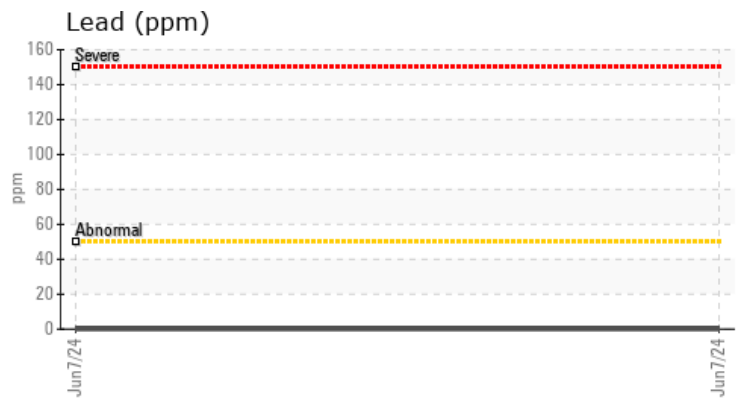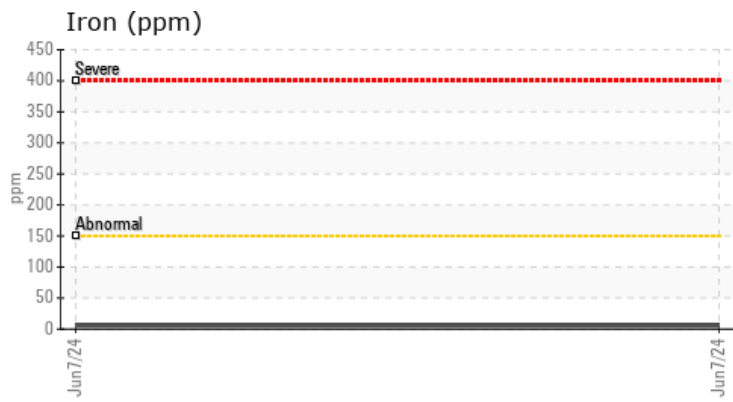

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PP
Lab Number : 02642573
Unique Number : 5800112
Test Package : MOB 3

Received : 18 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 19 Jun 2024 - Kevin Marson

MERWAIS SHINWARI
 3 - 5730 RUE CHEVALIER
 BROSSARD, QC
 CA J4Z 0E6
 Contact: Merwais Shinwari
 merwais.shinwari@gmail.com
 T: (514)885-5887
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

This page left intentionally blank