



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CLAAS 830 JAGUAR 49702272
 Component
Diesel Engine
 Fluid
CLAAS CK 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0512777	---	---
Sample Date		Client Info		14 Jun 2024	---	---
Machine Age	hrs	Client Info		4100	---	---
Oil Age	hrs	Client Info		300	---	---
Filter Age	hrs	Client Info		300	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

We have assumed that the oil was taken hot, according to the sampling instructions. All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	65	---	---
Chromium	ppm	ASTM D5185(m)	>20	1	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	3	---	---
Lead	ppm	ASTM D5185(m)	>40	5	---	---
Copper	ppm	ASTM D5185(m)	>330	3	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	8	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol	%	ASTM D7922*		0.0	---	---
Soot %	%	ASTM D7844*	>3	0.4	---	---
Nitration	Abs/cm	ASTM D7624*	>20	15.7	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	30.0	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	---	---
Boron	ppm	ASTM D5185(m)		123	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		2	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		490	---	---
Calcium	ppm	ASTM D5185(m)		3079	---	---
Phosphorus	ppm	ASTM D5185(m)		1201	---	---
Zinc	ppm	ASTM D5185(m)		1389	---	---
Sulfur	ppm	ASTM D5185(m)		3085	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	26.7	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		106	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		14.2	---	---
Viscosity Index (VI)	Scale	ASTM D2270*		136	---	---

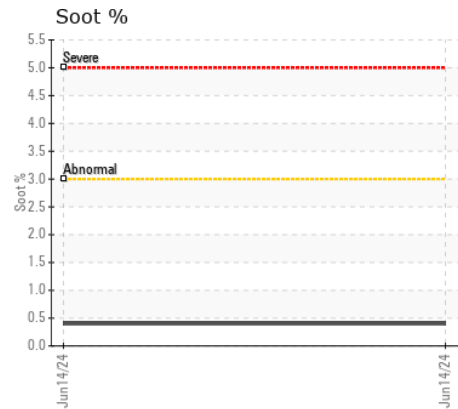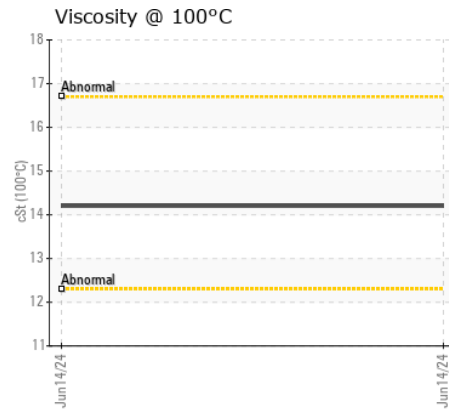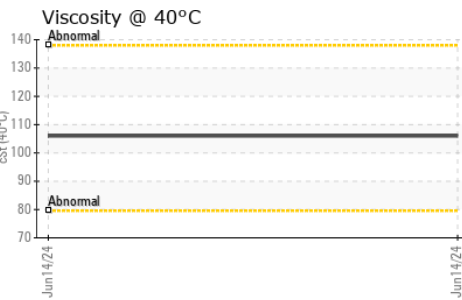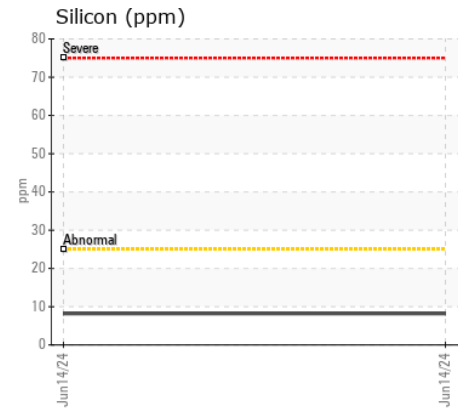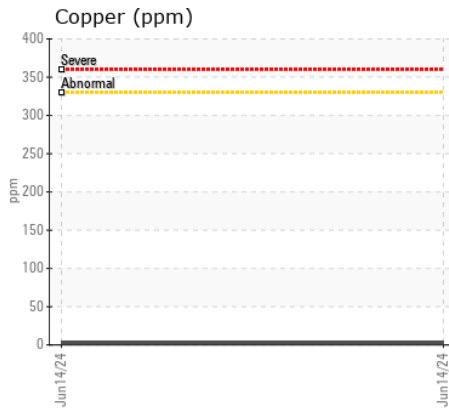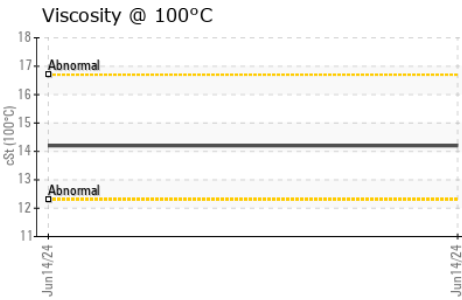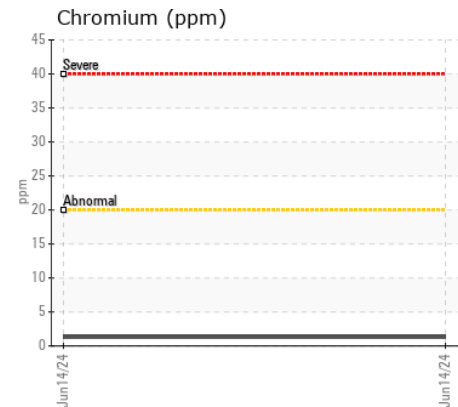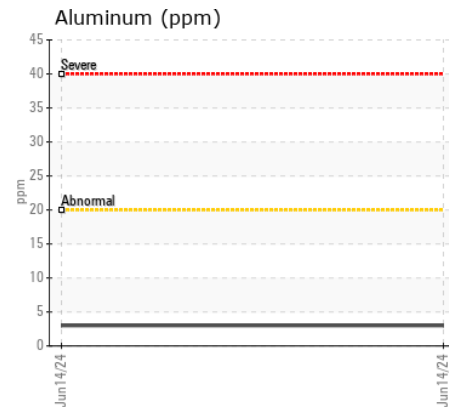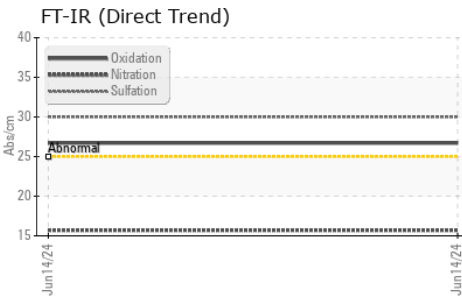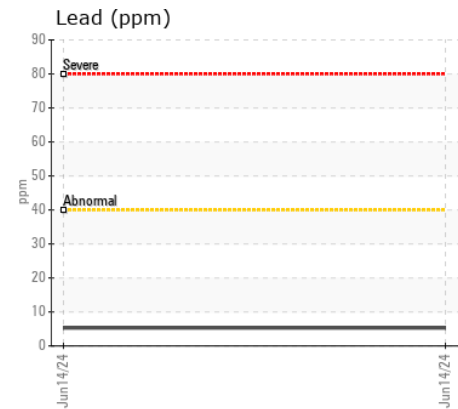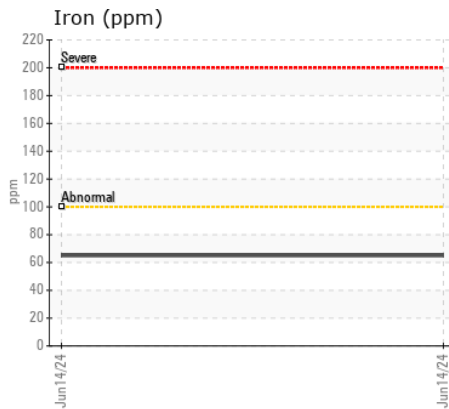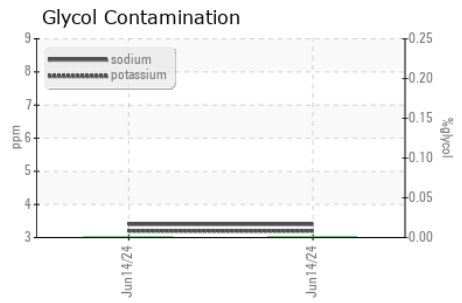

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0512777
Lab Number : 02642763
Unique Number : 5800302
Test Package : MOB 1 (Additional Tests: BottomAnalysis, FILTERPATCH, GLYCOL, KV40, VI, VisCo)
Received : 19 Jun 2024
Tested : 21 Jun 2024
Diagnosed : 21 Jun 2024 - Kevin Marson

SUNOVA IMPLEMENT LTD
 R.R. #1, 196679 19TH LINE
 LAKESIDE, ON
 CA N0M 2G0
 Contact: Gord Russell
 PARTS@SUNOVA.CA
 T: (519)349-2075
 F: (519)349-2028

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.