



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
ACTION AUTO [8000408262]
Machine Id
VOLVO L90H 627261
Component
Diesel Engine
Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP448046	---	---
Sample Date		Client Info		14 Jun 2024	---	---
Machine Age	hrs	Client Info		508	---	---
Oil Age	hrs	Client Info		508	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a components first oil change.

Iron	ppm	ASTM D5185(m)	>100	23	---	---
Chromium	ppm	ASTM D5185(m)	>10	2	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>10	8	---	---
Lead	ppm	ASTM D5185(m)	>20	1	---	---
Copper	ppm	ASTM D5185(m)	>15	8	---	---
Tin	ppm	ASTM D5185(m)	>10	2	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	15	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Fuel		WC Method	>6.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0.1	---	---
Nitration	Abs/cm	ASTM D7624*	>20	7.0	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.4	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	---	---
Boron	ppm	ASTM D5185(m)	2.5	47	---	---
Barium	ppm	ASTM D5185(m)	0.0	4	---	---
Molybdenum	ppm	ASTM D5185(m)	0.7	37	---	---
Manganese	ppm	ASTM D5185(m)	0.0	5	---	---
Magnesium	ppm	ASTM D5185(m)	256	533	---	---
Calcium	ppm	ASTM D5185(m)	2057	1581	---	---
Phosphorus	ppm	ASTM D5185(m)	935	920	---	---
Zinc	ppm	ASTM D5185(m)	1223	1047	---	---
Sulfur	ppm	ASTM D5185(m)	4079	2821	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	18.2	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	113	92.2	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	12.4	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	138	129	---	---

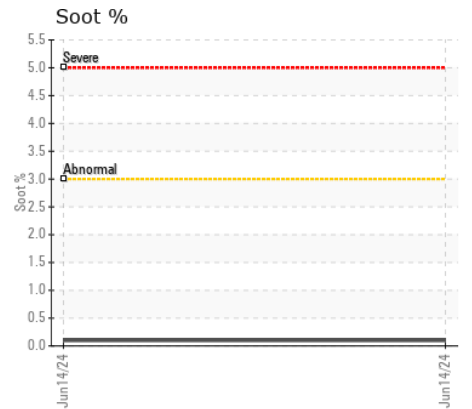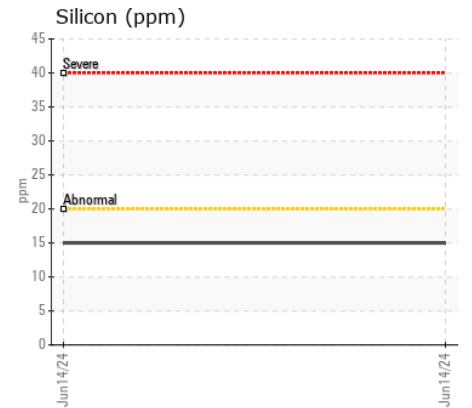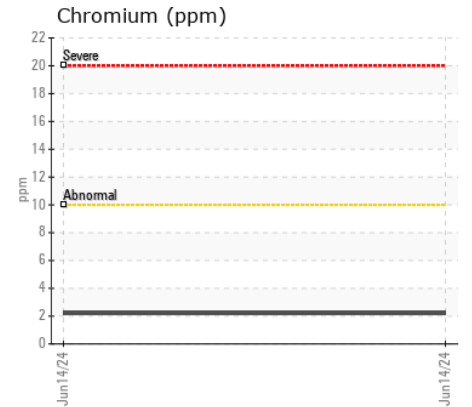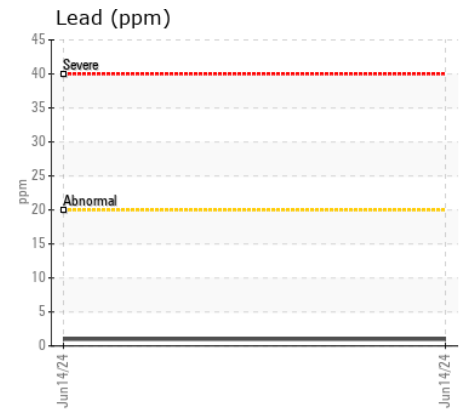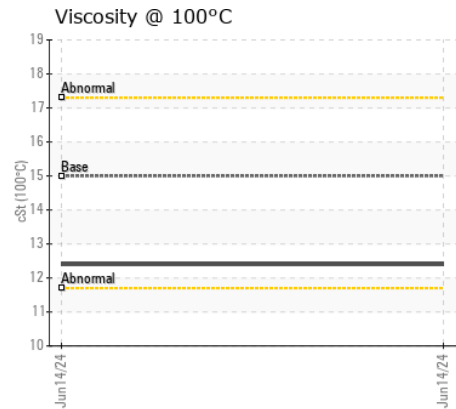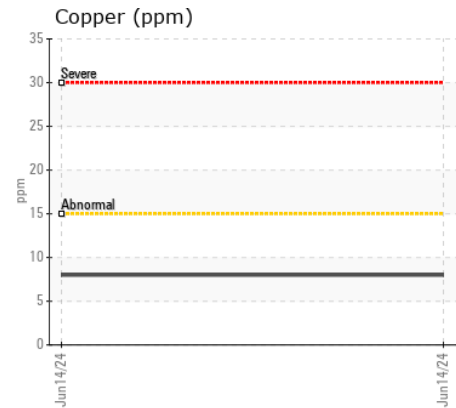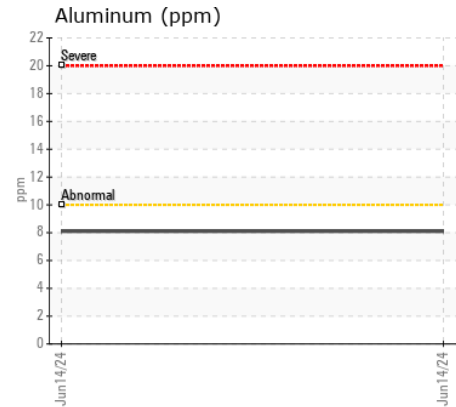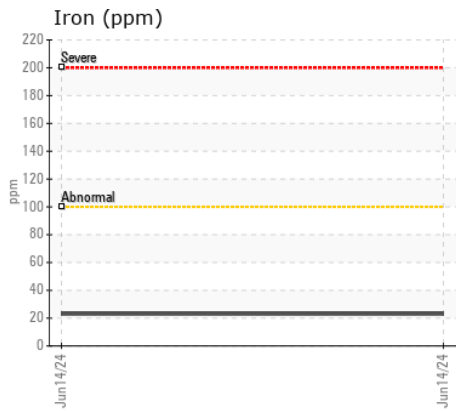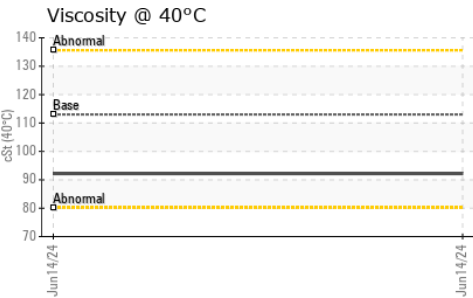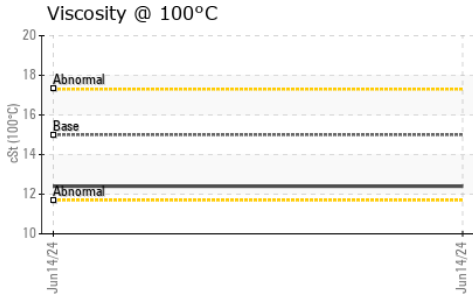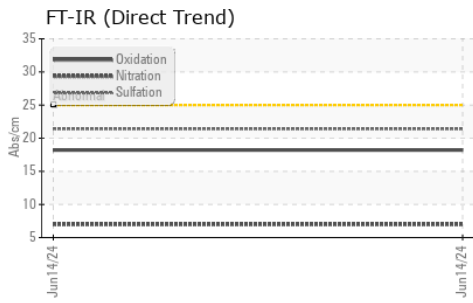

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP448046 **Received** : 19 Jun 2024
Lab Number : 02642767 **Tested** : 20 Jun 2024
Unique Number : 5800306 **Diagnosed** : 20 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV40, VI, Visual)

STRONGCO EQUIPMENT
 4535 LOUIS B MAYER
 LAVAL, QC
 CA H7P 6B5
 Contact: Marco Castura
 mcastura@strongco.com
 T:
 F: (450)686-0703

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.