



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A35G 627114
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 10W30. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP260969	---	---
Sample Date		Client Info		16 May 2024	---	---
Machine Age	hrs	Client Info		568	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	16	---	---
Chromium	ppm	ASTM D5185(m)	>20	2	---	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	9	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	2	---	---
Tin	ppm	ASTM D5185(m)	>15	1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION













Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	8	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Fuel	%	ASTM D7593*	>6.0	0.3	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	6.9	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.9	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	---	---
Boron	ppm	ASTM D5185(m)	250	44	---	---
Barium	ppm	ASTM D5185(m)	10	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	100	37	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)	450	448	---	---
Calcium	ppm	ASTM D5185(m)	3000	1550	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	868	---	---
Zinc	ppm	ASTM D5185(m)	1350	1009	---	---
Sulfur	ppm	ASTM D5185(m)	4250	2332	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.1	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	73	88.6	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	12.1	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	138	129	---	---

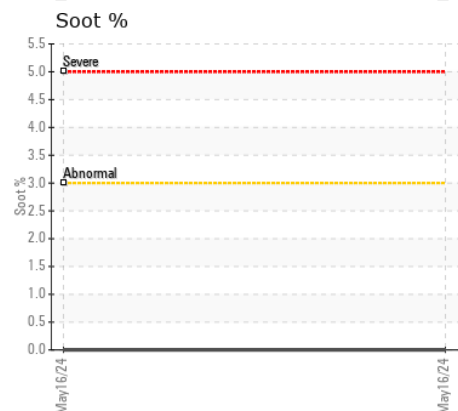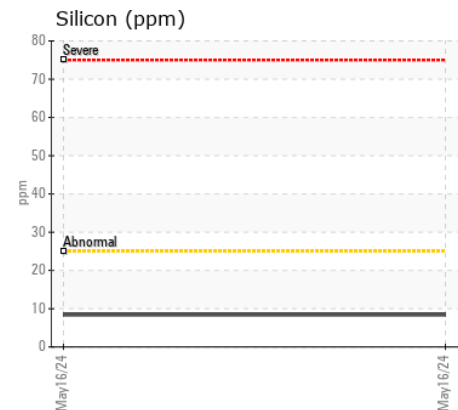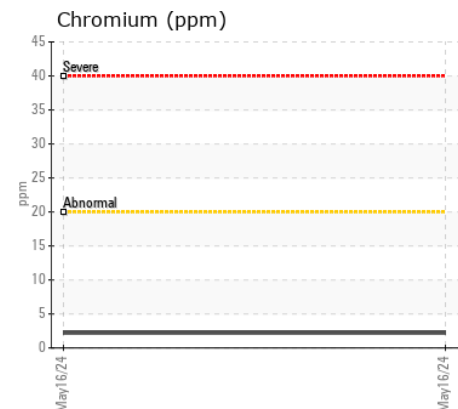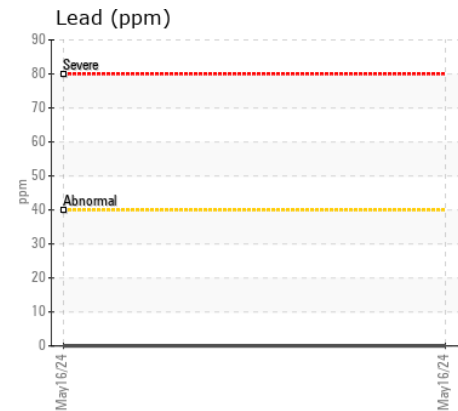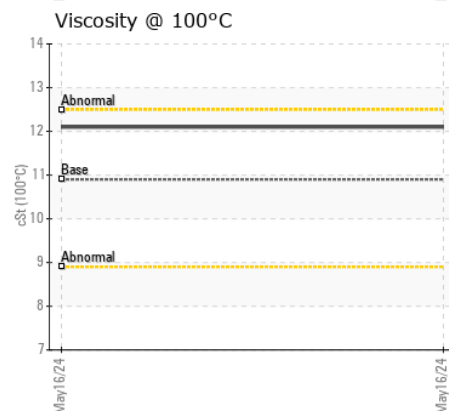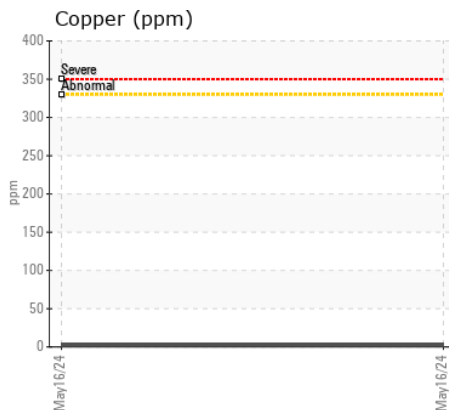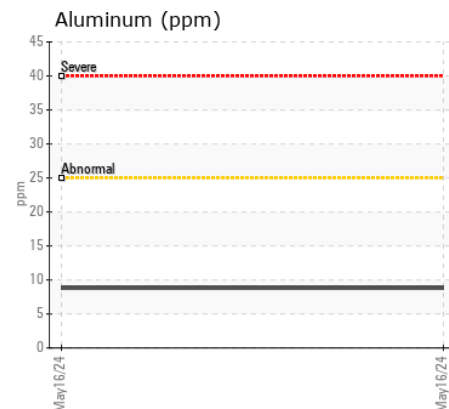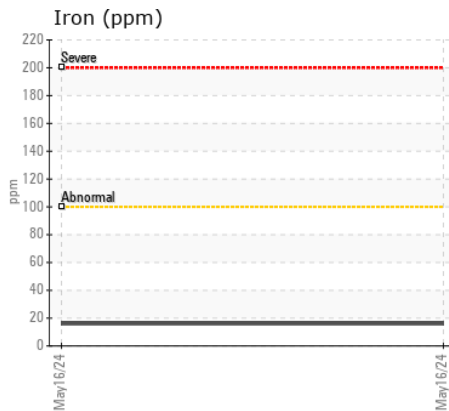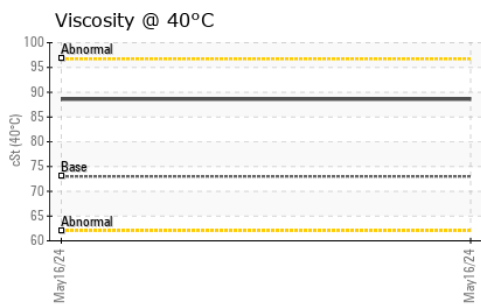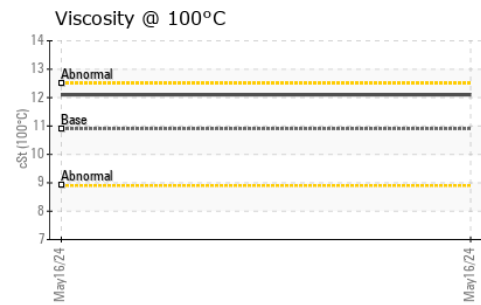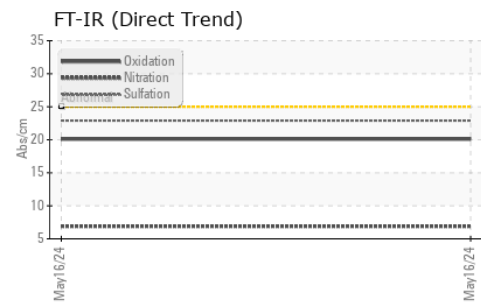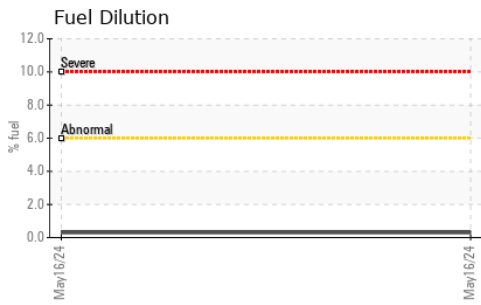

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP260969 **Received** : 19 Jun 2024
Lab Number : 02642784 **Tested** : 20 Jun 2024
Unique Number : 5800323 **Diagnosed** : 20 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: FuelDilution, KV40, PercentFuel, VI, Visual)

STRONGCO EQUIPMENT INC. - MOUNT PEARL
 54 GLENCO DRIVE
 MOUNT PEARL, NL
 CA A1N 4S9
 Contact: Jeff Hillier
 jhillier@strongco.com
 T: (709)747-4026
 F: (709)747-4059

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.