



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[25101]**  
 Machine Id  
**20-95**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0941319</b>	WC0876525	WC0744975
Sample Date		Client Info		<b>18 Jun 2024</b>	11 Dec 2023	24 Aug 2023
Machine Age	kms	Client Info		<b>103160</b>	94254	84324
Oil Age	kms	Client Info		<b>0</b>	0	0
Filter Age	kms	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	<b>10</b>	11	11
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>5</b>	6	8
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>330	<b>7</b>	10	14
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>5</b>	6	6
Potassium	ppm	ASTM D5185(m)	>20	<b>5</b>	7	11
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.2</b>	8.7	8.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>23.2</b>	22.8	24.1
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>118	<b>2</b>	3	3
Boron	ppm	ASTM D5185(m)		<b>33</b>	27	25
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>40</b>	43	42
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185(m)		<b>493</b>	513	547
Calcium	ppm	ASTM D5185(m)		<b>1674</b>	1702	1689
Phosphorus	ppm	ASTM D5185(m)		<b>705</b>	706	781
Zinc	ppm	ASTM D5185(m)		<b>869</b>	895	908
Sulfur	ppm	ASTM D5185(m)		<b>1955</b>	1896	2020
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>22.2</b>	23.0	21.9
Visc @ 100°C	cSt	ASTM D7279(m)		<b>14.2</b>	14.1	13.8

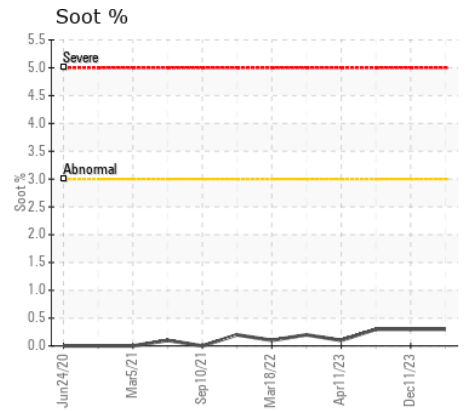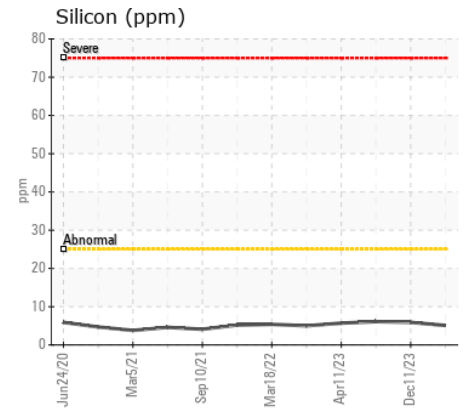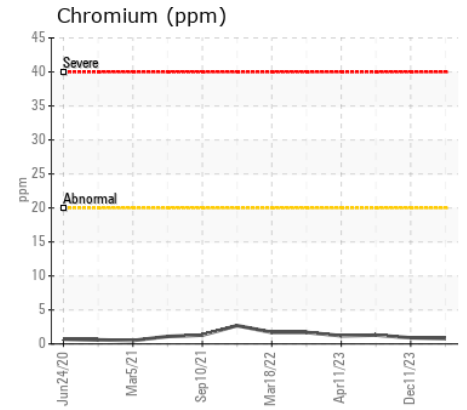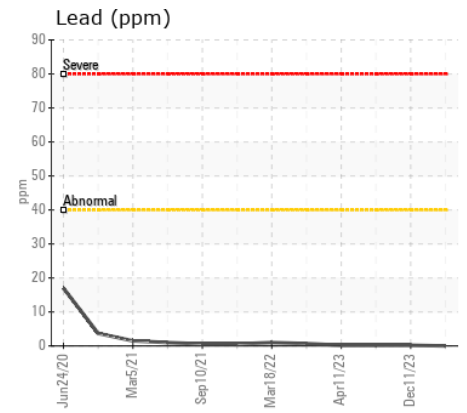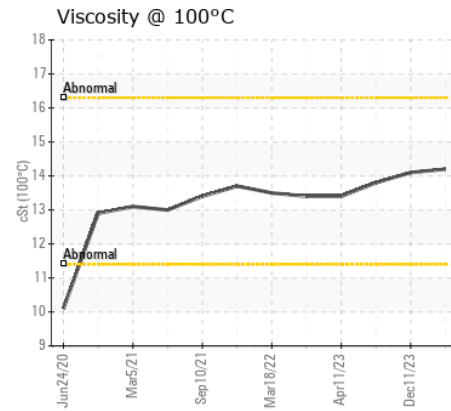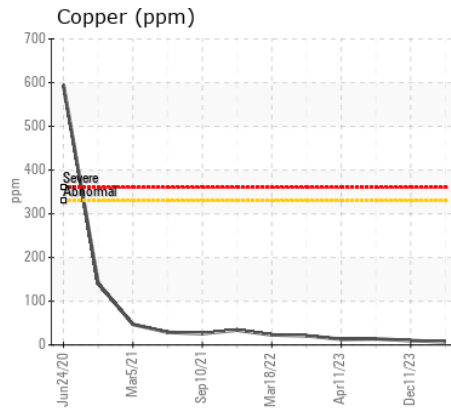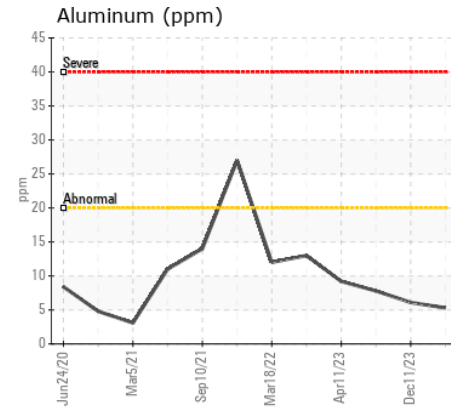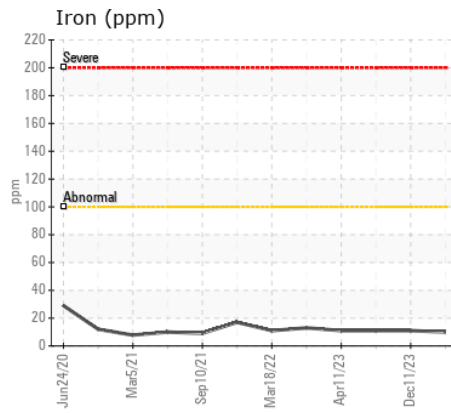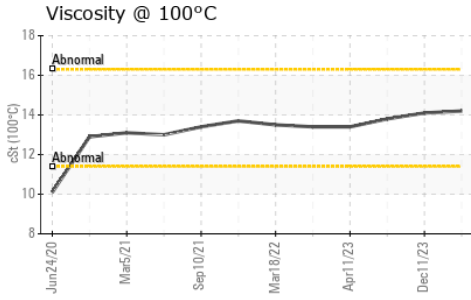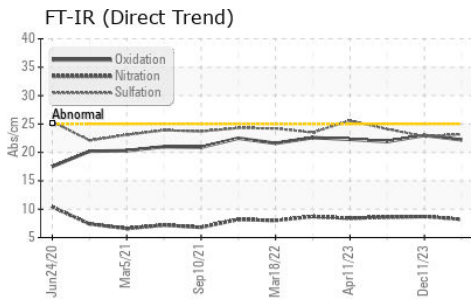

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0941319 **Received** : 20 Jun 2024  
**Lab Number** : 02643076 **Tested** : 20 Jun 2024  
**Unique Number** : 5800615 **Diagnosed** : 20 Jun 2024 - Wes Davis  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**OX FLEET CARE**  
 466 HIGHWAY 52  
 DUNDAS, ON  
 CA L9H 5E2  
 Contact: Robert Hughes  
 robert.hughes@ox-equipment.com  
 T: (289)683-6037  
 F: