



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
GFL207
Machine Id
800024
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (20 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0118546	GFL0110689	GFL0102713
Sample Date		Client Info		17 Jun 2024	01 Apr 2024	09 Jan 2024
Machine Age	hrs	Client Info		18640	18036	17470
Oil Age	hrs	Client Info		600	0	0
Filter Age	hrs	Client Info		600	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>75	16	33	25
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>15	<1	2	3
Lead	ppm	ASTM D5185(m)	>25	0	0	<1
Copper	ppm	ASTM D5185(m)	>100	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	8	6
Potassium	ppm	ASTM D5185(m)	>20	<1	2	0
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>6	0.3	0.7	0.6
Nitration	Abs/cm	ASTM D7624*	>20	9.3	10.8	10.7
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.3	22.0	21.9
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	9	6
Boron	ppm	ASTM D5185(m)	0	1	3	2
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	54	61	58
Manganese	ppm	ASTM D5185(m)	0	<1	0	0
Magnesium	ppm	ASTM D5185(m)	1010	886	992	959
Calcium	ppm	ASTM D5185(m)	1070	961	1060	1068
Phosphorus	ppm	ASTM D5185(m)	1150	914	1001	1008
Zinc	ppm	ASTM D5185(m)	1270	1125	1206	1169
Sulfur	ppm	ASTM D5185(m)	2060	2318	2346	2519
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.1	19.5	19.8
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.1	14.3	13.8

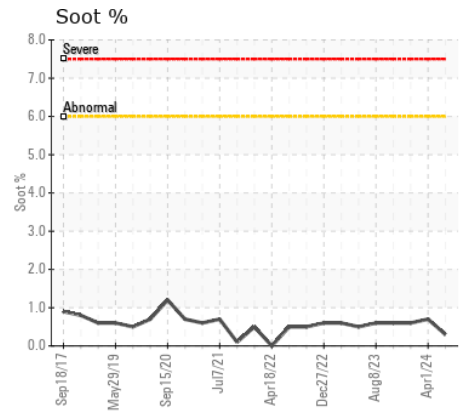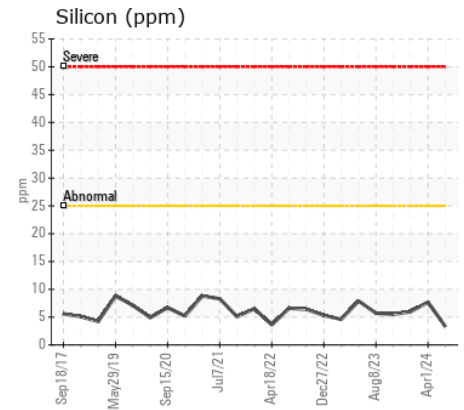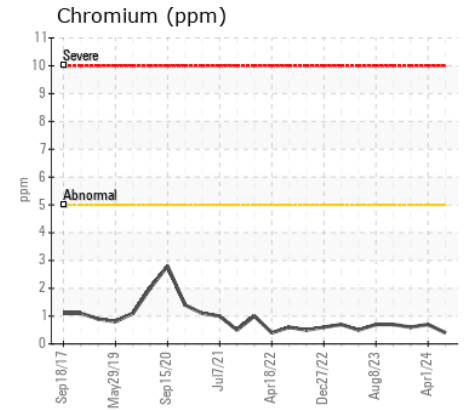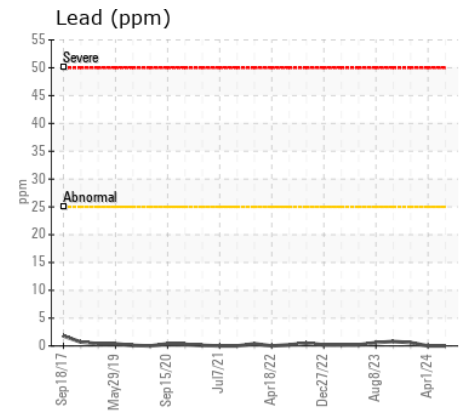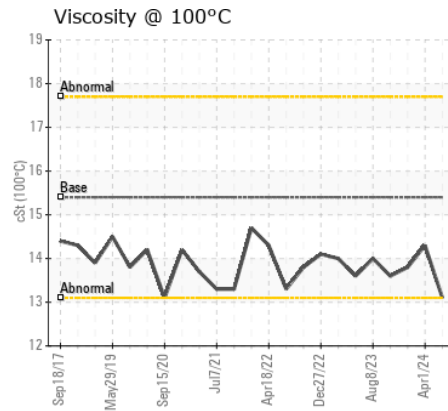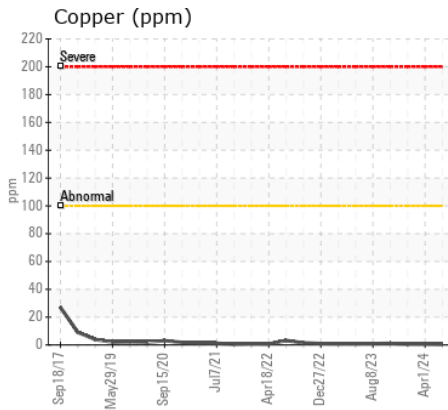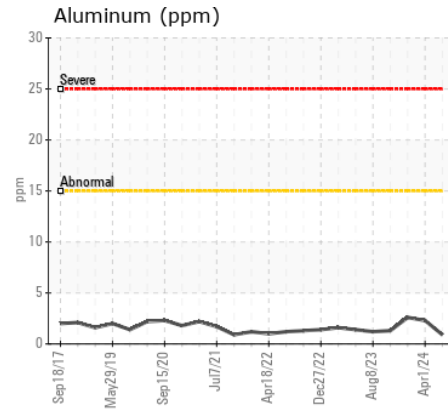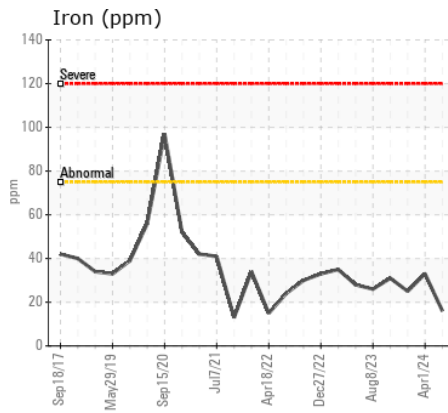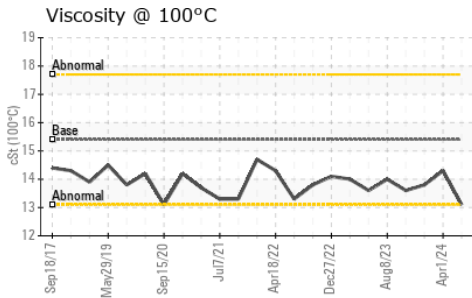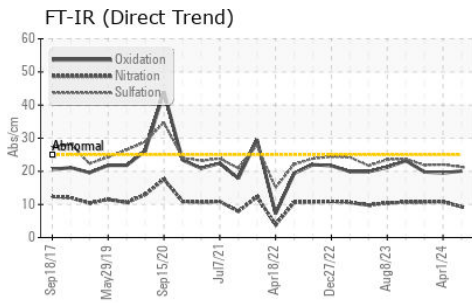

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0118546 **Received** : 20 Jun 2024
Lab Number : 02643172 **Tested** : 20 Jun 2024
Unique Number : 5800711 **Diagnosed** : 20 Jun 2024 - Wes Davis
Test Package : MOB 1

GFL Environmental - 207 - Pickering SW
 1034 TOY AVENUE, PICKERING YARD
 PICKERING, ON
 CA L1W 3P1
 Contact: Ian Patton
 ipatton@gflenv.com
 T: (905)831-6297
 F: (905)426-3577

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.