



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
S0018
Machine Id
828009
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (20 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0123458	GFL0116851	GFL0097450
Sample Date		Client Info		18 Jun 2024	05 Jun 2024	21 Dec 2023
Machine Age	hrs	Client Info		0	75487	75487
Oil Age	hrs	Client Info		0	75487	0
Filter Age	hrs	Client Info		0	75487	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>80	3	10	3
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>2	<1	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	<1	0	0
Aluminum	ppm	ASTM D5185(m)	>30	<1	2	1
Lead	ppm	ASTM D5185(m)	>30	0	0	0
Copper	ppm	ASTM D5185(m)	>150	<1	1	<1
Tin	ppm	ASTM D5185(m)	>5	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	2	2	3
Potassium	ppm	ASTM D5185(m)	>20	<1	1	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0.2	0
Nitration	Abs/cm	ASTM D7624*	>20	5.1	8.6	4.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	17.8	18.7	17.5
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	1	1
Boron	ppm	ASTM D5185(m)	0	4	2	3
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	55	56	55
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	1010	907	914	900
Calcium	ppm	ASTM D5185(m)	1070	993	976	968
Phosphorus	ppm	ASTM D5185(m)	1150	948	923	958
Zinc	ppm	ASTM D5185(m)	1270	1132	1125	1103
Sulfur	ppm	ASTM D5185(m)	2060	2527	2355	2616
Oxidation	Abs/.1mm	ASTM D7414*	>25	13.0	15.6	13.1
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.9	13.6	14.0

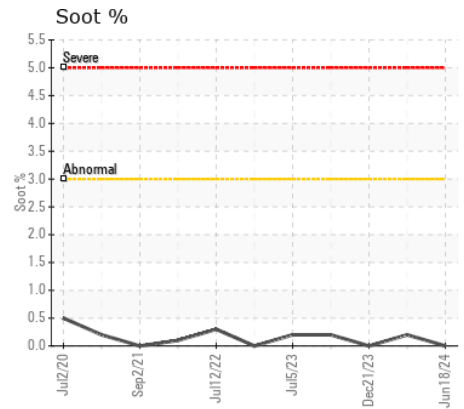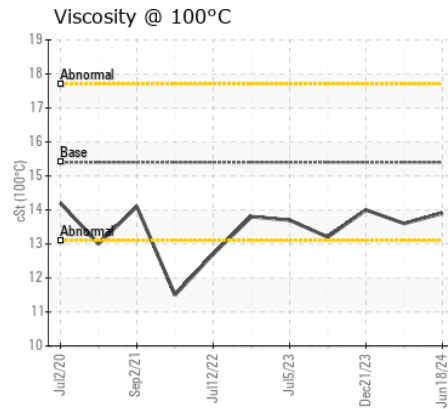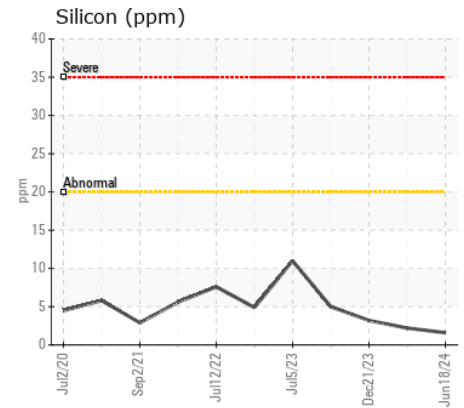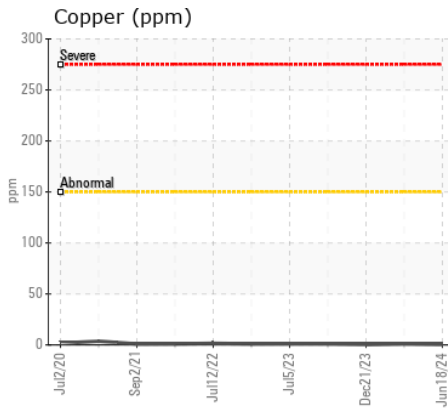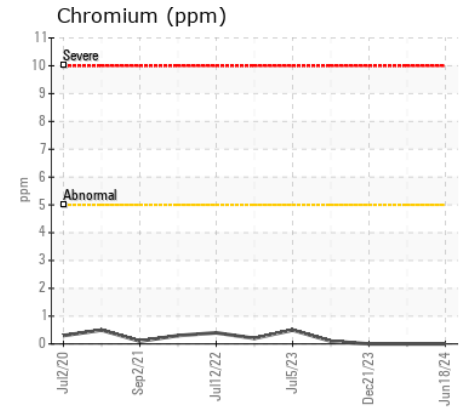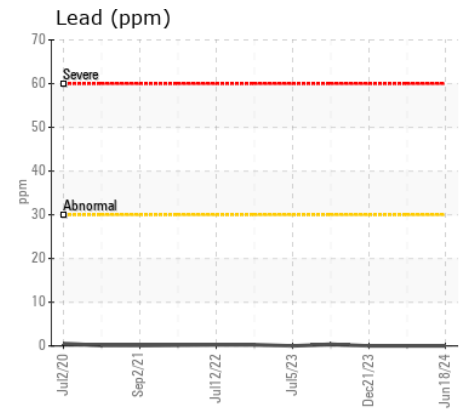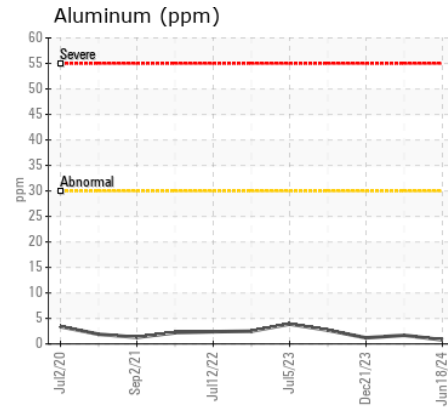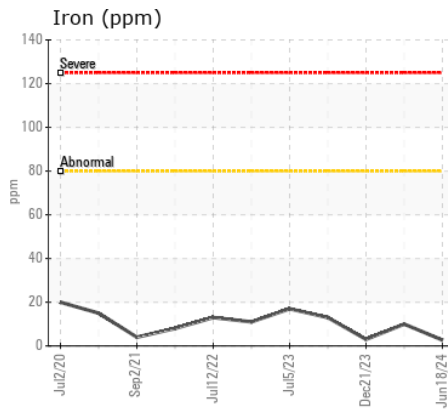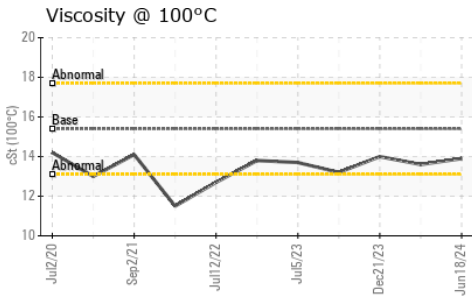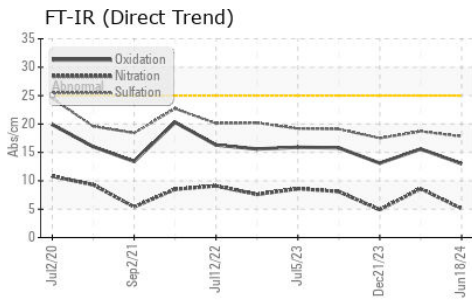

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0123458
Lab Number : 02643178
Unique Number : 5800717
Test Package : MOB 1
Received : 20 Jun 2024
Tested : 20 Jun 2024
Diagnosed : 20 Jun 2024 - Wes Davis

GFL Environmental - 221 - Windsor
 905 Tecumseh Road W
 Windsor, ON
 CA N8W 4J5
 Contact: Pamela-Jean Butler
 pamelajeane.butler@gflenv.com
 T: (519)948-8126
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.